

Chip Inductor

ASCH Series - ISO9001 | ISO14001 | IATF16949




Part Numbering

| A | SCH | 00 | 100505 | 1N0 | S | CP |
|-------|-------------|--------------|----------------------|-----------------|-----------|---------------|
| Grade | Series Name | Control Code | Dimensions Code (mm) | Inductance (nH) | Tolerance | Internal Code |
| | | | 100505 1.0x0.5x0.5 | 1N0 1.0 | S ±0.3nH | 00 General |
| | | | 160808 1.6x0.8x0.8 | 10N 10 | J ±5% | CP Low RDC |
| | | | | R10 100 | | |

This specification applies to Wire Wound Chip Inductors for Automotive Electronics based on AEC-Q200 except for Power train and Safety.


ASCH00100505_CP Type

■ Dimensions



unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

| Part No. | Inductance | L,Q | Q | SRF | RDC | Rated Current | Tolerance |
|--------------------|------------|----------------|------|-----------|---------|---------------|-----------|
| | (nH) | Test Freq. | Min. | (MHz)Min. | (Ω)Max. | (mA)Max. | (±%) |
| ASCH001005051N0□CP | 1.0 | 100 MHz,200 mV | 8 | 10000 | 0.07 | 400 | ±0.3nH |
| ASCH001005051N1□CP | 1.1 | 100 MHz,200 mV | 8 | 10000 | 0.10 | 400 | ±0.3nH |
| ASCH001005051N2□CP | 1.2 | 100 MHz,200 mV | 8 | 10000 | 0.09 | 400 | ±0.3nH |
| ASCH001005051N3□CP | 1.3 | 100 MHz,200 mV | 8 | 9000 | 0.10 | 400 | ±0.3nH |
| ASCH001005051N5□CP | 1.5 | 100 MHz,200 mV | 8 | 9000 | 0.10 | 400 | ±0.3nH |
| ASCH001005051N6□CP | 1.6 | 100 MHz,200 mV | 8 | 8700 | 0.10 | 400 | ±0.3nH |
| ASCH001005051N8□CP | 1.8 | 100 MHz,200 mV | 8 | 8700 | 0.10 | 400 | ±0.3nH |
| ASCH001005052N0□CP | 2.0 | 100 MHz,200 mV | 8 | 8100 | 0.10 | 400 | ±0.3nH |
| ASCH001005052N2□CP | 2.2 | 100 MHz,200 mV | 8 | 8100 | 0.12 | 400 | ±0.3nH |
| ASCH001005052N4□CP | 2.4 | 100 MHz,200 mV | 8 | 7700 | 0.15 | 400 | ±0.3nH |
| ASCH001005052N7□CP | 2.7 | 100 MHz,200 mV | 8 | 7700 | 0.15 | 400 | ±0.3nH |
| ASCH001005053N0□CP | 3.0 | 100 MHz,200 mV | 8 | 6300 | 0.15 | 400 | ±0.3nH |
| ASCH001005053N3□CP | 3.3 | 100 MHz,200 mV | 8 | 6300 | 0.15 | 400 | ±0.3nH |
| ASCH001005053N6□CP | 3.6 | 100 MHz,200 mV | 8 | 6100 | 0.15 | 400 | ±0.3nH |
| ASCH001005053N9□CP | 3.9 | 100 MHz,200 mV | 8 | 6100 | 0.18 | 400 | ±0.3nH |
| ASCH001005054N3□CP | 4.3 | 100 MHz,200 mV | 8 | 6000 | 0.18 | 400 | ±0.3nH |
| ASCH001005054N7□CP | 4.7 | 100 MHz,200 mV | 8 | 6000 | 0.18 | 400 | ±0.3nH |
| ASCH001005055N1□CP | 5.1 | 100 MHz,200 mV | 8 | 5300 | 0.20 | 400 | ±0.3nH |
| ASCH001005055N6□CP | 5.6 | 100 MHz,200 mV | 8 | 5100 | 0.20 | 400 | ±0.3nH |
| ASCH001005056N2□CP | 6.2 | 100 MHz,200 mV | 8 | 4500 | 0.22 | 400 | ±0.3nH |
| ASCH001005056N8□CP | 6.8 | 100 MHz,200 mV | 8 | 4550 | 0.24 | 400 | 5 |
| ASCH001005057N5□CP | 7.5 | 100 MHz,200 mV | 8 | 4200 | 0.24 | 300 | 5 |
| ASCH001005058N2□CP | 8.2 | 100 MHz,200 mV | 8 | 4100 | 0.24 | 300 | 5 |
| ASCH001005059N1□CP | 9.1 | 100 MHz,200 mV | 8 | 3900 | 0.26 | 300 | 5 |
| ASCH0010050510N□CP | 10 | 100 MHz,200 mV | 8 | 3900 | 0.26 | 300 | 5 |
| ASCH0010050512N□CP | 12 | 100 MHz,200 mV | 8 | 3000 | 0.28 | 300 | 5 |
| ASCH0010050515N□CP | 15 | 100 MHz,200 mV | 8 | 2500 | 0.32 | 300 | 5 |
| ASCH0010050518N□CP | 18 | 100 MHz,200 mV | 8 | 2200 | 0.36 | 300 | 5 |
| ASCH0010050522N□CP | 22 | 100 MHz,200 mV | 8 | 1900 | 0.42 | 300 | 5 |
| ASCH0010050527N□CP | 27 | 100 MHz,200 mV | 8 | 1700 | 0.46 | 300 | 5 |


Note: When ordering, please specify tolerance code. Tolerance: C=±0.2nH / S=±0.3nH / J=±5% / K=±10%

1. Operating temperature range - 55°C ~ 125°C
2. Applied the current to coils, the temperature rise shall not be more than 30°C
3. Residual impedance of short chip : 0nH
4. Measure Equipment:

L & Q: Agilent E4991A+Agilent 16197A
 SRF: Agilent E4991A or HP19196C
 RDC: HP4338B or CHEN HWA 502


ASCH00100505_CP Type

Dimensions



unit:mm

Recommended Land Pattern



unit:mm

Electrical Characteristics

| Part No. | Inductance | L,Q | Q | SRF | RDC | Rated Current | Tolerance |
|--------------------|------------|----------------|------|-----------|---------|---------------|-----------|
| | (nH) | Test Freq. | Min. | (MHz)Min. | (Ω)Max. | (mA)Max. | (±%) |
| ASCH0010050533N□CP | 33 | 100 MHz,200 mV | 8 | 1600 | 0.58 | 200 | 5 |
| ASCH0010050539N□CP | 39 | 100 MHz,200 mV | 8 | 1200 | 0.65 | 200 | 5 |
| ASCH0010050547N□CP | 47 | 100 MHz,200 mV | 8 | 1000 | 0.72 | 200 | 5 |
| ASCH0010050556N□CP | 56 | 100 MHz,200 mV | 8 | 800 | 0.82 | 200 | 5 |
| ASCH0010050568N□CP | 68 | 100 MHz,200 mV | 8 | 800 | 0.92 | 180 | 5 |
| ASCH0010050582N□CP | 82 | 100 MHz,200 mV | 8 | 700 | 1.20 | 150 | 5 |
| ASCH00100505R10□CP | 100 | 100 MHz,200 mV | 8 | 900 | 2.00 | 100 | 5 |
| ASCH00100505R12□CP | 120 | 100 MHz,200 mV | 8 | 800 | 2.20 | 100 | 5 |
| ASCH00100505R15□CP | 150 | 100 MHz,200 mV | 8 | 700 | 3.50 | 100 | 5 |
| ASCH00100505R18□CP | 180 | 100 MHz,200 mV | 8 | 600 | 3.80 | 100 | 5 |
| ASCH00100505R22□CP | 220 | 100 MHz,200 mV | 8 | 500 | 4.20 | 100 | 5 |
| ASCH00100505R27□CP | 270 | 100 MHz,200 mV | 8 | 500 | 4.80 | 100 | 5 |

Note: When ordering, please specify tolerance code. Tolerance: C=±0.2nH / S=±0.3nH / J=±5% / K=±10%

1. Operating temperature range - 55°C ~ 125°C
2. Applied the current to coils, the temperature rise shall not be more than 30°C
3. Residual impedance of short chip : 0nH
4. Measure Equipment:
















L & Q: Agilent E4991A+Agilent 16197A

SRF: Agilent E4991A or HP19196C

RDC: HP4338B or CHEN HWA 502
















ASCH00100505_CP Type

Characteristics Graph

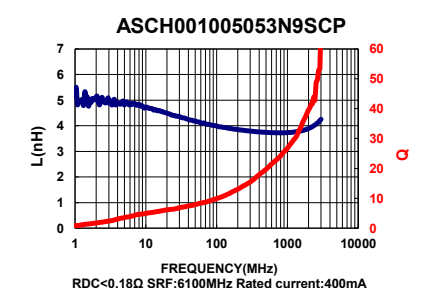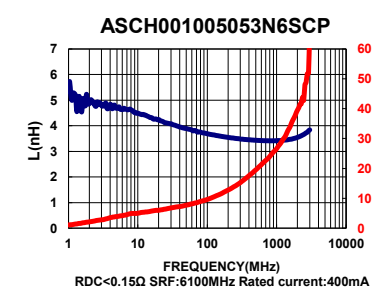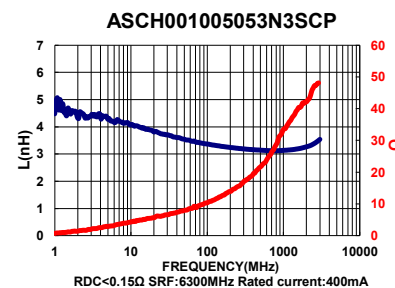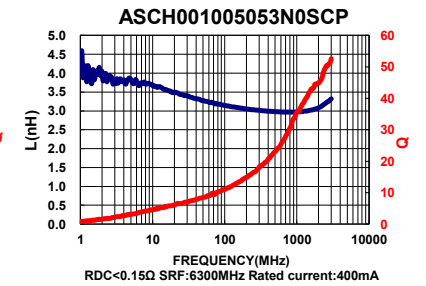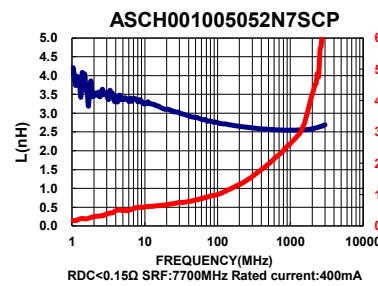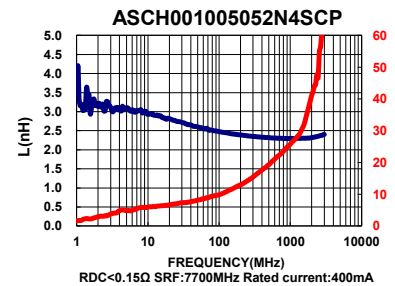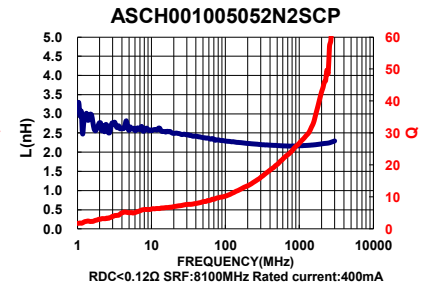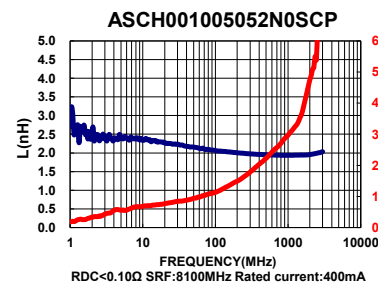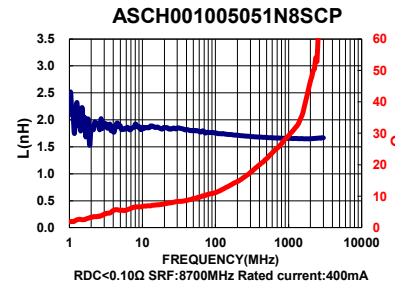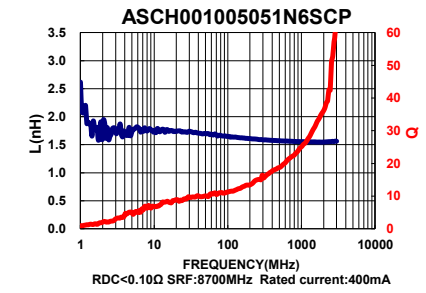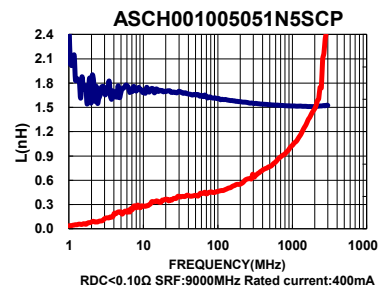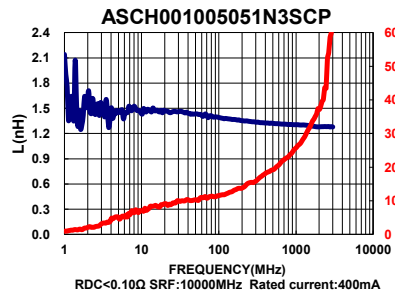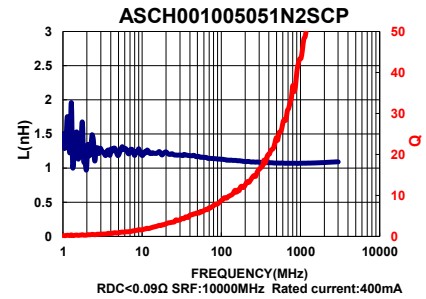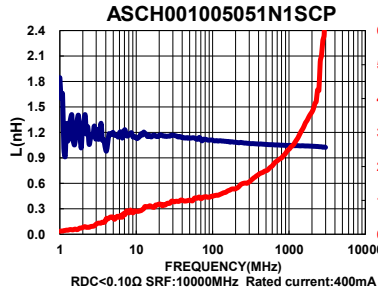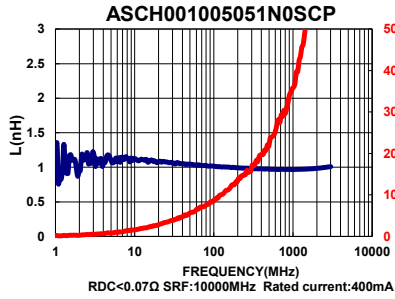













ASCH00100505_CP Type

Characteristics Graph

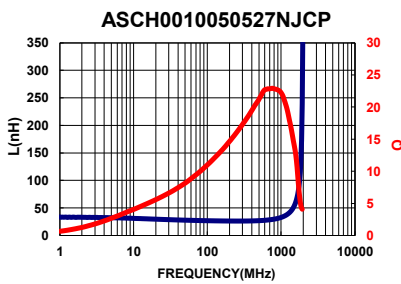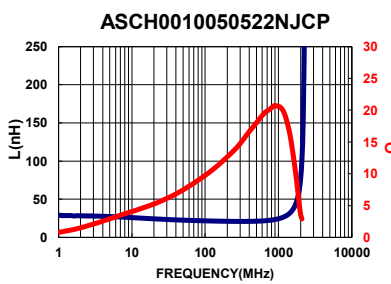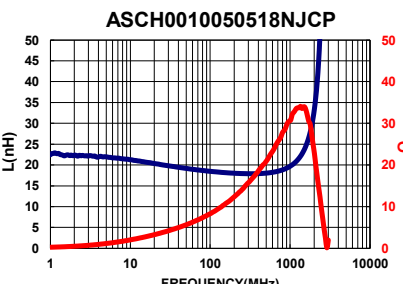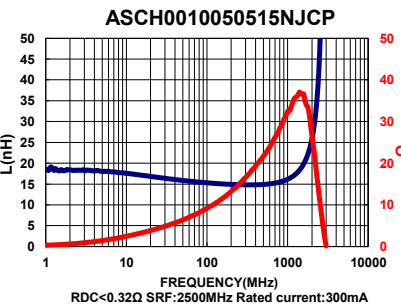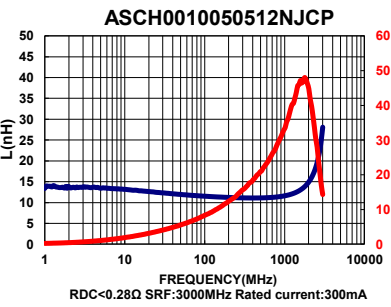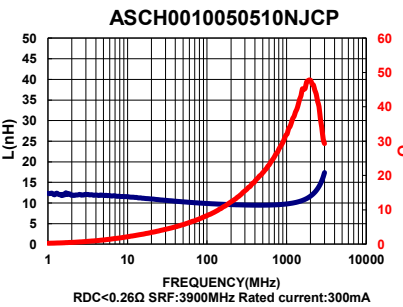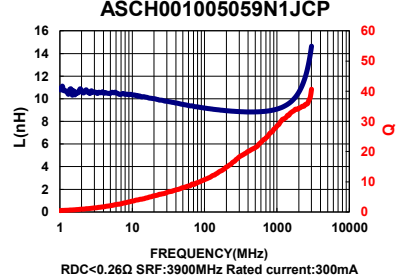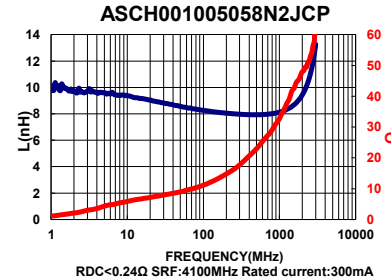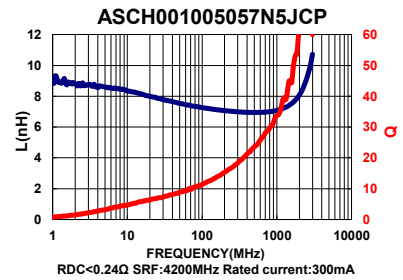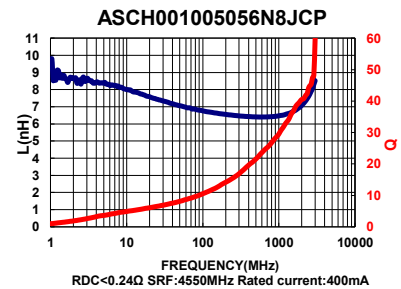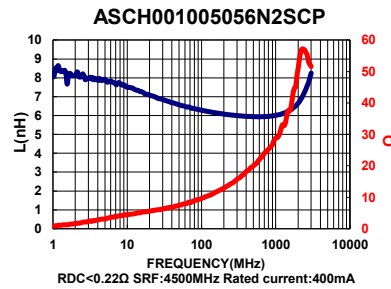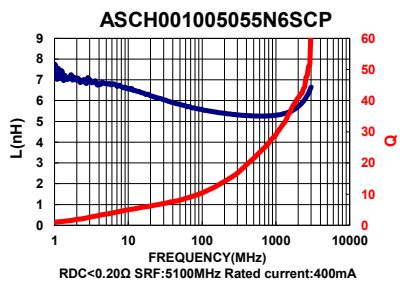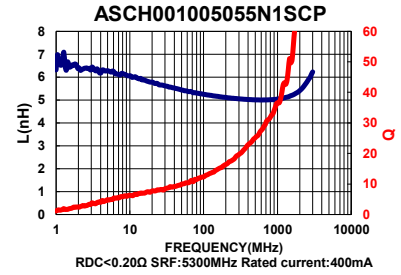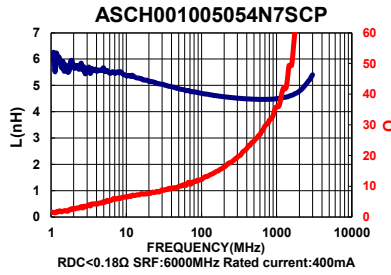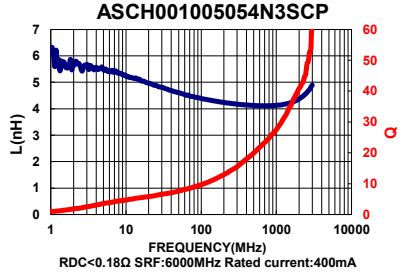


ASCH00100505_CP Type

Characteristics Graph

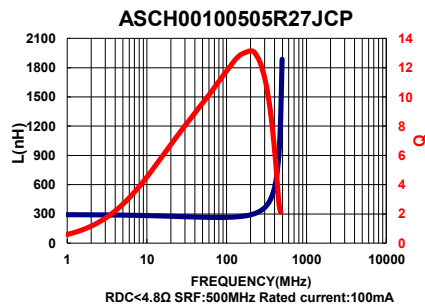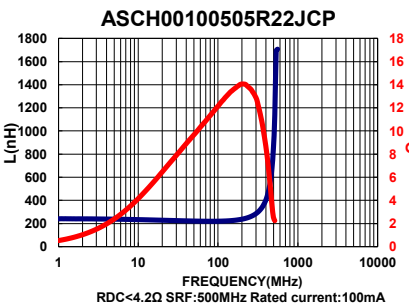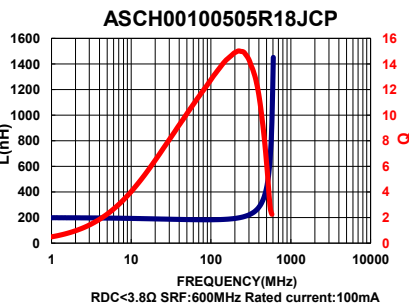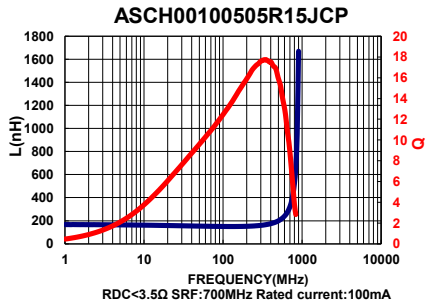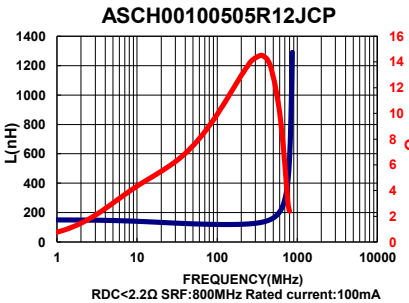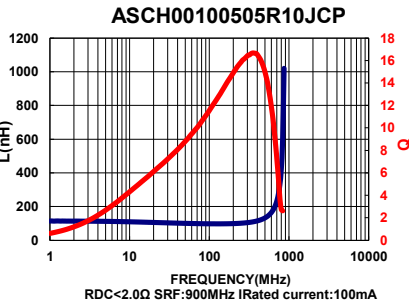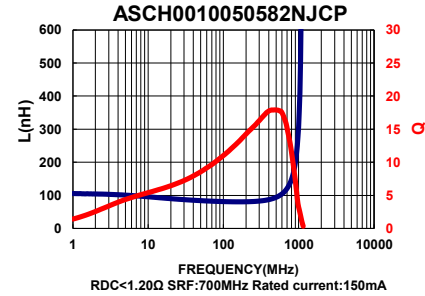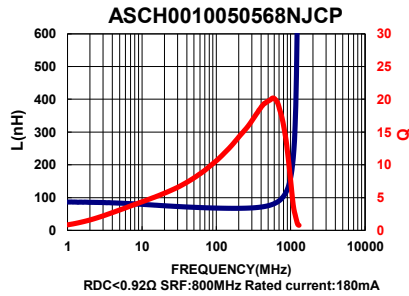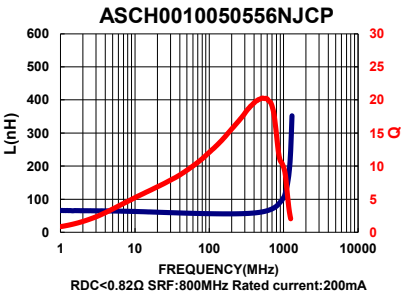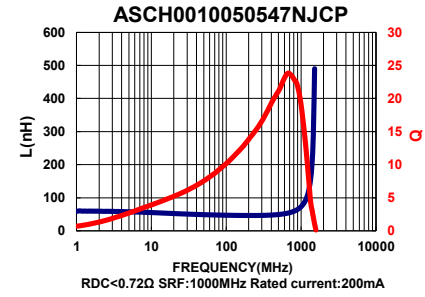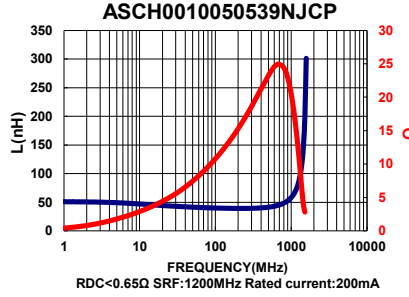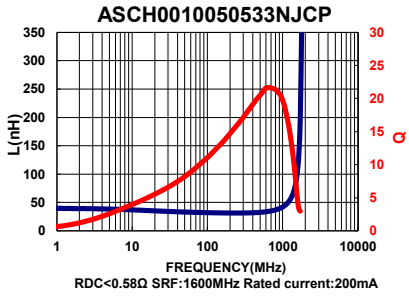


ASCH00160808 Type

Dimensions



unit:mm

Recommended Land Pattern



unit:mm

Electrical Characteristics


| Part No. | Inductance | L,Q | Q | SRF | RDC | IDC | Tolerance |
|--------------------|------------|----------------|------|-----------|---------|----------|-----------|
| | (nH) | Test Freq. | Min. | (MHz)Typ. | (Ω)Max. | (mA)Max. | (±%) |
| ASCH001608081N0□00 | 1.0 | 100 MHz,200 mV | 8 | 10000 | 0.10 | 600 | ±0.3nH |
| ASCH001608081N2□00 | 1.2 | 100 MHz,200 mV | 8 | 10000 | 0.10 | 600 | ±0.3nH |
| ASCH001608081N5□00 | 1.5 | 100 MHz,200 mV | 8 | 8000 | 0.10 | 600 | ±0.3nH |
| ASCH001608081N6□00 | 1.6 | 100 MHz,200 mV | 8 | 8000 | 0.10 | 600 | ±0.3nH |
| ASCH001608081N8□00 | 1.8 | 100 MHz,200 mV | 8 | 8000 | 0.10 | 600 | ±0.3nH |
| ASCH001608082N2□00 | 2.2 | 100 MHz,200 mV | 8 | 7200 | 0.10 | 600 | ±0.3nH |
| ASCH001608082N7□00 | 2.7 | 100 MHz,200 mV | 10 | 6200 | 0.10 | 600 | ±0.3nH |
| ASCH001608083N0□00 | 3.0 | 100 MHz,200 mV | 10 | 5200 | 0.12 | 600 | ±0.3nH |
| ASCH001608083N3□00 | 3.3 | 100 MHz,200 mV | 10 | 5200 | 0.12 | 600 | ±0.3nH |
| ASCH001608083N6□00 | 3.6 | 100 MHz,200 mV | 10 | 5000 | 0.14 | 600 | ±0.3nH |
| ASCH001608083N9□00 | 3.9 | 100 MHz,200 mV | 10 | 5000 | 0.14 | 600 | ±0.3nH |
| ASCH001608084N3□00 | 4.3 | 100 MHz,200 mV | 10 | 4750 | 0.16 | 600 | ±0.3nH |
| ASCH001608084N7□00 | 4.7 | 100 MHz,200 mV | 10 | 4750 | 0.16 | 600 | ±0.3nH |
| ASCH001608085N1□00 | 5.1 | 100 MHz,200 mV | 10 | 4100 | 0.18 | 600 | ±0.3nH |
| ASCH001608085N6□00 | 5.6 | 100 MHz,200 mV | 10 | 4100 | 0.18 | 600 | ±0.3nH |
| ASCH001608086N2□00 | 6.2 | 100 MHz,200 mV | 10 | 3750 | 0.22 | 600 | ±0.3nH |
| ASCH001608086N8□00 | 6.8 | 100 MHz,200 mV | 10 | 3750 | 0.22 | 600 | 5 |
| ASCH001608087N5□00 | 7.5 | 100 MHz,200 mV | 10 | 3300 | 0.24 | 600 | 5 |
| ASCH001608088N2□00 | 8.2 | 100 MHz,200 mV | 10 | 3300 | 0.24 | 600 | 5 |
| ASCH0016080810N□00 | 10 | 100 MHz,200 mV | 12 | 3000 | 0.26 | 600 | 5 |
| ASCH0016080812N□00 | 12 | 100 MHz,200 mV | 12 | 2600 | 0.28 | 600 | 5 |
| ASCH0016080815N□00 | 15 | 100 MHz,200 mV | 12 | 2500 | 0.32 | 600 | 5 |
| ASCH0016080816N□00 | 16 | 100 MHz,200 mV | 12 | 2400 | 0.35 | 600 | 5 |
| ASCH0016080818N□00 | 18 | 100 MHz,200 mV | 12 | 2400 | 0.35 | 600 | 5 |
| ASCH0016080822N□00 | 22 | 100 MHz,200 mV | 12 | 2000 | 0.40 | 500 | 5 |
| ASCH0016080827N□00 | 27 | 100 MHz,200 mV | 12 | 1900 | 0.45 | 500 | 5 |
| ASCH0016080833N□00 | 33 | 100 MHz,200 mV | 12 | 1600 | 0.55 | 400 | 5 |
| ASCH0016080839N□00 | 39 | 100 MHz,200 mV | 12 | 1400 | 0.60 | 400 | 5 |
| ASCH0016080847N□00 | 47 | 100 MHz,200 mV | 12 | 1300 | 0.70 | 400 | 5 |
| ASCH0016080856N□00 | 56 | 100 MHz,200 mV | 12 | 1100 | 0.75 | 400 | 5 |
| ASCH0016080862N□00 | 62 | 100 MHz,200 mV | 12 | 1050 | 0.85 | 400 | 5 |
| ASCH0016080868N□00 | 68 | 100 MHz,200 mV | 12 | 1050 | 0.85 | 400 | 5 |
| ASCH0016080875N□00 | 75 | 100 MHz,200 mV | 12 | 900 | 1.00 | 300 | 5 |
| ASCH0016080882N□00 | 82 | 100 MHz,200 mV | 12 | 900 | 1.00 | 300 | 5 |

Note: When ordering, please specify tolerance code. Tolerance: S=±0.3nH / J=±5%

1. Operating temperature range - 55°C ~ 125°C
2. Applied the current to coils, the inductance shall be less than 10% initial value
3. Residual impedance of short chip : 0nH
4. Measure Equipment:


ASCH00160808 Type

Dimensions



unit:mm

Recommended Land Pattern



unit:mm

Electrical Characteristics

| Part No. | Inductance | L,Q | Q | SRF | RDC | IDC | Tolerance |
|--------------------|------------|----------------|------|-----------|---------|----------|-----------|
| | (nH) | Test Freq. | Min. | (MHz)Typ. | (Ω)Max. | (mA)Max. | (±%) |
| BSCH00160808R10□00 | 100 | 100 MHz,200 mV | 12 | 770 | 1.20 | 300 | 5 |
| BSCH00160808R12□00 | 120 | 50 MHz,200 mV | 8 | 650 | 1.30 | 300 | 5 |
| BSCH00160808R15□00 | 150 | 50 MHz,200 mV | 8 | 550 | 1.70 | 250 | 5 |
| BSCH00160808R18□00 | 180 | 50 MHz,200 mV | 8 | 520 | 1.90 | 250 | 5 |
| BSCH00160808R22□00 | 220 | 50 MHz,200 mV | 8 | 500 | 2.00 | 250 | 5 |
| BSCH00160808R27□00 | 270 | 50 MHz,200 mV | 8 | 470 | 2.20 | 150 | 5 |
| BSCH00160808R33□00 | 330 | 50 MHz,200 mV | 8 | 320 | 2.80 | 100 | 5 |
| BSCH00160808R39□00 | 390 | 50 MHz,200 mV | 8 | 300 | 3.00 | 100 | 5 |

Note: When ordering, please specify tolerance code. Tolerance: S=±0.3nH / J=±5%

1. Operating temperature range - 55°C ~ 125°C
2. Applied the current to coils, the inductance shall be less than 10% initial value
3. Residual impedance of short chip : 0nH
4. Measure Equipment:
















L & Q: Agilent E4991A+Agilent 16197A

SRF: Agilent E4991A or HP19196C

RDC: HP4338B or CHEN HWA 502
















ASCH00160808 Type

Characteristics Graph

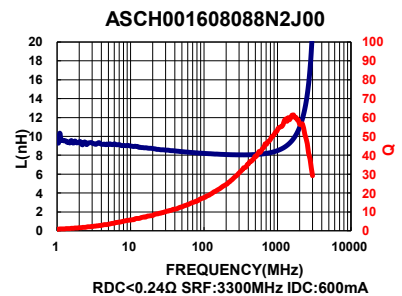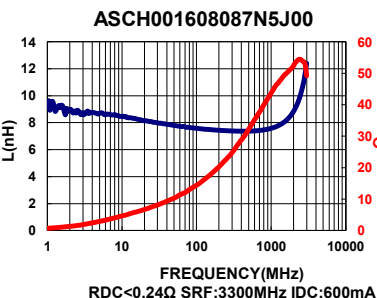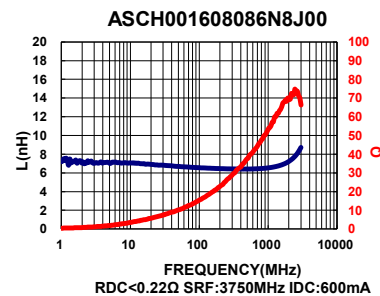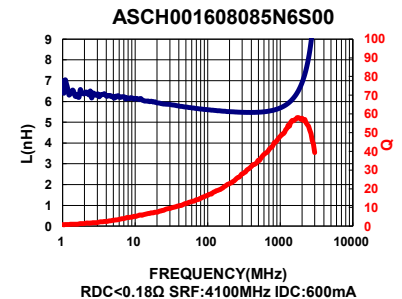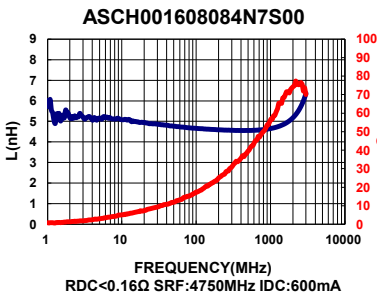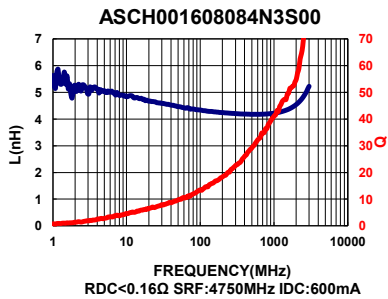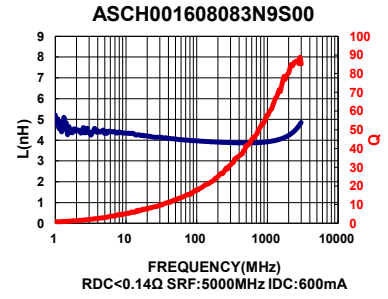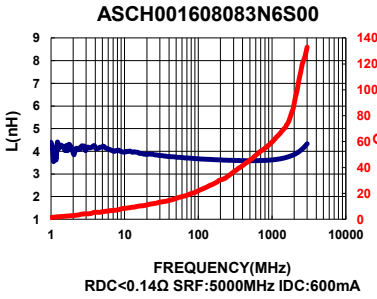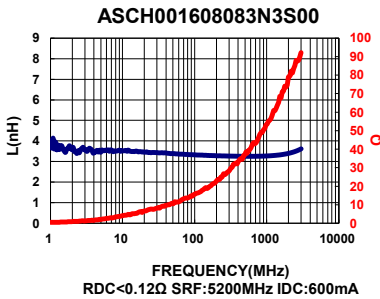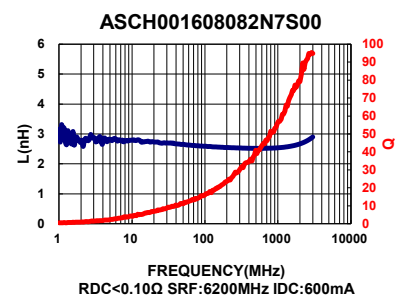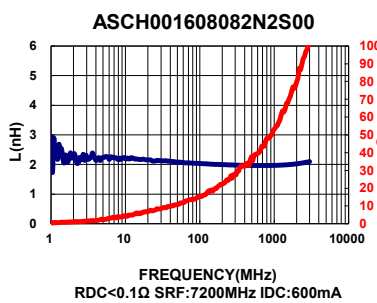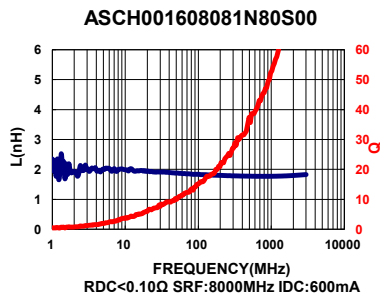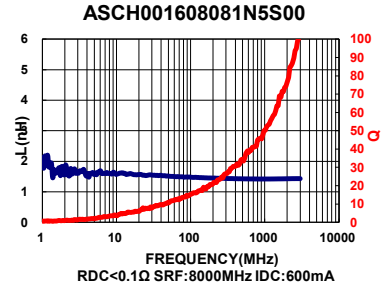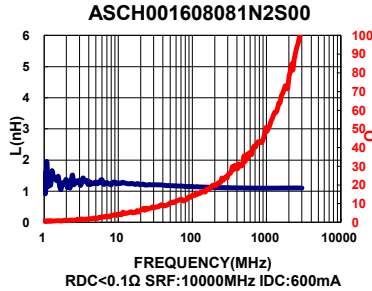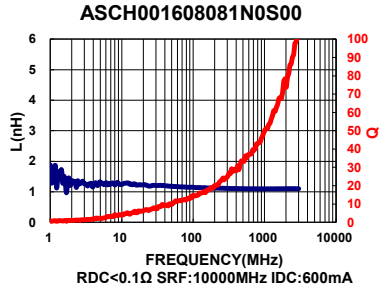








ASCH00160808 Type

Characteristics Graph

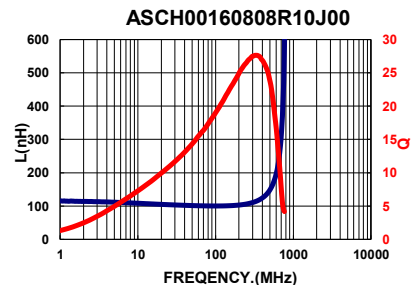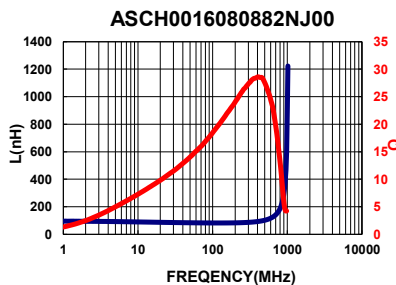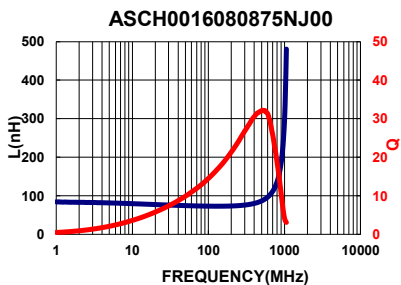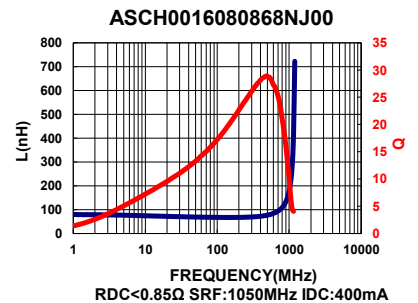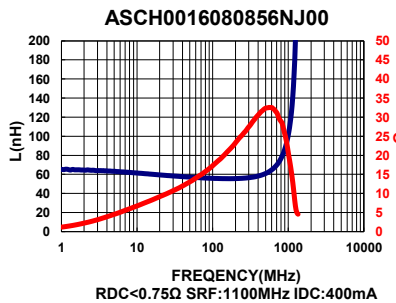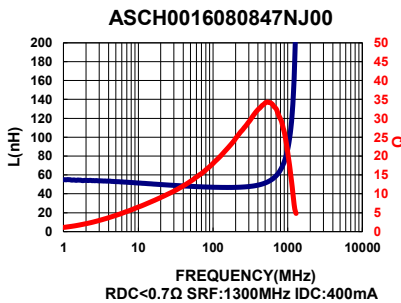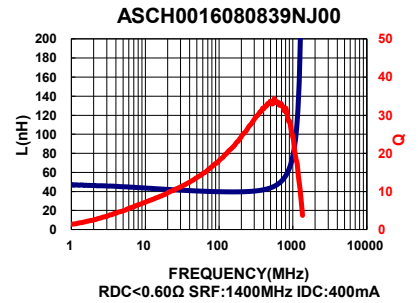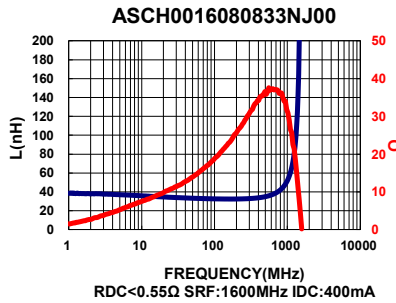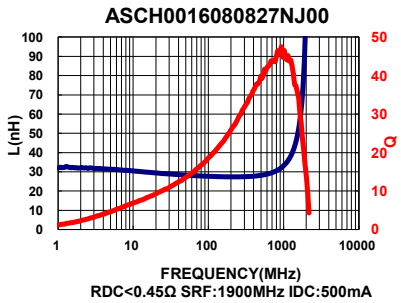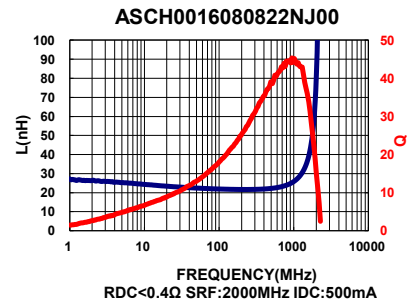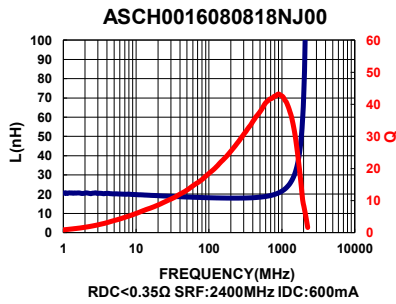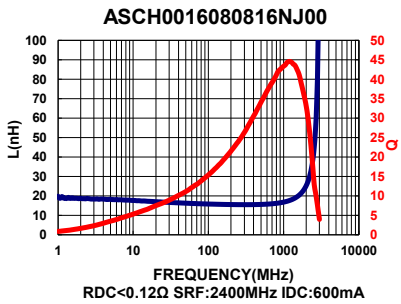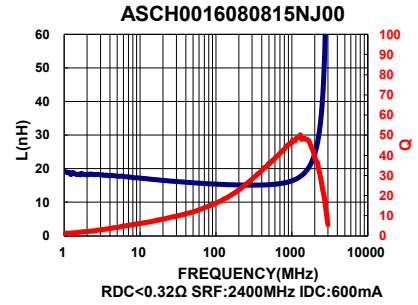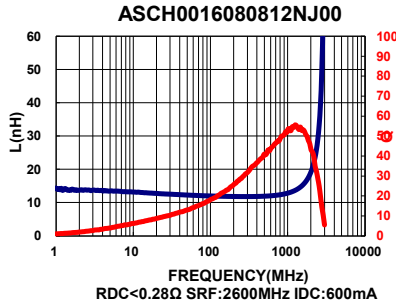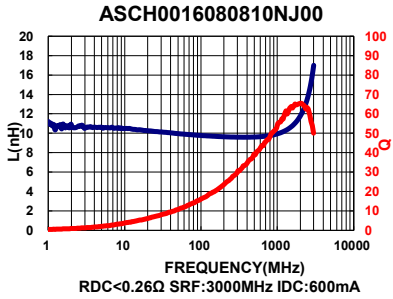


ASCH00160808 Type

Characteristics Graph

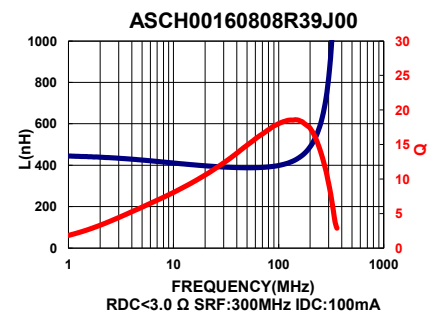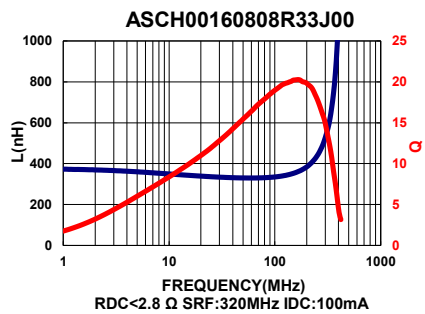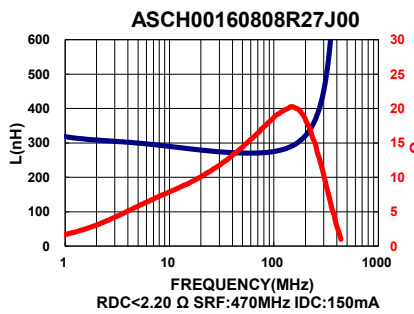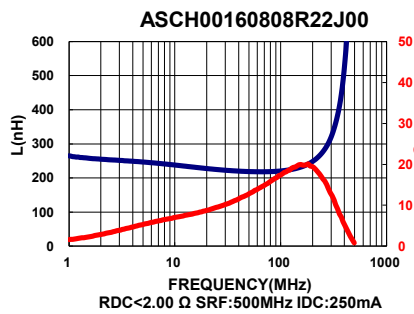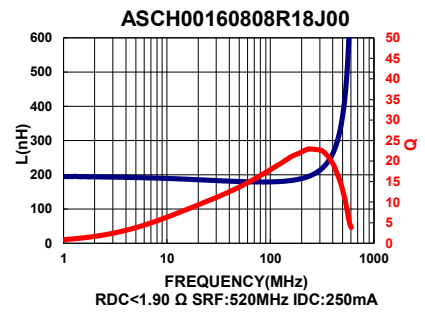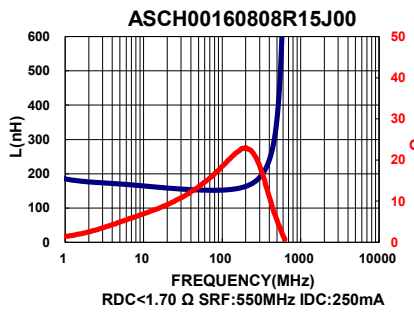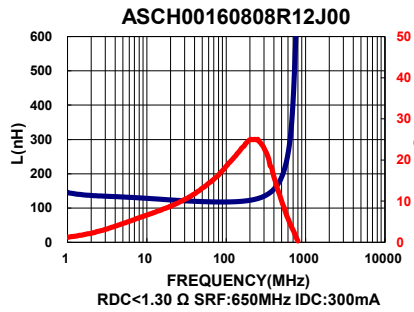


■ Packaging

Tape Dimensions

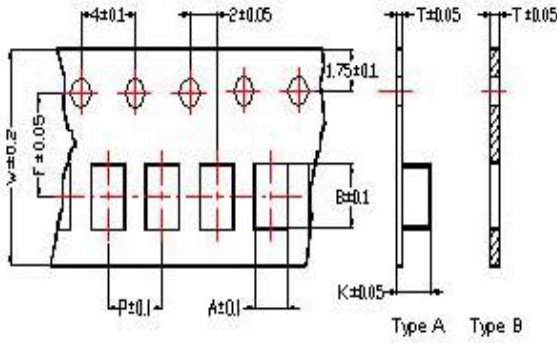


Tape Material

Carrier Tape: Polycarbonate (Tape A)
 Carrier Tape: Paper (Tape B)
 Cover Tape: Polystyrene

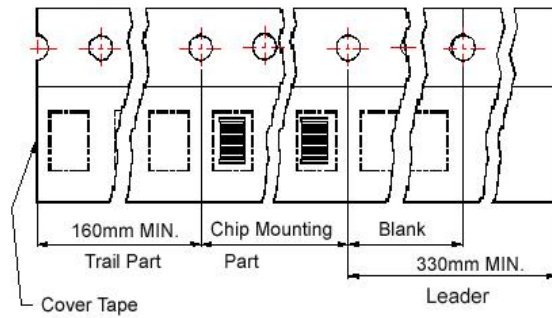

Reel Dimensions

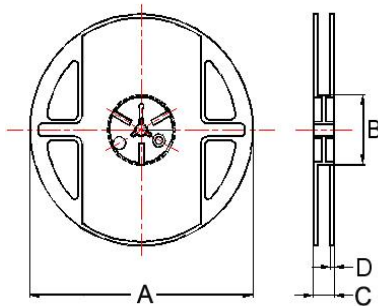

Dimensions in mm

| TYPE | Tape Dimensions | | | | | | | Reel Dimensions | | | | Quantity PCS / Reel |
|--------------|-----------------|------|------|---|---|-----|------|-----------------|----|----|-----|------------------------|
| | A | B | T | W | P | F | Tape | A | B | C | D | |
| ASCH00100505 | 0.62 | 1.12 | 0.60 | 8 | 2 | 3.5 | B | 178 | 60 | 12 | 1.5 | 10000 |
| ASCH00160808 | 1.00 | 1.80 | 0.95 | 8 | 4 | 3.5 | B | 178 | 60 | 12 | 1.5 | 4000 |

For More Information:

Americas - prodinfo_power_americas@yageo.com | Europe - prodinfo_power_emea@yageo.com | Asia - prodinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)