

XDSL SPLITTER FILTER MODULE

B8846NL

SmartER Series



Pulse
A TECHNITROL COMPANY



- ⊕ POTS CO splitter for standard ADSL2/VDSL2 (ITU G993.2) applications
- ⊕ LPF compliant with ETSI complex impedance ($Z_L = 270 \Omega + 750 \Omega / 150 \text{ nF}$), option B of ETSI TS 101-952-1, v1.1.1 and to BT SIN-346 complex impedance ($Z = 320 \Omega + 1050 \Omega / 230 \text{ nF}$)
- ⊕ Part of a standard series which has footprint compatibility
- ⊕ For ADSL, ADSL2+, VDSL and VDSL2 applications
- ⊕ Compliant with Broadband Forum TR-127 standard for VDSL2 applications
- ⊕ Patented technology US7598837, US7598839, CN1667763, EP1644943, TWI316724, CA2531599

Electrical Specifications @ 25°C

PARAMETER	FREQUENCY	
POTS Impedance	100 Hz to 4 kHz	$Z_L=270 \Omega+750 \Omega /150 \text{ nF} - Z=320 \Omega+1050 \Omega /230 \text{ nF}$
POTS Insertion Loss	1 kHz	1d dB MAX
POTS Insertion Loss Distortion relative to 1 kHz	200 Hz to 4 kHz	1 dB MAX
POTS Return Loss	300 Hz to 2 kHz	18 dB MIN
	2 kHz to 3.4 kHz	14 dB MIN
POTS Group Delay	200 Hz to 4 kHz	200 μs MAX
Longitudinal Balance	50 Hz to 600 Hz	40 dB MIN
	600 Hz to 3.4 kHz	46 dB MIN
	3.4 kHz to 4 kHz	40 dB MIN
xDSL Insertion Loss	32 kHz to 140 kHz	45 dB MIN
	140 kHz to 30 MHz	55 dB MIN
DC Current		80 mA MAX
Total DC Resistance		50 Ω MAX

The mechanical and schematic are on the next page.

XDSL SPLITTER FILTER MODULE

B8846NL


SmartER Series



Pulse
A TECHNITROL COMPANY

Mechanical

B8846NL

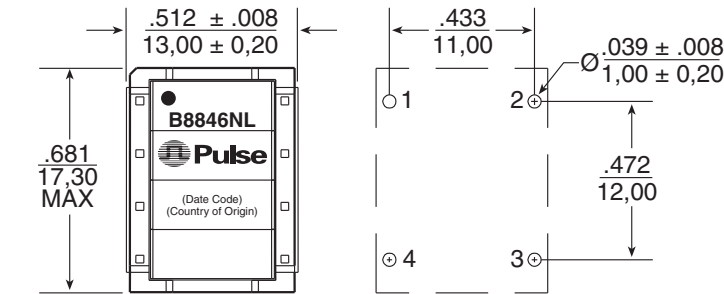


SUGGESTED BOARD LAYOUT

Weight 5.0 grams
 Tray80/tray
 Dimensions: Inches
 mm
 Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0,25}$

Schematic

B8846NL

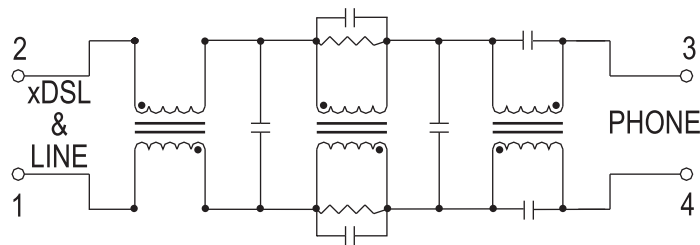

For More Information:

Pulse Worldwide Headquarters
 12220 World Trade Dr.
 San Diego, CA 92128
 U.S.A.
www.pulseeng.com

Pulse Europe
 Zeppelinstrasse 15
 D-71083 Herrenberg
 Germany

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Rd.
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057
 Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China
 Room 2704/2705
 Super Ocean Finance
 Ctr.
 2067 Yan An Rd. West
 Shanghai 200336
 China
 Tel: 86 21 62787060
 Fax: 86 2162786973

Pulse South Asia
 135 Joo Seng Rd.
 #03-02
 PM Industrial Bldg.
 Singapore 368363
 Tel: 65 6287 8998
 Fax: 65 6287 8998

Pulse North Asia
 3F, No. 198
 Zhongyuan Rd.
 Zhongli City
 Taoyuan County 320
 Taiwan R. O. C.
 Tel: 886 3 4356768
 Fax: 886 3 4356823 (Pulse)
 Fax: 886 3 4356820 (FRE)

Tel: 858 674 8100
 Fax: 858 674 8262

Tel: 49 7032 7806 0
 Fax: 49 7032 7806 135

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2010. Pulse Engineering, Inc. All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)