
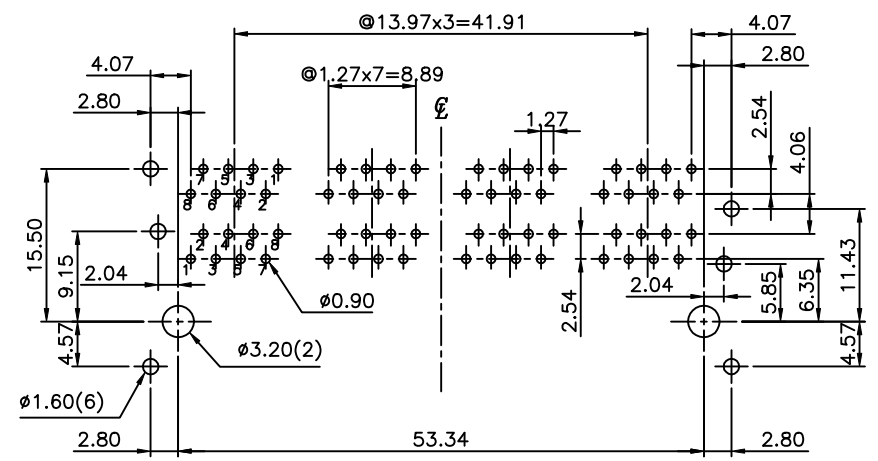


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD P/N	JAMY 8/31/05	
△		ADD P/N	JAMY 9/08/05	

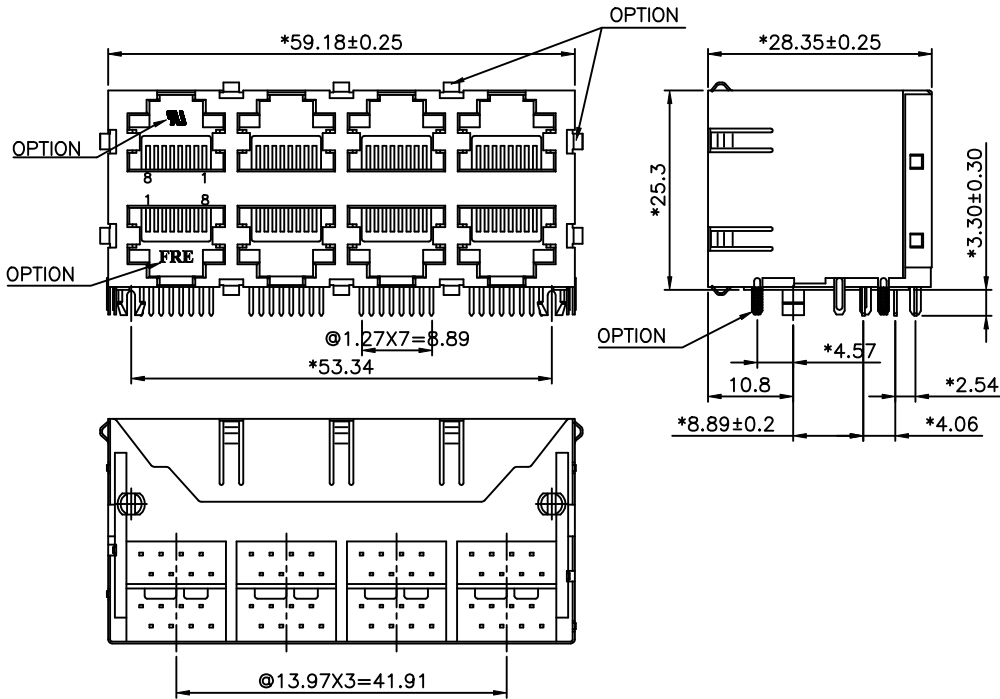

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

- HOUSING & INSERT MATERIAL : NYLON+30%.G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE, t=0.35mm.
- SHIELD MATERIAL : COPPER ALLOY, t=0.25mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

- STORAGE : -40°C TO +85°C.
  - OPERATION: -40°C TO +85°C.
  - WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.  
CUL FILE NO. E163191

ROHS PART NUMBER: E5908-XXCXXX-L

- 1-W/O TABS
- 2-W/ TOP TABS
- 3-W/ SIDE TABS
- 4-W/ TOP&SIDE TABS
- 5-W/ TOP&BOTTOM&SIDE TABS
- 1- 3u" 2- 6u" 3-15u"
- 4-30u" 5-50u"
- 10-FRONT PEG 4.57,W/O PANEL STOP,W/O LOGO. △
- 15-FRONT PEG 4.57,W/O PANEL STOP,W/FRE&UL LOGO.
- 1E-FRONT PEG 4.57,W/O PANEL STOP,W/FRE W/O UL LOGO. △
- T- Tin V- Nickel Q- GOLD
- J- W/NICKEL PLATED WITH TINNED GROUNDING PEG

DETACHED LISTS	MM (INCH)	DFTO YAN	DATE 04/27/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD JAMY	DATE 2005/09/08		
		MFO	DATE		
		APPV LUSASE	DATE 2005/09/08		
	MM			TITLE STAMPED PIN III	
	.0 ± 0.2 ±			STACKED GANGED JACK, 2X4	
	.00 ± 0.15 ±			DRAWING NO. GE593B51-LA	SIZE A3
	.000 ± 0.075 ±			/PART NO. SEE NOTE	REV 2
	ANGLES ± 0.5	QTY :		DO NOT SCALE DRAWING	
	THIRD ANGLE PROJECTION	FINISH :		SHEET 1 OF 1	
		SCALE : 1.5 : 1			

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)