

Description:

Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M

Series: Stubby Antenna



W1698 / W1699

Features:

- Small form factor monopole
- Antenna size W x H:

W1698 / W1699 (10.4 x 49.6mm)

W1698-M (12 x 50mm)

- Connector Type:

W1698 SMA (male)

W1699 RP-SMA (male)

W1698-M SMA (male)

- RoHS Compliant Product



W1698-M

Applications:

- Tri-band Combo
- Frequency range:
 868 / 915 / 2400 2500 MHz
- IoT, M2M Applications
- Sigfox, Lora
- Bluetooth, BLE, WiFi

All dimensions are in mm

Issue: 1911

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Tel: 1-360-944-7551 Downloaded From Oneyac.com

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998 1



TECHNICAL DATA SHEET

Description:

Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M

ELECTRICAL SPECIFICATIONS

Frequency 868-928MHz

2400-2500MHz

Nominal Impedance 50Ω

VSWR 3 868-928MHz

3 2400-2500MHz

Peak Gain 0.3dBi 868-928MHz

1.2dBi 2400-2500MHz

Efficiency 64% / 70%

Radiation Pattern Omni

Polarization: Linear

Power withstanding 5W

Issue: 1911

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description:

Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M

MECHANICAL SPECIFICATIONS

Weight W1698 / W1699: 7.5g

W1698-M: 7.8g

Antenna Color Black

Connector type W1698/W1698-M SMA(Male)

W1699 RP-SMA(Male)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -30/+75 ° C

Storage Temperature -30/+75 ° C

Ingress Protection IP65 (W1698-M)

IP42 (W1698 and W1699)

Wind-loading 100km/h

RoHS Compliant Yes





Description:


Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M


Series: Stubby Antenna

MECHANICAL DRAWING

W1698 / W1699

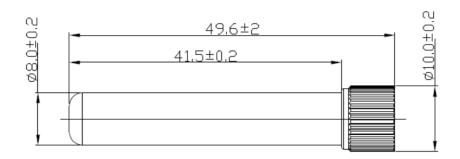

W1698-M

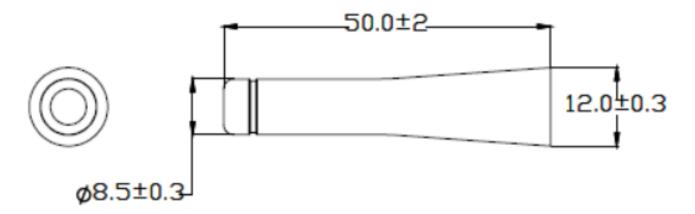




TECHNICAL DATA SHEET

Description:

Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M

TEST SETUP

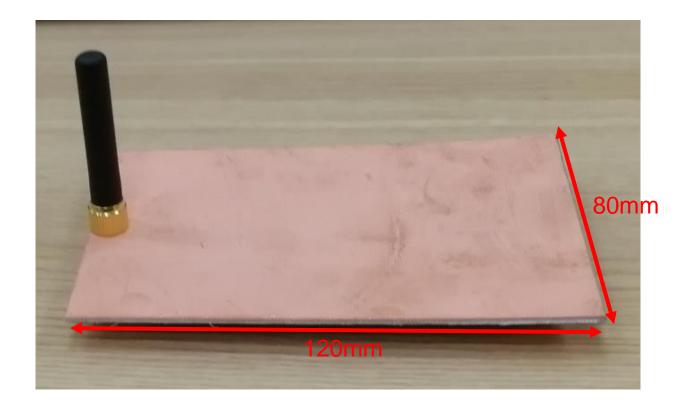

Test with 80mm*120mm ground plane.





TECHNICAL DATA SHEET


Description:

Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M

CHARTS

Return Loss vs Frequency

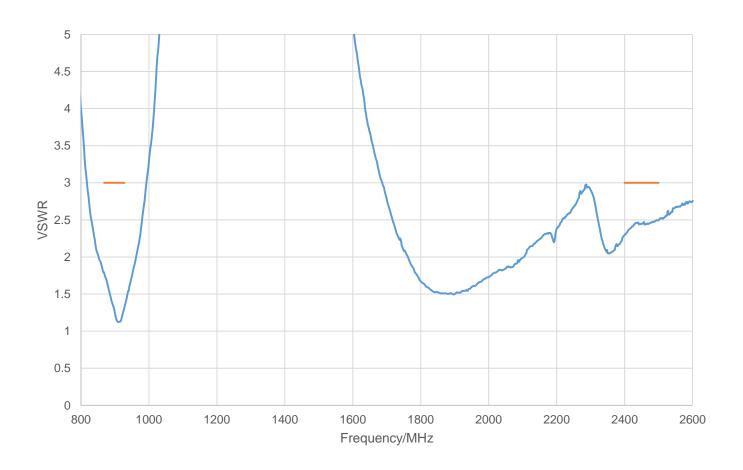





Description:


Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M


Series: Stubby Antenna

CHARTS

Peak Gain vs Frequency

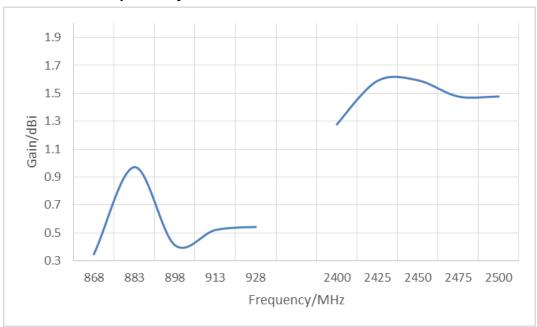

Radiation Efficiency vs Frequency

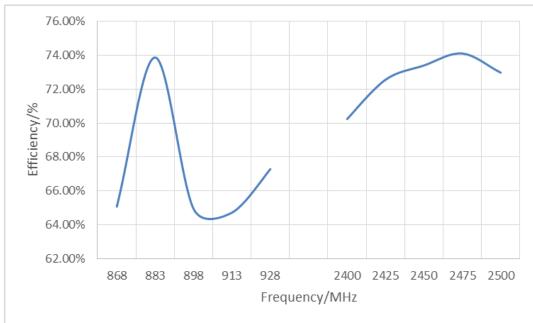

Issue: 1911

ROHS



Description:


Tri-Band 868/915/2400-2500MHz, Straight


PART NUMBER: W1698/W1699/W1698-M


Series: Stubby Antenna

CHARTS

Free Space Radiation Pattern(868-928MHz)

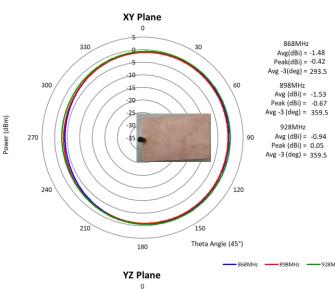

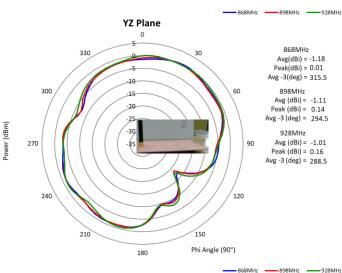

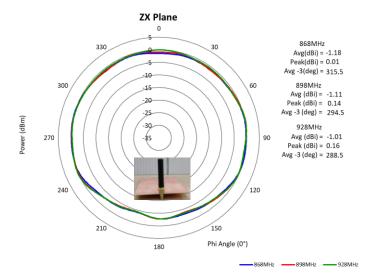



TECHNICAL DATA SHEET


Description:


Tri-Band 868/915/2400-2500MHz, Straight


PART NUMBER: W1698/W1699/W1698-M

CHARTS

Free Space Radiation Pattern(2400-2500MHz)

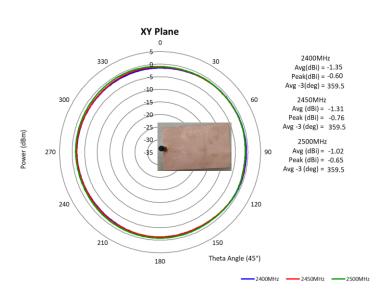

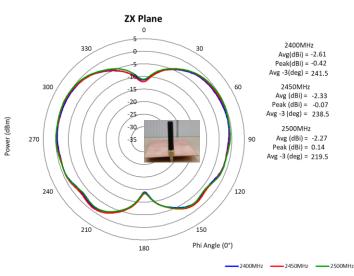

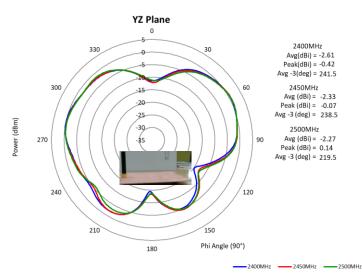



TECHNICAL DATA SHEET

Description:

Tri-Band 868/915/2400-2500MHz, Straight

PART NUMBER: W1698/W1699/W1698-M

PACKAGING

1pcs antenna per PE bag

24pcs PE bags per tray

14pcs trays per package box(2 pcs empty tray)

288pcs antenna per package

Package box: 460mm*235mm*140mm

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)