

TECHNICAL DATA SHEET

Description:

Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900



Features:

- 617-960 MHz
- 1400-2700 MHz
- 3200-3900 MHz
- Omni pattern in H-plane
- Gain 1 / 2.5 / 3 dBi
- Power rating 5W
- IP65
 RoHS Compliant



- LTE Routers / Gateways
- , 4G / 5G LTE
 - 617-960/1400-2170/2300-2700/3200-3900MHz
 - Includes New Band 71 (617-698 MHz) and CBRS Bands
 42 and 48 (3.4-3.7 GHz)

All dimensions are in mm / inches

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998 1



TECHNICAL DATA SHEET

Description:

Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900

ELECTRICAL SPECIFICATIONS

Frequency 617-960/1400-2700/3200-3900 MHz

Nominal Impedance 50Ω

VSWR 3:1(Max)

Radiation Pattern **Omni**

Peaking Gain (typical) 1dBi @617-960MHz

Peaking Gain (typical) 2.5 dBi @1400-2700MHz

Peaking Gain (typical) 3 dBi @ 3200-3900MHz

@617-960MHz Efficiency 45% (typical)

Efficiency (typical) 70% @1400-2700MHz

Efficiency (typical) 70% @ 3200-3900MHz

Polarization Linear-Vertical

5W Power Withstanding

MECHANICAL SPECIFICATIONS

Plastic radome ABS/PC

Color Black

Connector Type SMA-M

Flammability **UL94-V0**

Ingress Protection IP65

Weight 56.8 g

228.84[9.01] mm [INCHES] Overall Length

Position 0°. 45° & 90°



TECHNICAL DATA SHEET

Description:

Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range -40/+85 ° C

Non-operating temperature range -40/+85 ° C

Temperature Shock 3 CYCLES, -25°C TO +70°C AT 5° PER MIN

Humidity

Cyclic Mil-Std-810 Method 507.3, Procedure III 5 cycles @ 95% RH

Vibration

Random 5-500 Hz FREQ, MIL STD 810 G section 514.4

Mechanical Shocks 4.78 m/s

Drop test 1 meter, 10 times to tile

RoHS Compliant Yes





TECHNICAL DATA SHEET


Description:

Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900

Series: Omni Antenna

MECHANICAL DRAWING

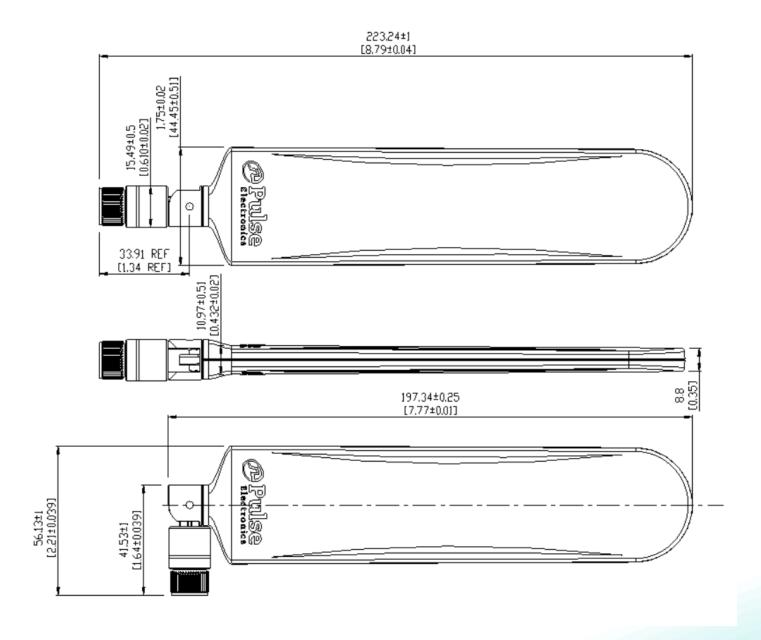





Description:

Multiband Swivel Dipole 617-3900MHz

TECHNICAL DATA SHEET

PART NUMBER: SPDA24617/3900

Series: Omni Antenna

TEST SETUP

Setup1: straight



Setup2: bending-90°



Note: All is test in free space. And the Radiation Pattern 2D is only test in setup1-straight.





TECHNICAL DATA SHEET

Description:


Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900

CHARTS

Voltage Standing-Wave Ratio

SPDA24617-3900

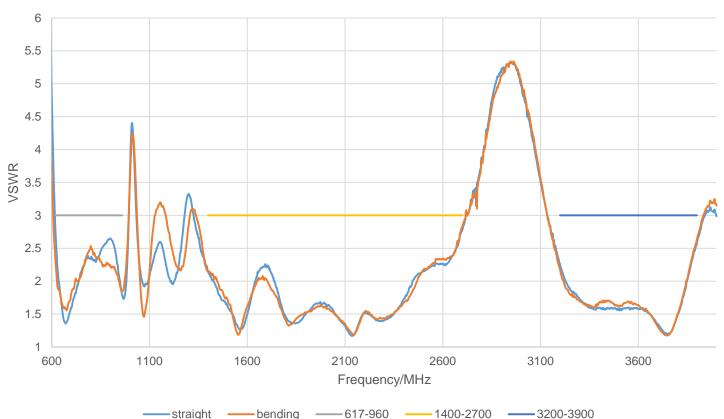





TECHNICAL DATA SHEET

Description:


Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900

Series: Omni Antenna

CHARTS

Peaking Gain

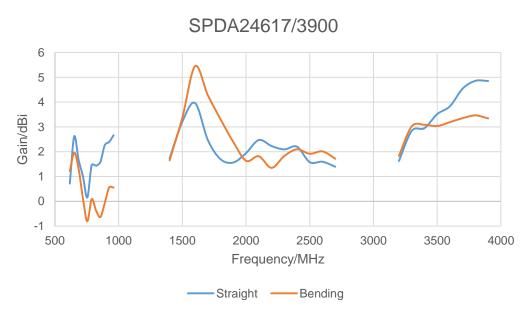

Radiation Efficiency

90.00% 80.00% Efficiency/% 70.00% 60.00% 50.00% 40.00% 30.00% 500 1000 1500 2000 2500 3000 3500 4000 Axis Title

SPDA24617/3900





Straight



TECHNICAL DATA SHEET


Description:


Multiband Swivel Dipole 617-3900MHz


PART NUMBER: SPDA24617/3900

CHARTS

Radiation Pattern 2D(617-960MHz)

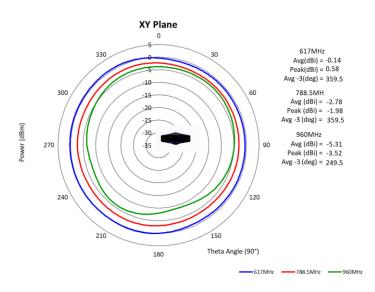

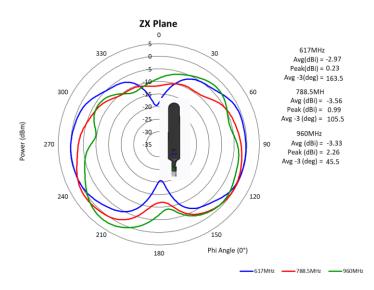

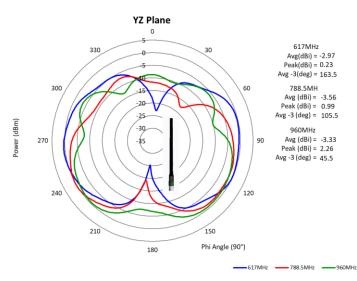



TECHNICAL DATA SHEET


Description:


Multiband Swivel Dipole 617-3900MHz


PART NUMBER: SPDA24617/3900

CHARTS

Radiation Pattern 2D(1400-2700MHz)

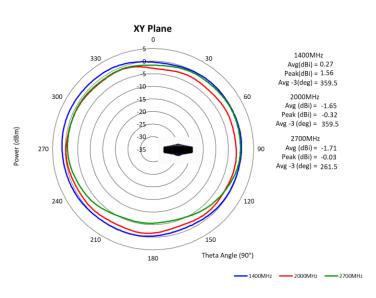

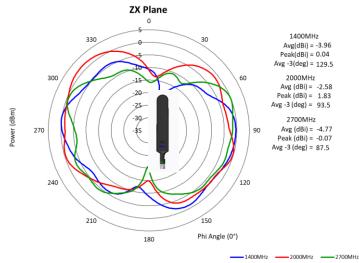

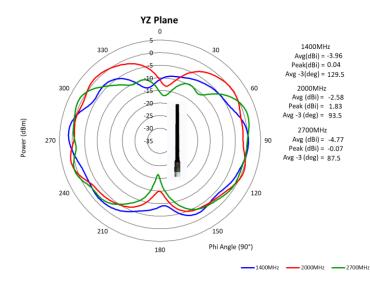



TECHNICAL DATA SHEET


Description:


Multiband Swivel Dipole 617-3900MHz


PART NUMBER: SPDA24617/3900

CHARTS

Radiation Pattern 2D(3200-3900MHz)

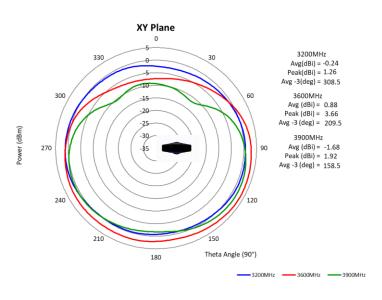



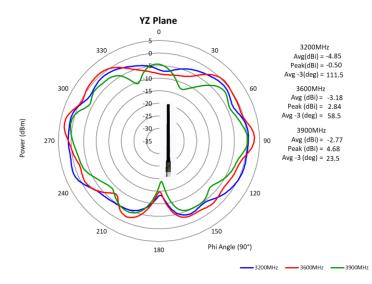



TECHNICAL DATA SHEET

Description:

Multiband Swivel Dipole 617-3900MHz

PART NUMBER: SPDA24617/3900

PACKAGING

1 PCS/PE bag 100 PCS/Carton box



单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)