




| REVISION RECORD | | |
|-----------------|----------------------|--------------------|
| REV | DESCRIPTION | DRFT |
| 11 | OLD DRAWING CHECK IN | APFU 10/12/07 |
| 12 | MODIFY DRAWING | Yuki 9/19/08 |
| 13 | REASSIGN PIN NUMBER | Victor 27/03/12 |

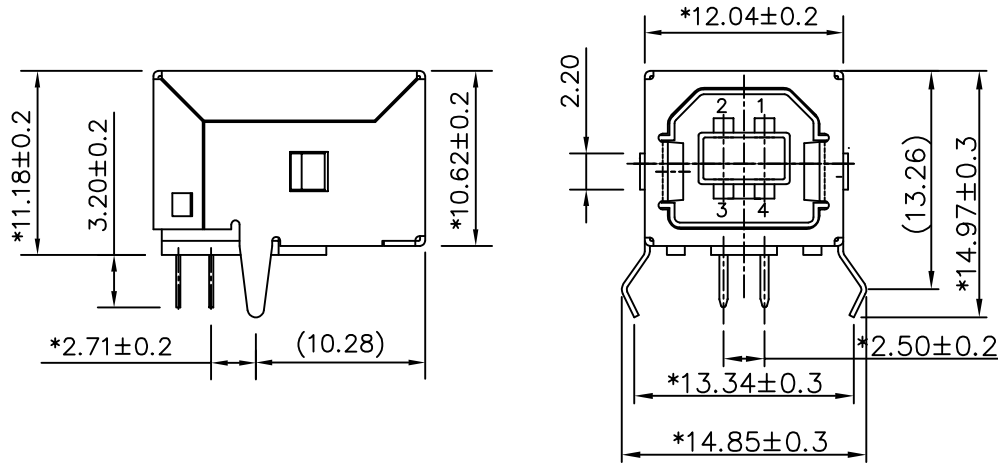

NOTES:

- MATERIAL:**
 TERMINAL—C5191 PHOSPHOR BRONZE HARD.
 SHIELD—COPPER ALLOY
 HOUSING—PBT+30% G.F. UL94V-0
 - PLATING:** CONTACT—GOLD PLATING OVER NICKEL
 TERMINAL—75u" Tin MIN OVER 50u"~100u" NICKEL Δ
 SHIELD—120u" TIN MIN OVER 50u" NICKEL.
 OR 100u"~120u" NICKEL OVER 40u" Cu.
 - GAP:** 0.25mm (Max.)
 - ELECTRICAL:**
 VOLTAGE RATING : 30 VAC RMS.
 CURRENT RATING : 1.0 AMP
 CONTACT RESISTANCE : 30 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGOHMS MIN @500 VDC
 DIELECTRIC STRENGTH : 750 VAC RMS 60 HZ, 1 MIN
 OPERATING LIFE : 1500 CYCLES MIN
 MATING FORCE : 3.5 KGS MAX
 UNMATING FORCE : 1 KGS MIN
 - ENVIRONMENTAL:**
 STORAGE : -40°C TO +85°C
 OPERATION : -40°C TO +85°C
 CAPACITANCE : 2 PF MAX 1KHZ
 WAVE SOLDER TEMPERATURE: 230-250°C.(3-5 SECONDS)
 ROHS COMPLIANT
 - UL & CUL FILE NO. E163191**
- OLD DRAWING NUMBER:GE813A02-LC

| ROHS P/N | REV | MATERIAL | SHIELD PLATING | PLATING |
|----------------|-----|-----------|----------------|---------|
| E8144-B01321-L | A | PBT WHITE | PLATING NICKEL | Au3u" |

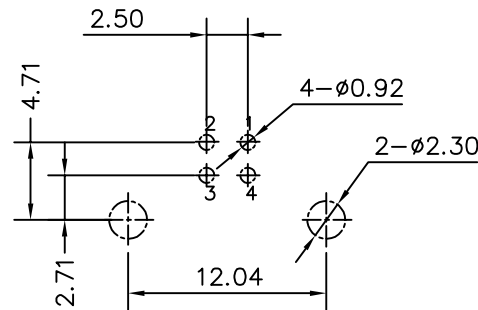

USB-PCB LAYOUT

| ← MM (INCH) → | | DFTO SAMMY | DATE 03/14/05 | | RoHS Compliant |
|----------------------------|---|---------------|----------------|-----------------------------|----------------|
| TOLERANCES EXCEPT AS NOTED | | CHKD ALICE | DATE 3/29/2012 | | |
| MM | ± | APPLV.TIM | DATE 3/29/2012 | TITLE USB Series B | |
| .0 ± 0.20 | ± | MATERIAL : | | | |
| .00 ± 0.15 | ± | ANGLES ± 0.5° | | DRAWING NO. E8144-B0XX2X-L2 | |
| .000 ± 0.075 | ± | QTY : | | | |
| THIRD ANGLE PROJECTION | | FINISH : | | /PART NO. E8144-B0XX2X-L2 | |
| | | SCALE : 3:1 | | DO NOT SCALE DRAWING | |
| | | | | SHEET 1 OF 1 | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)