



Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758SF

Features:

- Omnidirectional antenna
- Tri Band Monopole:
- VHF:150-174 MHz
- UHF: 430-520 MHz
- 7/800: 750-870 MHz
- Flexible Spring, Impact Resistant
- Connector NMO (Pogo contact)
- IP67
- RoHS Compliant

Applications:

- Motorola APX-8500
- Harris Unity mobile



Issue: 2036

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Tel: 1-360-944-7551 Downloaded From Oneyac.com

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758SF

ELECTRICAL SPECIFICATIONS

Antenna type* Tri Band Monopole

Frequency 150-174/430-520/750-870 MHz

Nominal Impedance 50 Ω

VSWR VHF: 150-165 MHz <2:1

VHF: 165-174 MHz <2.5:1 UHF: 430-490 MHz <2:1 UHF: 490-520 MHz <2.5:1

7/800: 750-870 MHz <2:1

Gain 0/5/4 dBi

Efficiency 60/70/70 %

Radiation Pattern Omni
Polarization Vertical
Power withstanding 100 W

Connector type NMO (Pogo contact)

MECHANICAL SPECIFICATIONS

Color/Material Black / S.S Whip

Weight 183 g

Overall Length 443.7 mm (17.47")

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40 ~ +85° C

RoHS Compliant Yes

Issue: 2036



^{*}Measured on Ø52" (1.32m) Ground plane






Description: NMO, Tri Band 150-174/430-520/750-870MHz

PART NUMBER: NMO150/450/758SF

MECHANICAL DRAWING

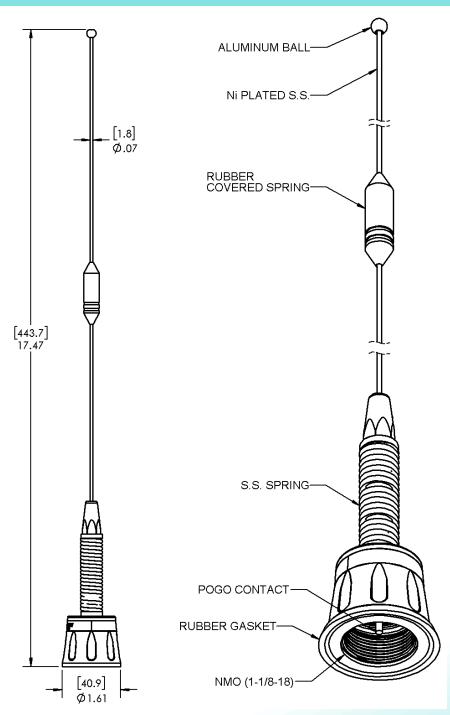

All dimensions are in mm / inches

Issue: 2036





Description: NMO, Tri Band 150-174/430-


520/750-870MHz

PART NUMBER: NMO150/450/758SF

CHARTS

VSWR vs Frequency NMO150/450/758SF Measured with 17ft cable on Ø52" GP

Measured at Pulse, USA - Sep 04, 2020

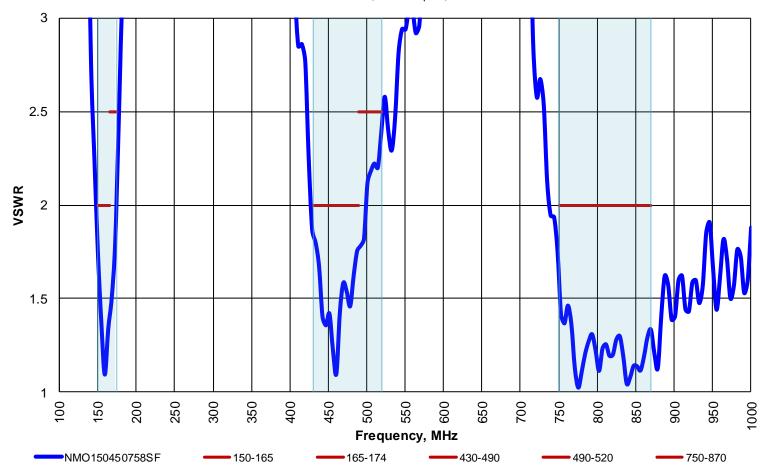






Description: NMO, Tri Band 150-174/430-520/750-870MHz

PART NUMBER: NMO150/450/758SF

CHARTS


Peak Gain vs Frequency NMO150/450/758SF

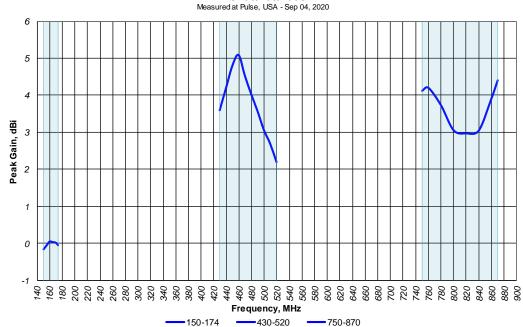

Measured with 6" (152mm) cable

Efficiency vs Frequency NMO150/450/758SF

Measured at Pulse, USA - Sep 04, 2020

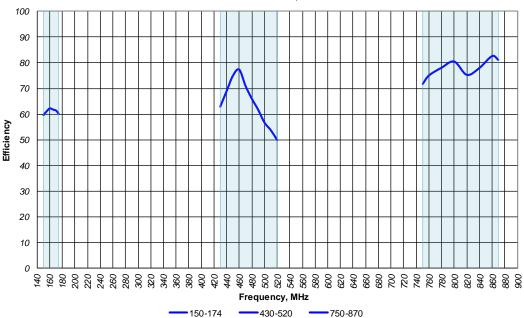

Issue: 2036

Measured with 6"

(152mm) cable

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION








Description: NMO, Tri Band 150-174/430-520/750-870MHz

PART NUMBER: NMO150/450/758SF

CHARTS XY plane 0 330 160 300 Avg (dBi) = -1.29Peak (dBi) = -1.24 -20 Avg -3 (deg) = 360160MHz 270 90 -85 Measured with 6" (152mm) cable 120 240 210 **-**160 Phi Angle (°) 180 ZX plane 0 330 30 160 300

160MHz

Measured with 6" (152mm) cable

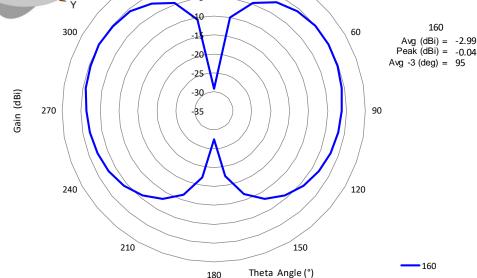

Issue: 2036

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION







Description: NMO, Tri Band 150-174/430-520/750-870MHz

PART NUMBER: NMO150/450/758SF

CHARTS XY plane 0 330 460 300 Avg (dBi) = -6.09Peak (dBi) = -5.13-20 Avg -3 (deg) = 360Gain (dBi) 460MHz 270 90 Measured with 6" -85 (152mm) cable 120 240 150 210 460 Phi Angle (°) 180 ZX plane 0 330 30 460 300 Avg (dBi) = -1.67Peak (dBi) = 4.23-20 Avg -3 (deg) = 37460MHz Measured with 6" 270 90 (152mm) cable 240 120 210 150 460

Issue: 2036

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



180

Theta Angle (°)





Description: NMO, Tri Band 150-174/430-520/750-870MHz

PART NUMBER: NMO150/450/758SF

CHARTS XY plane 0 330 800 300 Avg (dBi) = 2.49 Peak (dBi) = 2.80 -20 Avg - 3 (deg) = 360800MHz 270 90 -85 Measured with 6" (152mm) cable 240 150 800 Phi Angle (°) 180 ZX plane 0 330 30 800 300 Avg (dBi) = -1.58Peak (dBi) = 3.41Avg -3 (deg) = 37 800MHz Measured with 6" 270 90 -85 (152mm) cable 240 120 210 150 800 Theta Angle (°)

Issue: 2036

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



180



TECHNICAL DATA SHEET

Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758SF

Series: Tri Band Whip

PACKAGING

Pack each Antenna and instruction in PE bag.

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)