

Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL80R2455A

Features:

Compact size: 1.6x0.8x0.6mm

RoHS compliant

Applications:

• WLAN, 802.11a/b/g/n

ISM Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	VALUE		
Pass Band	Low Band	High Band	
	2400~2500MHz	4900~6000MHz	
Insertion loss	0.7dB (Max) at 25°C	0.8dB (Max) at 25°C	
Return-Loss	10.0dB(Min) 12.0dB(Min)		
Attenuation		28dB(Min).@860~960MHz	
		23dB(Min).@1545~1605MHz	
	20dB(Min). @4.8~5GHz 20dB(Min). @7.2~7.5GHz	23dB(Min).@1710~1990GHz	
		28dB(Min).@2.17GHz	
		8dB(Min).@8.1GHz	
		15dB(Min).@8.82~9.8GHz	
		27dB(Min).@9.8~11.8GHz	
Isolation	Middle Band to High Band: 20dB (Min). @4.9~5.95GHz		
Operating Temperature	-40 ~ 85°C		
Dimension	1.6 x 0.8 x0.6mm		

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998




Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL80R2455A

MECHANICAL DIMENSION

Outline

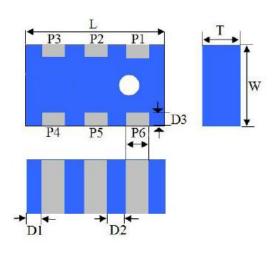


Termination

Terminal name	Function		
P1	Low band		
P2	GND		
P3	High band		
P4	GND		
P5	Common		
P6	GND		

Mechanical

	Dimension
L (mm)	1.60±0.15
W (mm)	0.80±0.15
T (mm)	0.60±0.15
P1 (mm)	0.20±0.15
P2 (mm)	0.20±0.15
P3 (mm)	0.20±0.15
P4 (mm)	0.20±0.15
P5 (mm)	0.20±0.15
P6 (mm)	0.20±0.15
D1 (mm)	0.20±0.15
D2 (mm)	0.30±0.10
D3 (mm)	0.15±0.10

Reference design of EVB

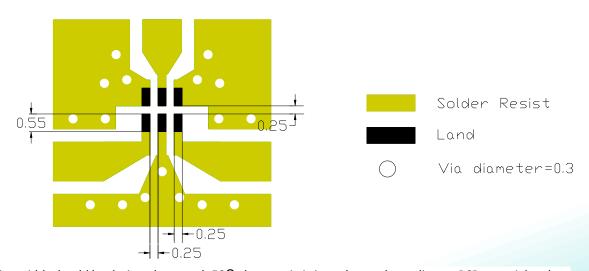

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL80R2455A

ELECTRICAL PERFORMANCES



- Measured on Agilent E5071C
 Network Analyzer
- Port 1, 2 and 3 in Network Analyzer is connected to device as below
- ◆ Port 1 : High band port
- ◆ Port 2 : Common port
- ◆ Port 3 : Low band port
- ◆S22 : Return loss for low and high band
- S32 : Insertion loss and attenuation for low band
- S12: Insertion loss and attenuation for high band

Frequency Characteristics



Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL80R2455A

RF\	/ISI	ON	HIS.	TORY	
		\mathbf{v}	1110		

Revision Date Description Oct. 06, 2020 Version 1 - New issue

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)