





#### NOTES:

- ROHS COMPLIANT
- HEADER: PHENOLIC WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
  - Α. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - В. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
  - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e 23Z467SMFNL BECOMES 23Z467SMFNLT).








FINAL OUTLINE

@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SIN,10D,1:2,SM,TU	23Z467SMFNL-11	PS-2755.001-A	1 OF 3	23Z467SMFNL	Α







#### ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED


PARAMETER	SPECIFICATIONS			
OPERATING TEMPERATURE	0°C - 70 °C			
POLARITY	PER SCHEMATIC			
TURNS RATIO (F=10 KHZ)	(1-3) : $(16-14)$ = 1CT : 1CT ±2% (6-8) : $(11-9)$ = 1CT : 2CT ±2% (16-15) : $(15-14)$ = 1:1±2% WITH PINS $(1-3)$ SHORTED (11-10) : $(10-9)$ = 1:1± 2% WITH PINS $(6-8)$ SHORTED			
COUPLING CAPACITANCE	(1-3)-(16-14) = 8.0  pF MAX. (6-8)-(11-9) = 12.0  pF MAX. (V=20mV, F=100  KHz)			
LEAKAGE INDUCTANCE	(1-3)-(16-14) = 0.3 uH MAX. (6-8)-(11-9) = 0.20 uH MAX. (V=20mV, F=100  KHz)			
LP ( V=20mV, F=10 KHz)	(1-3) = 98 uH MIN. (11-9) = 70 uH MIN. 15 - (16-14) = 42 uH MIN.			
DCR	(1-3), $(16-14) = 0.6$ OHM MAX. (6-8), $(11-9) = 0.6$ OHM MAX. (15-16), $(15-14) = 0.3$ OHM MAX. (10-11), $(10-9) = 0.3$ OHM MAX.			
BETWEEN CHANNEL ISOLATION	1500 VAC FOR 60 SECONDS			


### @ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SIN,10D,1:2,SM,TU	23Z467SMFNL-11	PS-2755.001-A	2 OF 3	23Z467SMFNL	Α







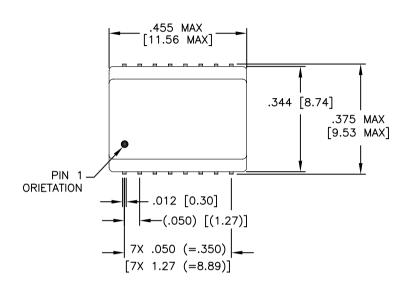

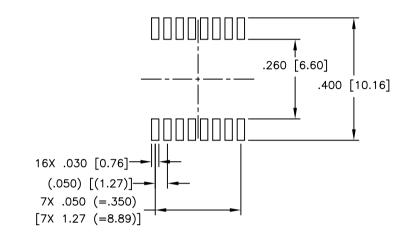

### SUGGESTED LAND PATTERN



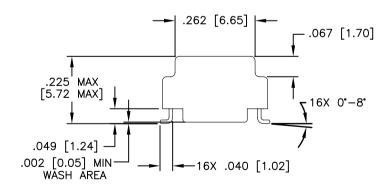

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.  $.XX = \pm .01$ [±0.25]  $.XXX = \pm .005$   $[\pm 0.13]$ 

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SIN,10D,1:2,SM,TU	23Z467SMFNL-11	PS-2755.001-A	3 OF 3	23Z467SMFNL	A

## 单击下面可查看定价,库存,交付和生命周期等信息

# >>Pulse(普思)