

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : GLASS FILLED NYLON UL94V-0 COLOR-BLACK.
2. INSERT MATERIAL : GLASS FILLED PBT UL94V-0 COLOR-BLACK.
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
4. PLATING : CONTACT AREA-SELECTIVE GOLD PLATING.  
TAILS-TIN 150u" MIN OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.


**ENVIRONMENTAL:**

1. STORAGE TEMPERATURE : -40°C TO +85°C.
2. OPERATION TEMPERATURE: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO  
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER	GOLD PLATING
E59J8-15CU62-L	6u"
E59J8-15CU63-L	15u"
E59J8-15CU64-L	30u"

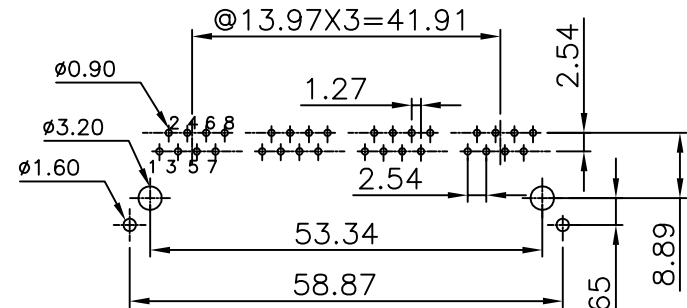

PC Board Layout t=1.60mm  
Component Side Shown Tolerance±0.05mm

DETACHED LISTS	MM (INCH)	RoHS Compliant				
	TOLERANCES EXCEPT AS NOTED		TITLE			
	MM	±	20.57 GANG JACK		SIZE	REV
	.0 ± 0.2	±			A3	0
.00 ± 0.15	±	DFTO Cathy		DRAWING NO. CE593182-LB		
.000 ± 0.075	±	DATE 2006/09/19		/PART NO. SEE TABLE		
ANGLES ± 0.5		SCALE : 1:1		DO NOT SCALE DRAWING		
 THIRD ANGLE PROJECTION		SHEET 1		OF 1		

8

7

6

5

4

3

2

1

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)