

Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715



Features:

- Frequency: 2.4-2.5/4.9-6GHz
- Gain: 3.7/5.5dBi
- Size: 11 x 7 x 16 mm
- SMT compatible
- Packing: Tape&Reel
- RoHS compliant

Applications:

- WiFi, ISM 2.4/5GHz
- Bluetooth, Zigbee, BLE
- DSRC 5.925GHz
- IoT and M2M devices
- Portable Electronics
- Security, Transportation

All dimensions are in mm / inches

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Tel: 1-360-944-7551 Downloaded From Oneyac.com

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

ELECTRICAL SPECIFICATIONS

Frequency	2.4-2.5GHz, 4.9-6GHz
Nominal Impedance	50Ω
VSWR	2:1
Peak Gain (2.4-2.5GHz)	3.7dBi +/- 1 dB
Peak Gain (4.9-6GHz)	5.5dBi+/- 1 dB
Efficiency	74%
Power withstanding	5W
Radiation Pattern	Omni

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



2



Description: 2.4/5GHz Dualband WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3715

MECHANICAL SPECIFICATIONS		
Material	SUS304	
Thickness	0.5 mm	
Finish	Ni plating 1-3 um	
Weight	0.56 g	
Size(L X W X H)	11(0.43)X 7(0.28) X 16(0.63) mm(inch)	
Fixing system	SMT	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40/+85 °C

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

MECHANICAL DRAWING

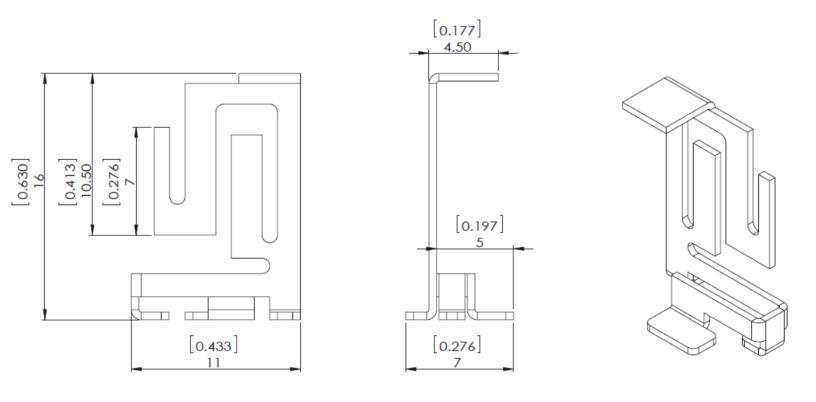

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4




Description: 2.4/5GHz Dualband WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3715

OTHER SPECIFICATIONS

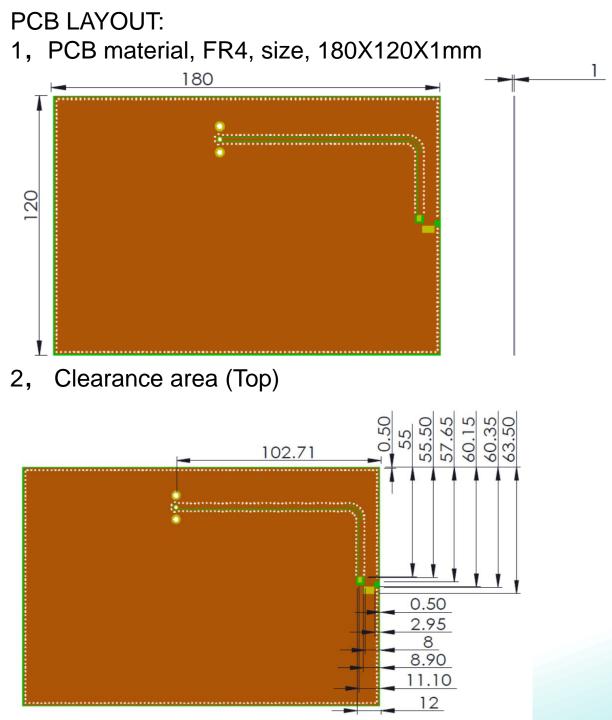

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5



Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna


PART NUMBER: W3715

OTHER SPECIFICATIONS

3, Clearance area (Bottom)

102.71	
•••••••••••••••••••••••••••••••••••••••	***************************************

4, PCB Features

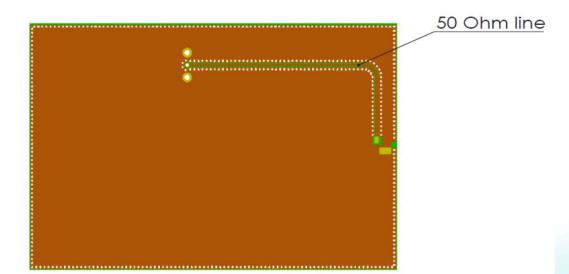

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6




Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

OTHER SPECIFICATIONS

3, Antenna on test PCB

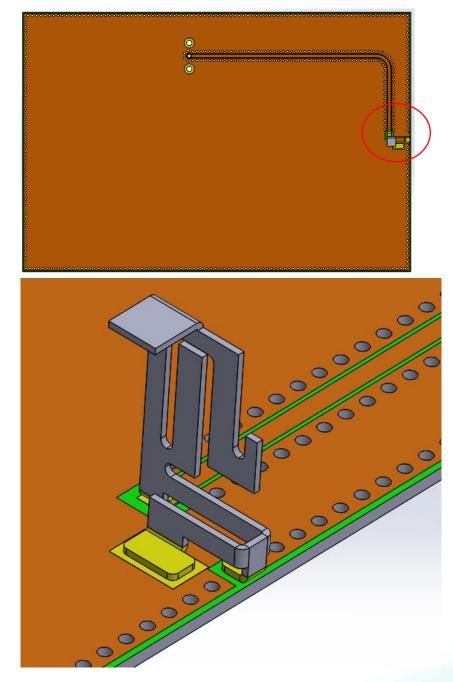

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Series: Embedded Antenna

TECHNICAL DATA SHEET

Description: 2.4/5GHz Dualband WiFi SMT Antenna

Antei

PART NUMBER: W3715

OTHER SPECIFICATIONS

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

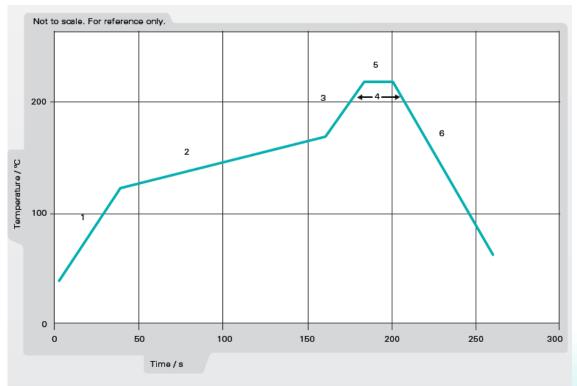


Figure 1. Minimum temperature profile recommendation for reflow soldering process

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 2.4/5GHz Dualband WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3715

OTHER SPECIFICATIONS

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

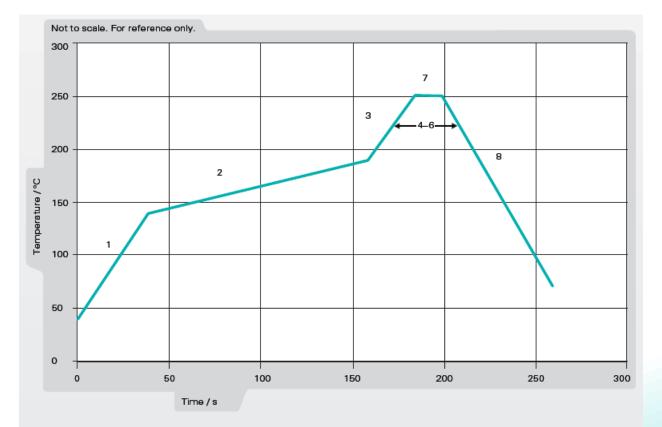


Figure 2. Maximum temperature profile recommendation for reflow soldering process

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




9



Description: 2.4/5GHz Dualband WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3715

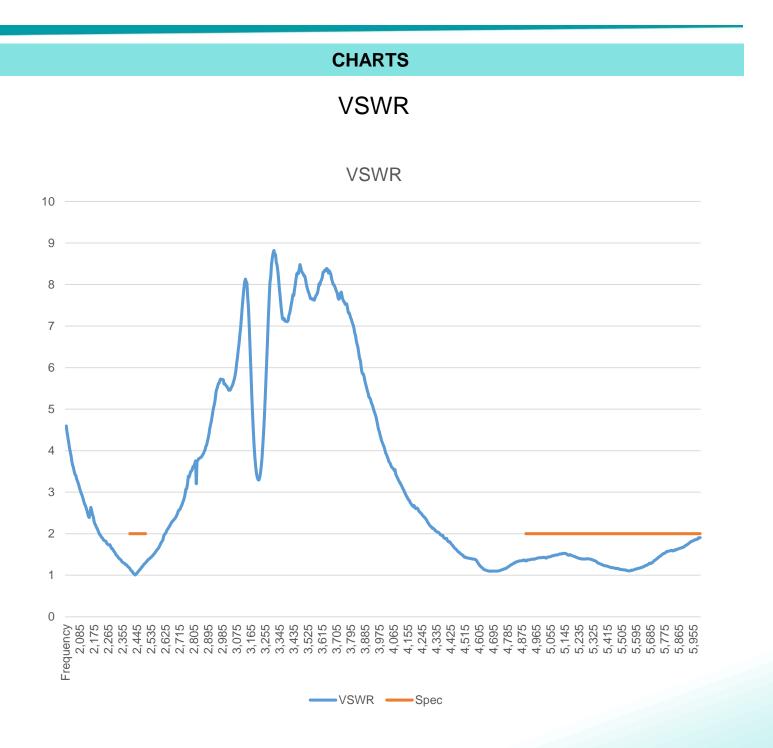

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

CHARTS

Efficiency(%)

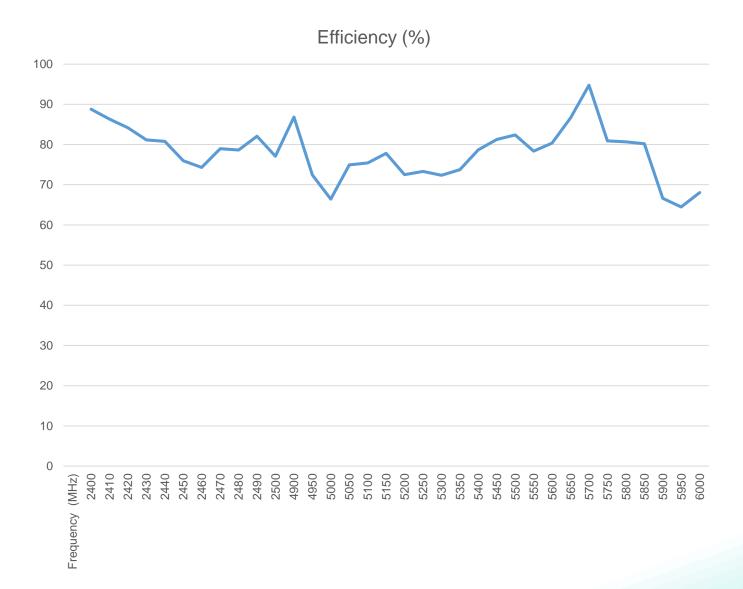

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION





Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

CHARTS

Peak Gain (dBi)



Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

CHARTS

Free Space Radiation Pattern

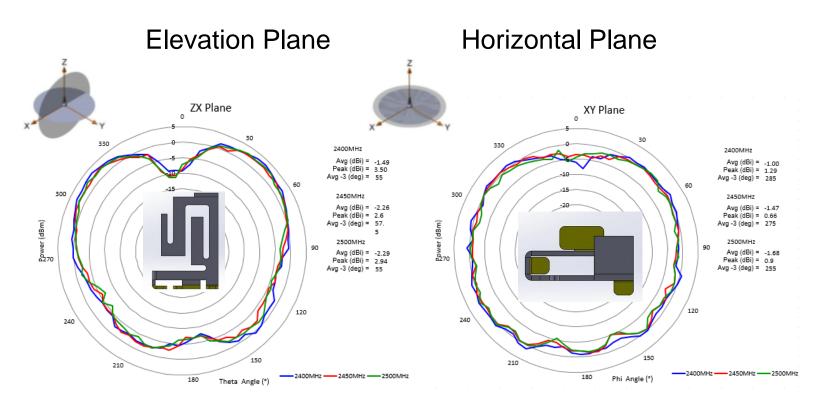

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

CHARTS

Free Space Radiation Pattern

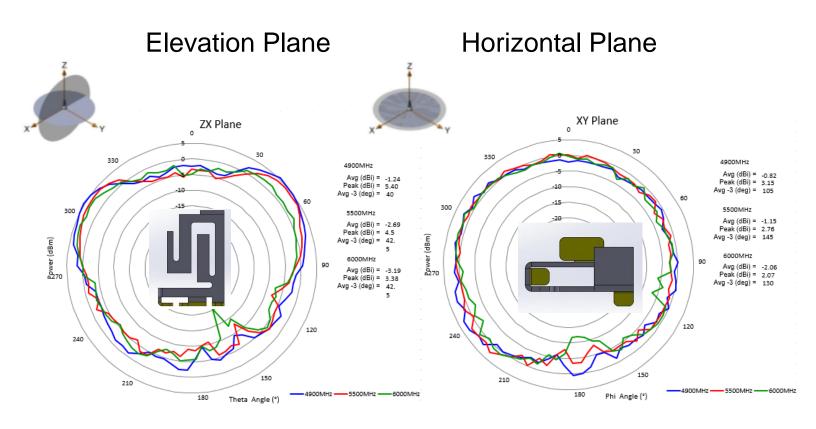

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Series: Embedded Antenna

Description: 2.4/5GHz Dualband WiFi SMT Antenna

PART NUMBER: W3715

PACKAGING

Tape and Reel packing: 200 PCS/ Tape and Reel 400PCS/ Carton box

Tape Width : 32mm Tape Material : Polystyrene





Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)