
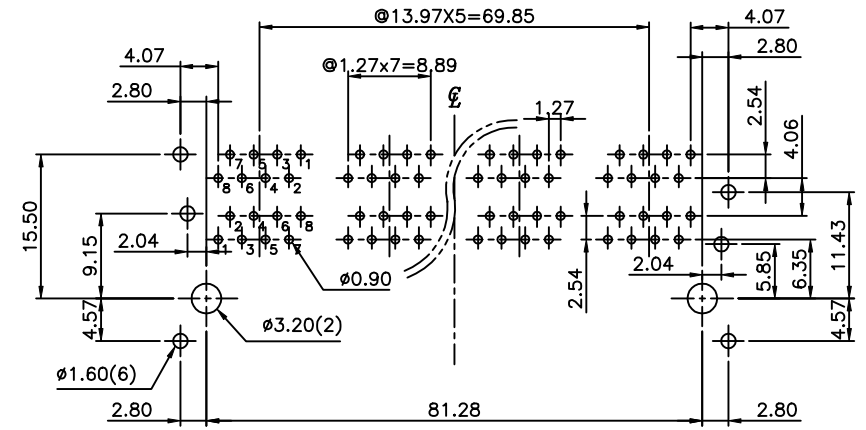
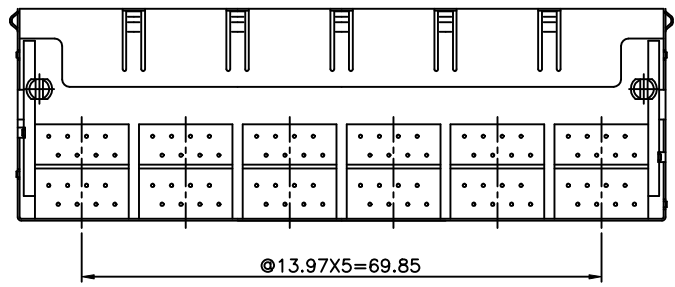
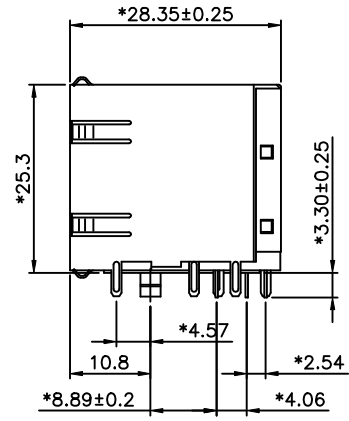


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

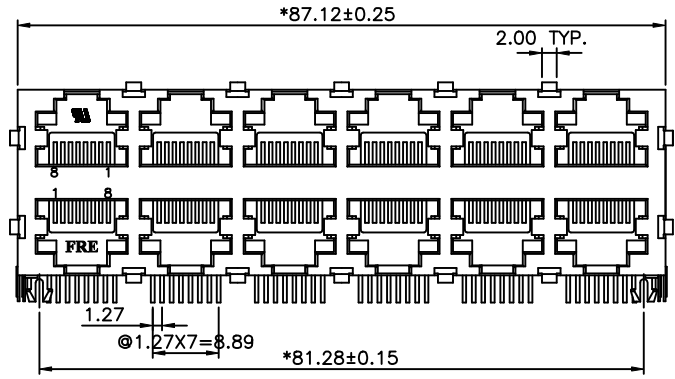

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERATURE 255°C~265°C (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER: E5908-5XE15X-L

Shield Plating: 1- Tin, 7- Nickel, Q- GOLD
Gold Thickness: 1- 3u" 2- 6u" 3-15u", 4-30u" 5-50u"

DETACHED LISTS	MM (INCH)	DFTO JAMY	DATE 7/26/05
	TOLERANCES EXCEPT AS NOTED	CHKD Dmmj	DATE 08/07/06
	MM	MFO	DATE
	.0 ±0.2	APPLV LUS000	DATE 08/07/06
	.00 ±0.15	MATERIAL :	
.000 ±0.075	ANGLES ± 0.5		
THIRD ANGLE PROJECTION	QTY :		
	FINISH :		
	SCALE : 1.5 : 1		

FULL RISE ELECTRONIC CO., LTD			
TITLE RJ45 STACKED GANGED JACK, 2X6			
DRAWING NO. GE593267-LA		SIZE A3	REV 0
/PART NO. SEE NOTE		DO NOT SCALE DRAWING	
SHEET		OF	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)