


A1RFRD10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD PART NO.	VICKY 4/12/00	
△		Modify Dimension	Garvey 7/10/00	
△		ADD PANEL STOP	Garvey 1/11/01	
△		ADD NEW P\N	XLF 5/13/04*	
△		ADD NEW P\N	CXO 13/08/04*	

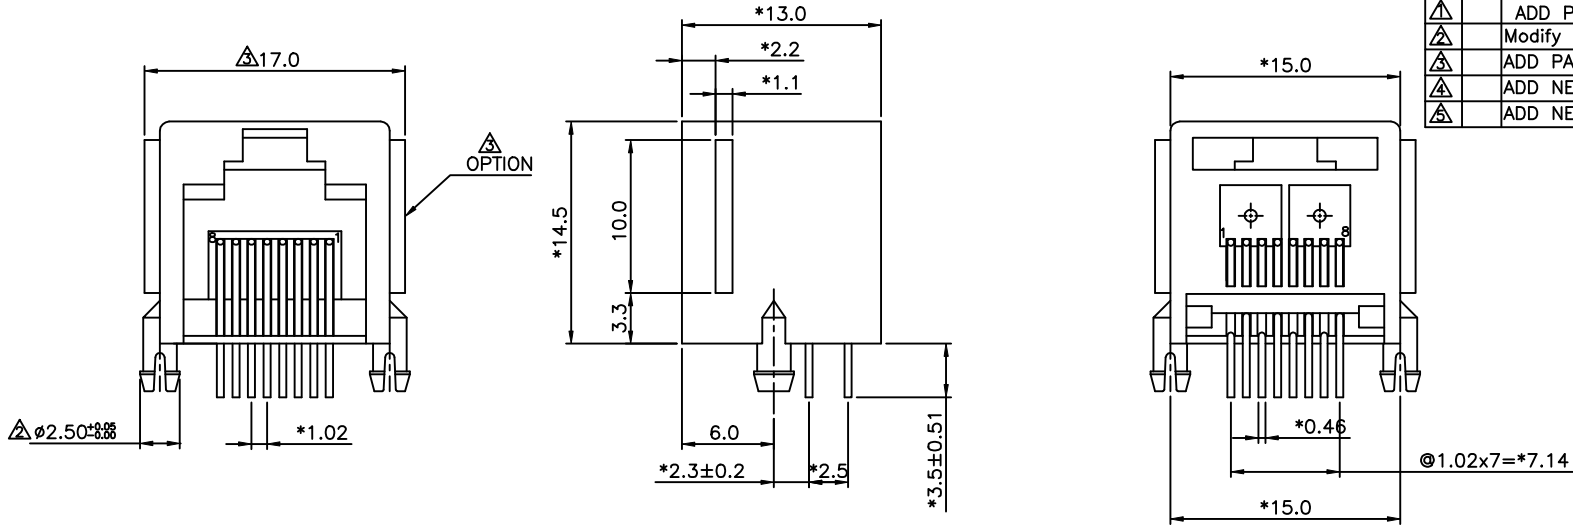

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.


MECHANICAL:

- HOUSING MATERIAL : PBT+15%GF UL94V-0 OR ZYTEL FR50 NC010 UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46$ mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

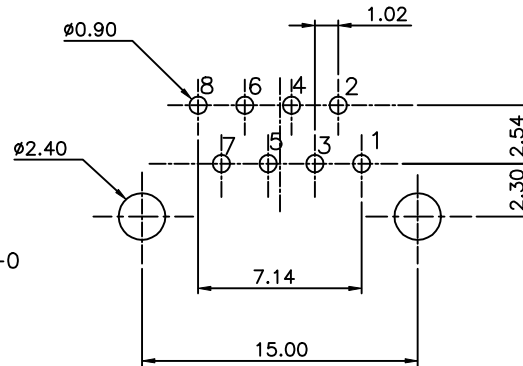

PC Board Layout
Component Side Shown

△ PART NUMBER: E558X-60LXXX

NO. OF CONTACT:	1- 3u" 2- 6u"
2- 2C	3-15u" 4-30u"
4- 4C	5-50u" 6-Pd 20u"
6- 6C	F-Gddflash △
8- 8C	1-WITH PANEL STOP △
	2-W/O PANEL STOP
0- BK	
1- GY	
4- FR50 Black	
K- FR50 Gray	
△ U- FR52 BK	

TOLERANCES EXCEPT AS NOTED MM .0 ± 0.2 ± .00 ± 0.15 ± .000 ± 0.075 ±	DFTO Lien DATE 9/09/99* CHKD Among DATE 2004/8/18 MFO DATE APPVL czh DATE 2004/8/18	FULL RISE ELECTRONIC CO., LTD	
	MATERIAL : QTY : FINISH : SCALE : 3 : 1	TITLE MINI L/P PCB JACK 8P	
	ANGLES ± 0.5 THIRD ANGLE PROJECTION	DRAWING NO. GE553A12 /PART NO. SEE NOTE	SIZE A3 REV 13/08/04* 5
	DO NOT SCALE DRAWING	SHEET OF	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)