
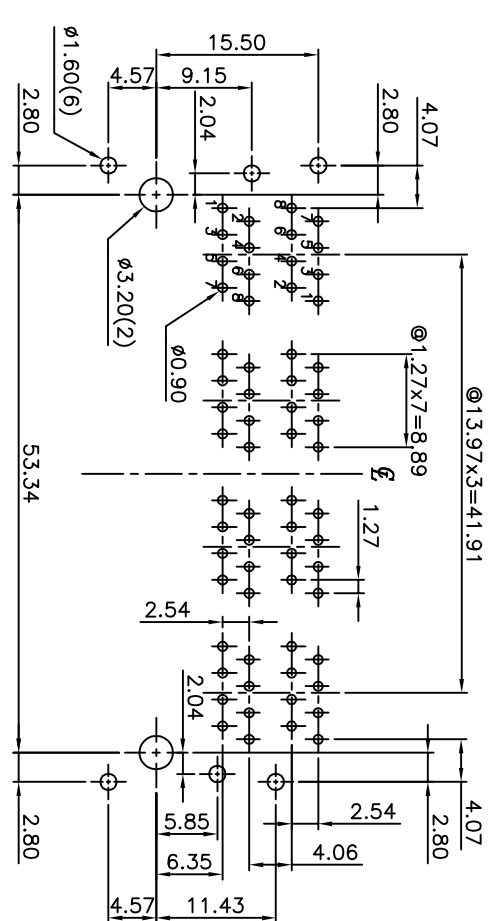
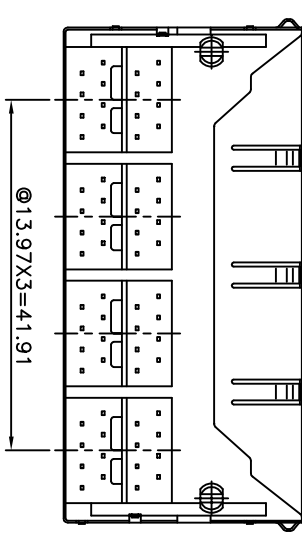
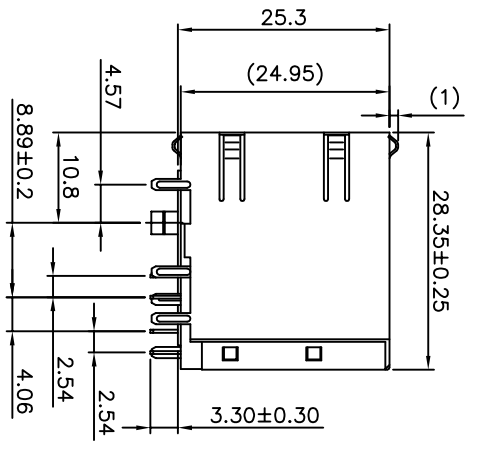


REVISION RECORD	
REV	DESCRIPTION
	DFT

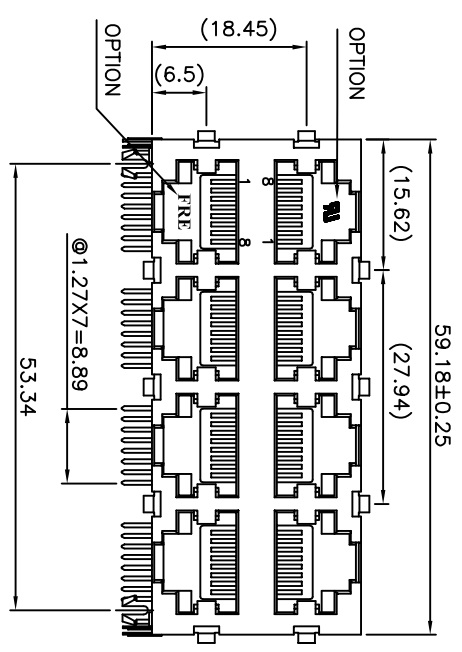

PC BOARD LAYOUT T=1.60mm
COMPONENT SIDE SHOWN
TOLERANCES±0.05mm

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60HZ, 1MIN.

MECHANICAL:

- HOUSING & IIN'S MATERIAL : PBT FIBER GLASS FILLED . UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE, T=0.35mm.
- SHIELD MATERIAL : COPPER ALLOY, T=0.25mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C TO +85°C.
 - OPERATION TEMPERATURE: -40°C TO +85°C.
 - WAVE SOLDERING TEMPERATURE: 235°C TO 245°C (3~5 SECONDS).
 - RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

DETACHED LISTS	
MM	(INCH)
TOLERANCES EXCEPT AS NOTED	
MM	±
0 ± 0.25	±
.00 ± 0.20	±
.000 ± 0.10	±
ANGLES ± 1°	
THIRD ANGLE PROJECTION	
RoHS Compliant	
Pulse Electronics	
STAMPED PIN III	
TITLE	STACKED GANGED JACK, 2X4
DFTO :	KURT
DATE :	05/07/2012
SCALE :	3:2
DRAWING NO.	CE5908-SVC14X-L
/PART NO.	E5908-SVC145-L
DO NOT SCALE DRAWING	
SHEET	1 OF 1
SIZE	A3
REV	0

PART NO.	SHIELD PLATING	COLOR	AU PLATING	FRE & UL LOGO
E5908-SVC145-L	NICKEL	BLACK	50u"	W/

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)