



Series: MIRANT
PART NUMBER: W6100



Features:

- End fed stealth blade antenna with coax cable
- Bands 698-960, 1710-2170, 2300-2700MHz
- Size 110 x 26 x 2mm
- Connector Fakra SMBA Code D

Applications:

- Automotive LTE radio systems
- Embedded antenna into the mechanics
- Mirrors, bumpers, inside dash etc.

Issue: 1807

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998 1

TECHNICAL DATA SHEET

57 %



Description: LTE 698-2700MHz Stealth Blade Antenna

Series: MIRANT

PART NUMBER: W6100

ELECTRICAL SPECIFICATIONS

Frequency	698-960 MHz
	1710-2170 MHz
	2300-2700 MHz
	Nominal Impedance 50 Ω
VSWR 698-960 MHz	3:1
VSWR 1710-2700 MHz	2.5:1
Peak Gain, Avg. 698-960 MHz	1.8 dBi
Peak Gain, Avg. 1710-2170 MHz	4 dBi
Peak Gain, Avg. 2300-2700 MHz	4.5 dBi
Efficiency, Avg. 698-960 MHz	50 %
Efficiency, Avg. 1710-2170 MHz	52 %

Efficiency, Avg. 2300-2700 MHz





Series: MIRANT

PART NUMBER: W6100

MECHANICAL SPECIFICATIONS

Radiator material PCB

Radiator Size X,Y 110x 26 mm

Radiator Thickness 2 mm

Color Black

Fixing system Adhesive tape, 3MVHB 4949

Cable type RG 316

Cable length 550mm

Connector Fakra Code D

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40~ +85° C

Mechanical Vibration Random vibration input of 60 min/axis,

all three perpendicular axis.

Transportation frequency 5-500 Hz using Fig 514.6C-I and Table 514.6-II of MIL STD 810G section 514.6,

Shock Impact Per EIA-TIA-329-B1 spec

Storage Temperature -40° to +85° C

Humidity +30°C @ 93% RH








Series: MIRANT

PART NUMBER: W6100

MECHANICAL Drawing

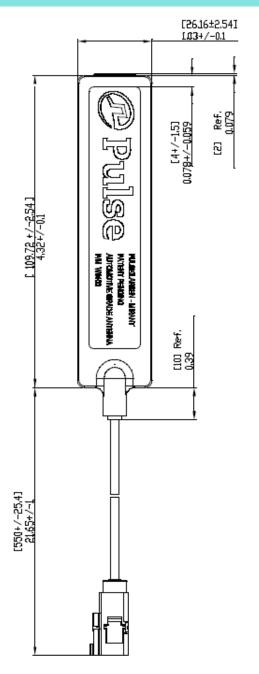

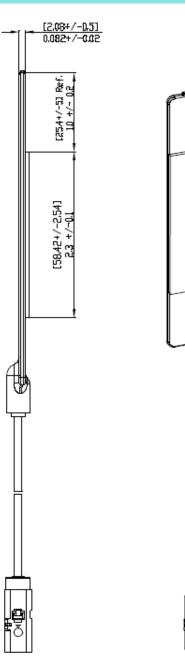

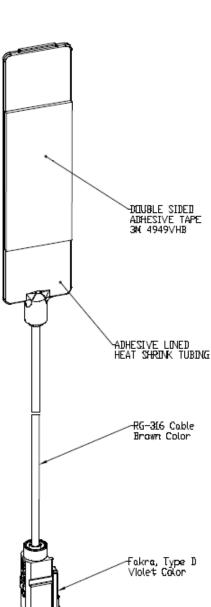

All dimensions are in mm / inches

Issue: 1807

ROHS






Series: MIRANT


PART NUMBER: W6100

CHARTS

VSWR vs Frequency W6100 Tested on K-MFG Mirror

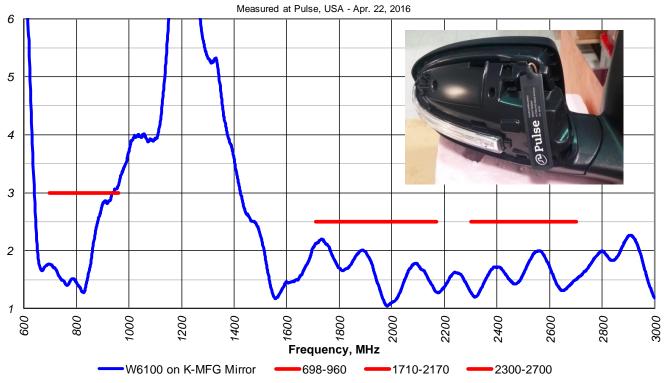



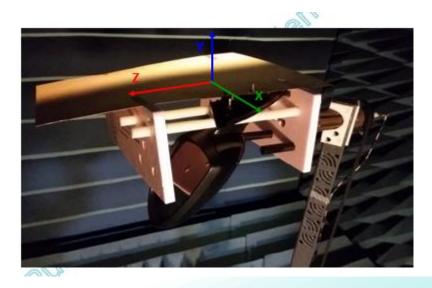

Issue: 1807

RÓHS






Series: MIRANT
PART NUMBER: W6100

CHARTS

Peak Gain vs Frequency W6100 Tested on K-MFG Mirror

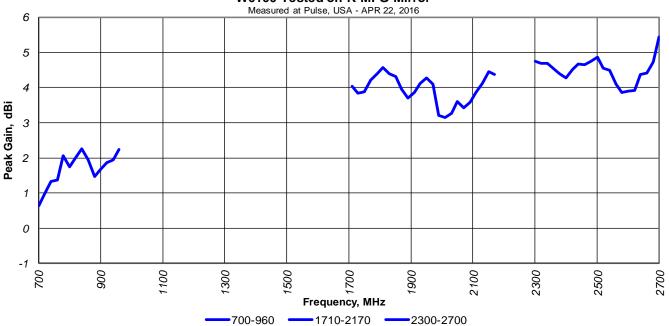

Efficiency vs Frequency W6100 Tested on K-MFG Mirror

Measured at Pulse, USA - APR 22, 2016 100 90 80 70 Efficiency (%) 60 50 40 30 20 10 0 300 2300 200 Frequency, MHz **-**1710-2170 2300-2700 700-960

Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION










Series: MIRANT

PART NUMBER: W6100

CHARTS

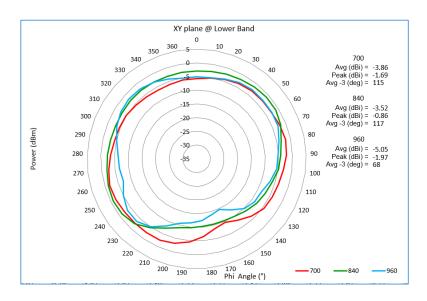

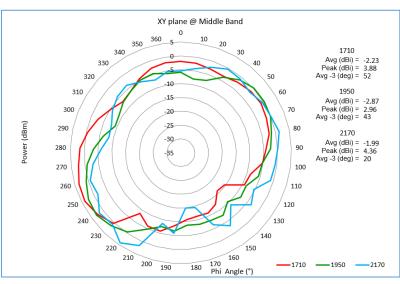

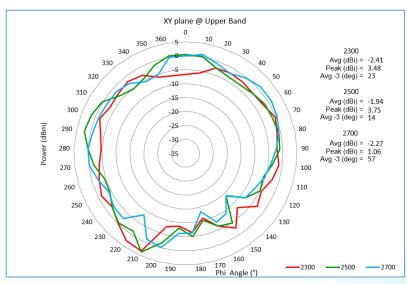








Series: MIRANT

PART NUMBER: W6100

CHARTS

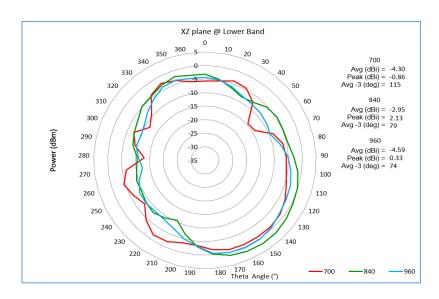

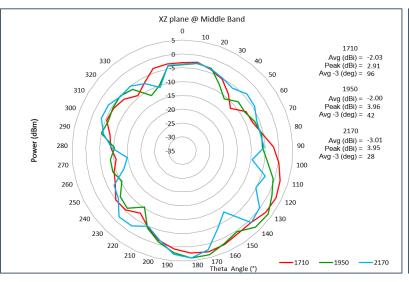

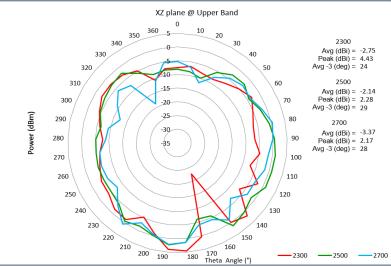








Series: MIRANT

PART NUMBER: W6100

CHARTS

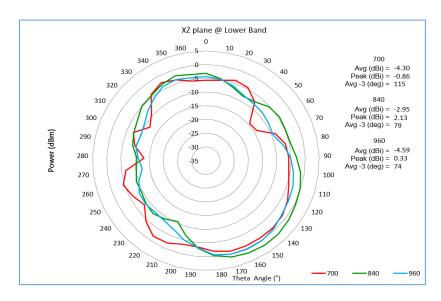

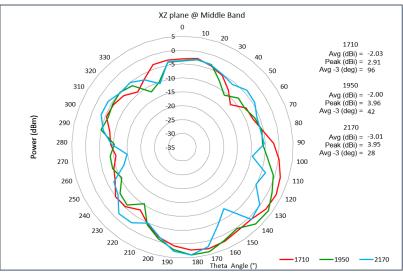

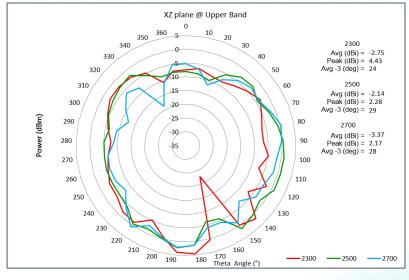





Series: MIRANT

PART NUMBER: W6100

Packaging

1 antennas packed in one plastic bag

100 bags(TBD) of antennas packed in a cardboard box

1 label on each box with qty, part number, date code.

Issue: 1807

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)