








NOTES:

- ROHS COMPLIANT
- STORAGE TEMPERATURE: -50°C TO +125°C
- 3. COMPLIANCE TO J-STD:
 - Α. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - В. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e HXXXXXXNL BECOMES HXXXXXXNLT).

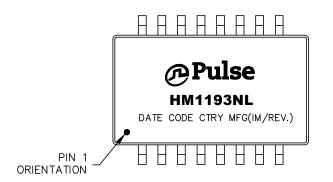





FINAL OUTLINE


@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/27/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,100D,1:1,SM,TU	HM1193NL-X1	PS-2005.001-G	1 OF 3	HM1193NL	A








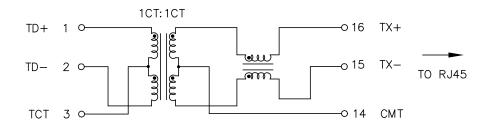

SCHEMATIC



ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED MEETS IEEE 802.3 SPECIFICATION

PARAMETER	SPECIFICATIONS				
QUALIFICATION	AEC-Q200(PENDING)				
OPERATING TEMP	-40°C TO +125°C				
TURNS RATIO	1 : 1 ±2%				
POLARITY	PER SCHEMATIC				
INDUCTANCE (OCL) (MEDIA SIDE, -40°C~+125°C)	350 uh MIN (MEASURED AT 100 KHz, 100 mVRN AND WITH 8 mA DC BIAS				
INCEPTION LOSS	1-100 MHz	125 MHz			
✓ INSERTION LOSS	-1.0 dB MAX	-3.0 dB MAX			
RETURN LOSS	5 MHz	30-80 MHz			
$Z_{OUT} = 100 OHMS$	-18 dB MIN	$-16 + 20LOG_{10}(f/30 \text{ MHz}) \text{ dB MIN}$			
DIFFERENTIAL TO	5-200 MHz				
COMMON MODE REJECTION	$-50 + 17LOG_{10}(f/5 MHz) dB MIN$				
INPUT - OUTPUT ISOLATION	2500	VRMS FOR 60 SECONDS			

NOTE: 1. f IS FREQUENCY IN MHz.

2. "\rightarrow" IS SPECIAL CHARACTERISTIC.


@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/27/18)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,100D,1:1,SM,TU	HM1193NL-X1	PS-2005.001-G	2 OF 3	HM1193NL	A







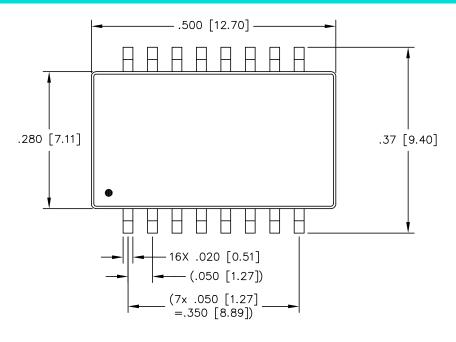

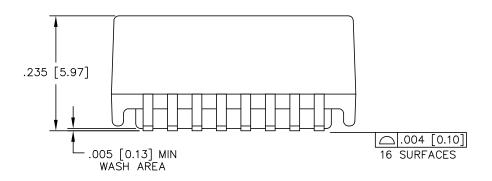

.400 [10.16] .270 [6.86] - 16X .030 [0.76] 7X .050 [1.27] =.350 [8.89]

SUGGESTED LAND PATTERN



DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.

 $.XX = \pm .01$ [±0.25] $.XXX = \pm .005$ [± 0.13]

@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/27/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,100D,1:1,SM,TU	HM1193NL-X1	PS-2005.001-G	3 OF 3	HM1193NL	A

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)