


Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

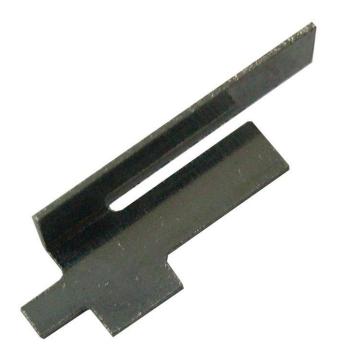

Features:

Frequency: 4.9-6GHz

• Gain: 4.5dBi

Size: 10.5 x 3.2 x 2.4 mm

SMT compatible

Packing: Tape&Reel

· RoHS compliant

Mirror image pair for this antenna is W3713

Applications:

- WiFi, ISM 5GHz
- DSRC 5.925GHz
- Tablets, Notebooks
- IoT and M2M devices
- Portable Electronics
- · Security, Transportation

All dimensions are in mm / inches

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

ELECTRICAL SPECIFICATIONS

Frequency 4.9-6GHz

Nominal Impedance 50Ω

VSWR 2:1

Gain (Radiating element 4.5dBi +/- 1 dB

Radiation Pattern Omni

Polarization: Linear

Power withstanding 5W





Description: 5GHz WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3714

MECHANICAL SPECIFICATIONS					
	Material	Phosphor bronze			
	Thickness	0.2	mm		
	Weight	0.1	g		
	Overall Length	10.5(0.41)	mm(inch)		
	Fixing system	SMT			

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40/+85 ° C






Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

MECHANICAL DRAWING

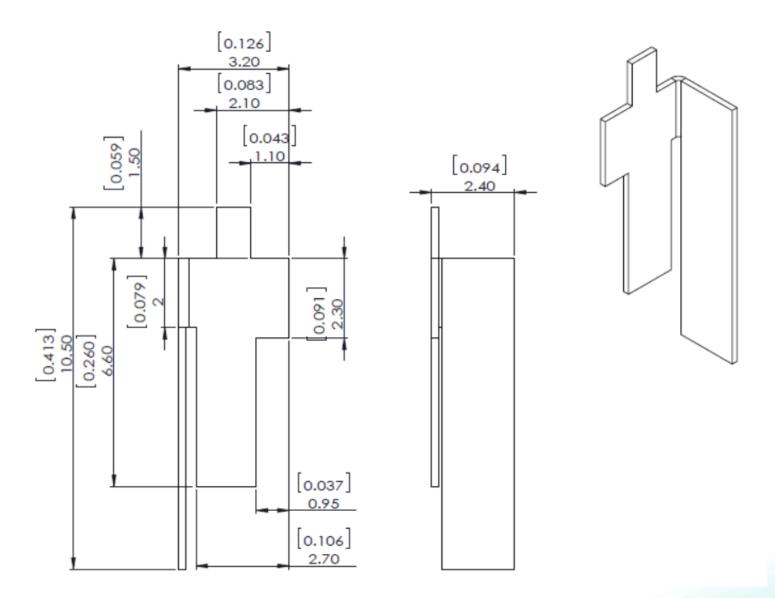



Description: 5GHz WiFi SMT Antenna


PART NUMBER: W3714

Series: Embedded Antenna


OTHER SPECIFICATIONS

PCB LAYOUT:

1, PCB material, FR4, size, 76.2X76.2X0.8mm

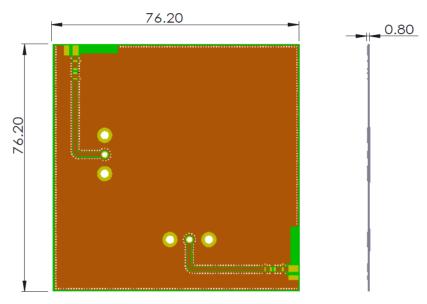

2, Clearance area (Top)

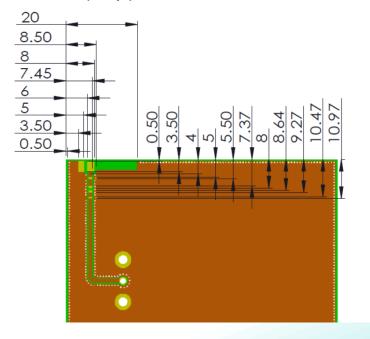

Issue: 1812

ROHS COMPLIANT




Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714


Series: Embedded Antenna

OTHER SPECIFICATIONS

3, Clearance area (Bottom)

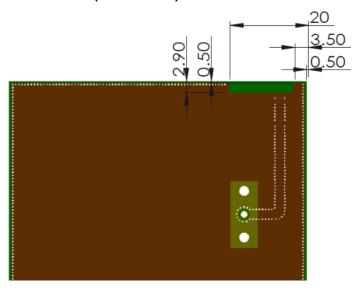

4, PCB Features

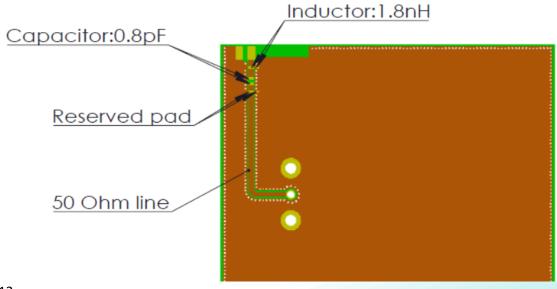

Issue: 1812

ROHS




Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714


Series: Embedded Antenna

OTHER SPECIFICATIONS

5, Antenna on test PCB

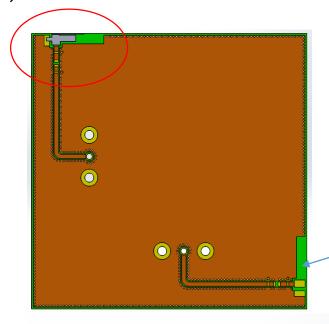

Reserved for W3713

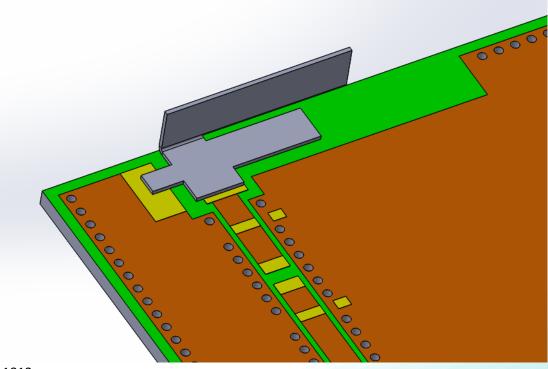

Issue: 1812



Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

OTHER SPECIFICATIONS

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 ℃ for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

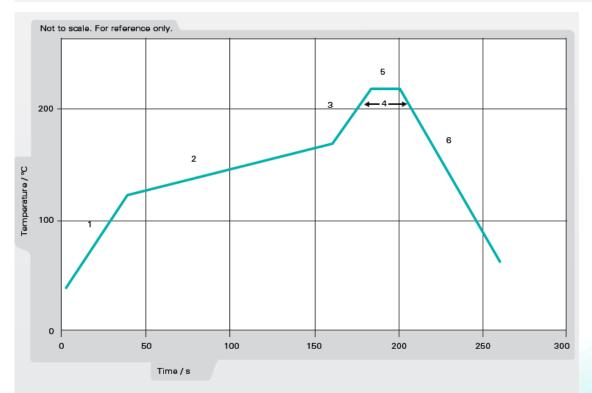


Figure 1. Minimum temperature profile recommendation for reflow soldering process





Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

OTHER SPECIFICATIONS

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

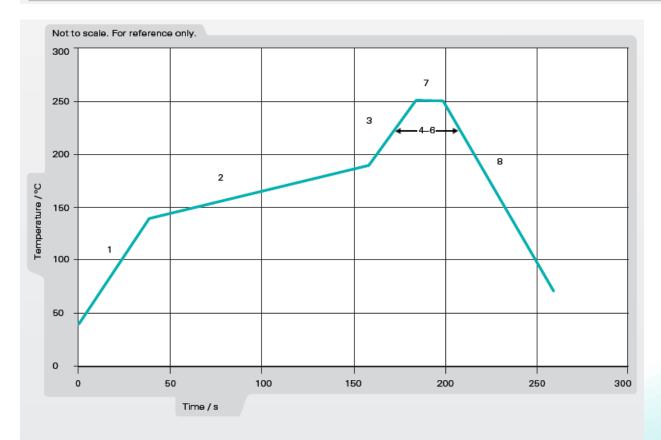


Figure 2. Maximum temperature profile recommendation for reflow soldering process

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

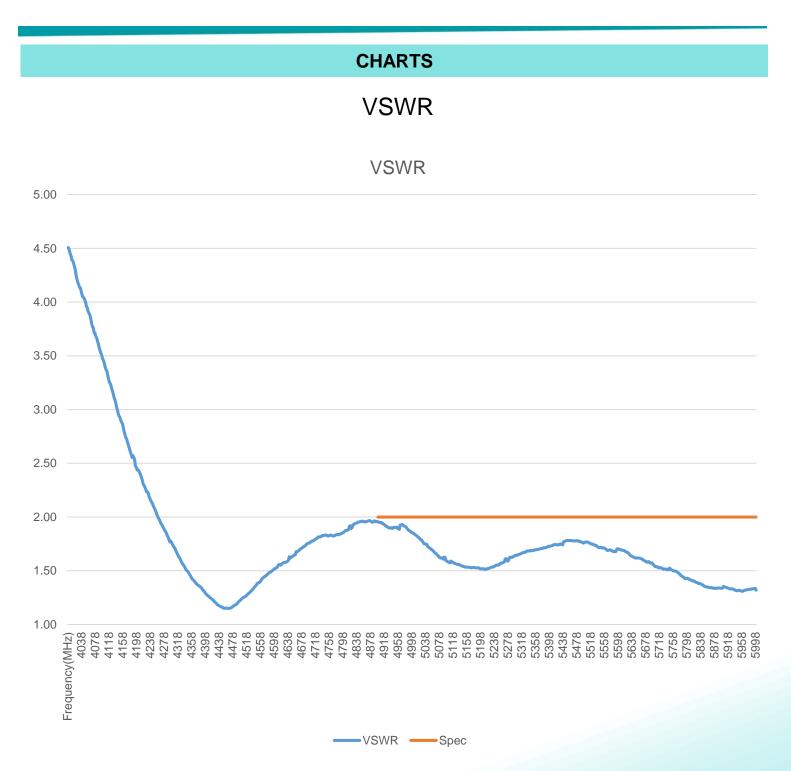








Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

CHARTS

Efficiency(%)

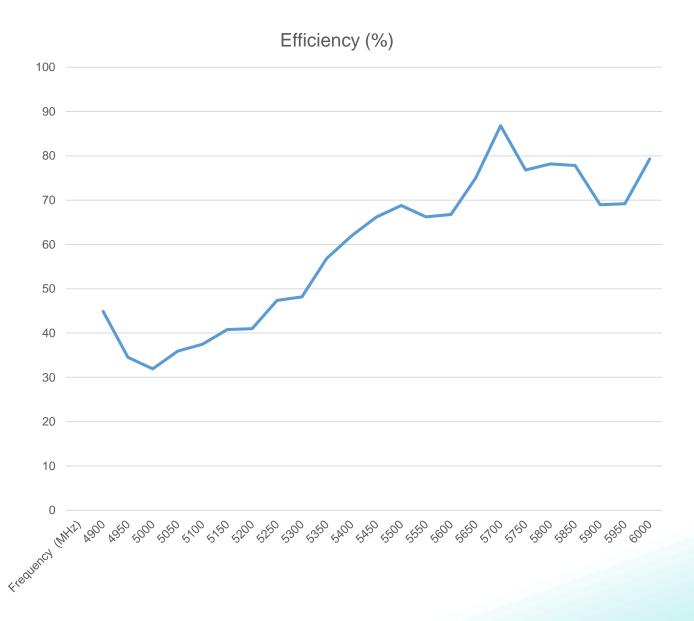





Description: 5GHz WiFi SMT Antenna


PART NUMBER: W3714

Series: Embedded Antenna

CHARTS

Peak Gain (dBi)

Peak Gain (dBi)

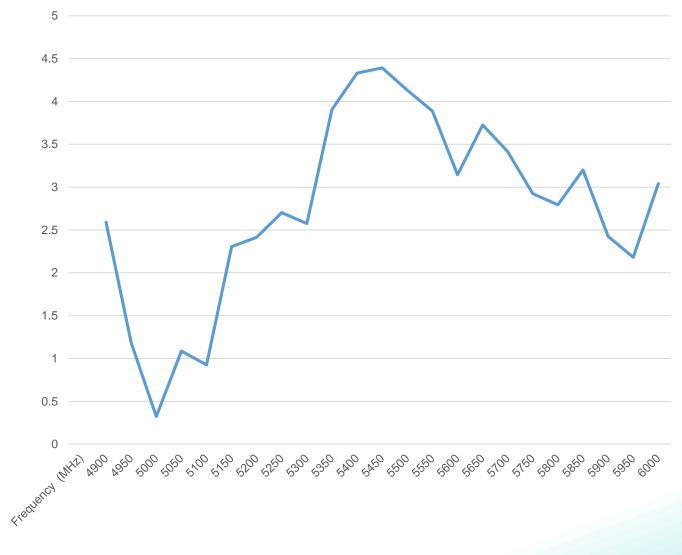






Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

CHARTS

Free Space Radiation Pattern

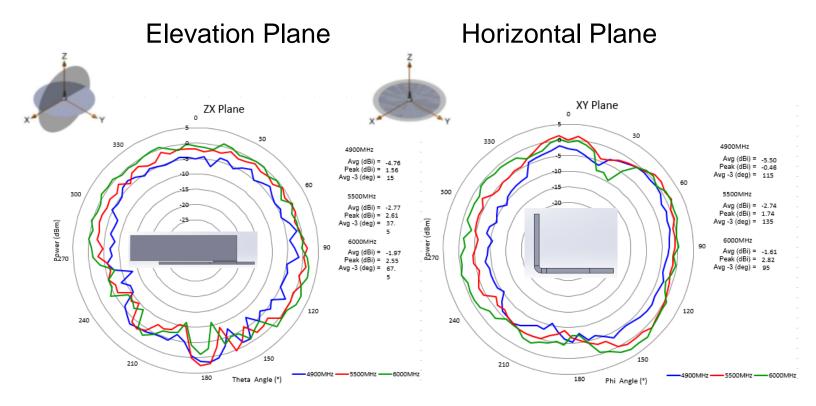



Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3714

Series: Embedded Antenna

PACKAGING

Tape and Reel packing: 3000PCS/Tape and Reel 6000PCS/ Carton box

Tape Width: 24mm

Tape Material: Polystyrene





单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)