



NOTES:

- 1. ROHS COMPLIANT
- 2. HEADER: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
 - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e H5084NL BECOMES H5084NLT).







FINAL OUTLINE


© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/30/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	H5084NL-13	PS-2325.001-C	1 OF 3	H5084NL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA





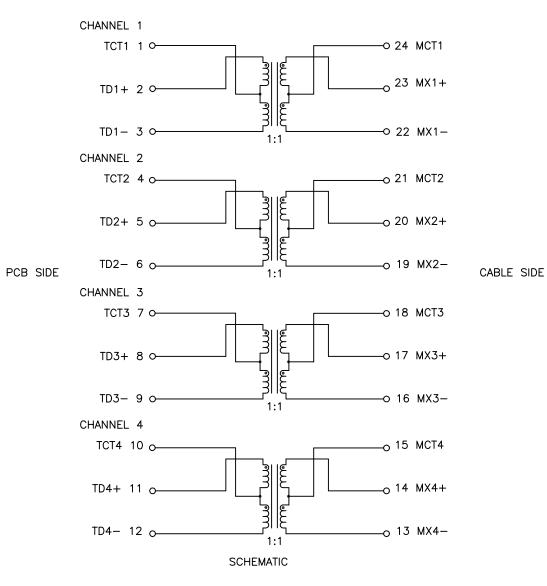

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED

MEETS IEEE 802.3 SPECIFICATION

PARAMETER	S	PECIFICATIONS			
OPERATING TEMP	0°C – 70 °C				
TURNS RATIO		1 : 1 ±2%			
POLARITY	P	ER SCHEMATIC			
	100 KHz	1-125 MHz			
INSERTION LOSS	-1.2 dB MAX	-0.2-0.002*f ^{^1.4} dB MAX			
RETURN LOSS	.1-40 MHz	40-100 MHz			
$(Z \text{ OUT} = 100 \text{ OHM } \pm 15\%)$	-16 dB MIN	—10+20*LOG ₁₀ (f/80 MHz) dB MIN			
INDUCTANCE (OCL) (MEDIA SIDE, 0°C-70°C)	350 uH MIN	(MEASURED AT 100 KHz, 100 mVRMS) AND WITH 8 mA DC BIAS			
	1 MHz	10-100 MHz			
CROSSTALK, ADJACENT CHANNELS	-50 dB MIN	-55+22*LOG ₁₀ (f/10) dB MIN			
COMMON MODE	2 MHz	30-200 MHz			
REJECTION RATIO	-50 dB MIN	-15+20*LOG ₁₀ (f/200) dB MIN			
INPUT - OUTPUT ISOLATION	1500	VRMS MIN @ 60 SECONDS			

NOTE: f IS FREQUENCY IN MHz.

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/30/15)


MDL,SIN,1GD,1:1,SM,TU H5084NL-13 PS-2325.001-C 2 OF 3 H5084NL A						
	PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING		PART NO.	DATASHEET REV.
	MDL,SIN,1GD,1:1,SM,TU	H5084NL-13		2 OF 3	H5084NL	A


E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US)). ASIA(Downloaded Fro	n Oneyac.com	DNE: USA:85
--	----------	----------------	--------------	-------------

IE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768







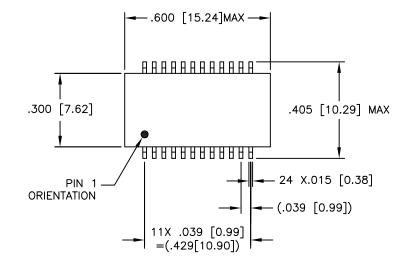

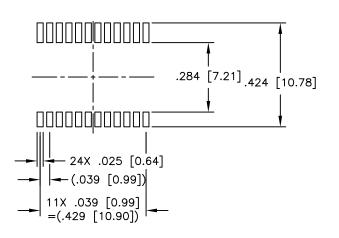

SUGGESTED LAND PATTERN

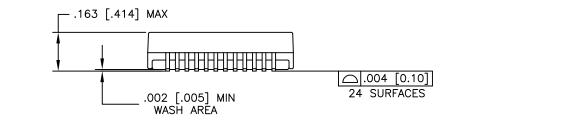



DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.

 $.XX = \pm .02 [\pm 0.5]$ $.XXX = \pm .010 [\pm 0.25]$

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/30/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	H5084NL-13	PS-2325.001-C	3 OF 3	H5084NL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)