


## ABS

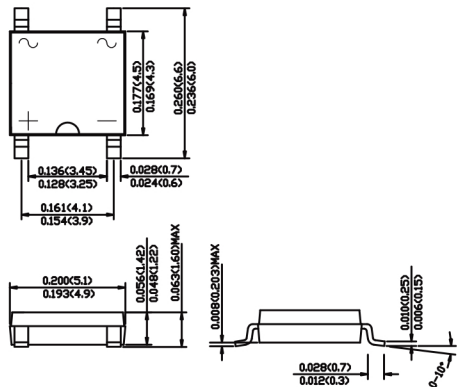

Dimensions in inches and (millimeters)

## FEATURES

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs., (2.3kg) tension
- Small size, simple installation
- High surge current capability
- Glass passivated chip junction

## MECHANICAL DATA

**Case:** Molded plastic body  
**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026  
**Polarity:** Polarity symbols marked on case  
**Mounting Position:** Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load derate current by 20%.

	SYMBOLS	ABS22	ABS24	ABS26	ABS28	ABS210	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	1000	VOLTS
Maximum average forward rectified current On glass-epoxy P.C.B.(Note 1) On aluminum substrate(Note 2)	$I_{F(AV)}$	1.5 2.0					Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50					Amps
Maximum instantaneous forward voltage drop per leg at 0.75A	$V_F$	1.0					Volts
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$	$I_R$	5 100					$\mu A$ $\mu A$
Typical thermal resistance(NOTE 3)	$R(\theta)_{JL}$ $R(\theta)_{JA}$	30 70					$^\circ C/W$
Operating temperature range	$T_J$	-55 to +150					$^\circ C$
storage temperature range	$T_{STG}$	-55 to +150					$^\circ C$

NOTES: 1. On glass epoxy P.C.B. mounted on 0.05x0.05"(1.3x1.3mm) pads  
 2. On aluminum substrate P.C.B. with on area of 0.8"x0.8"(20x20mm) mounted on 0.05X0.05"(1.3X1.3mm) solder pad  
 3. Thermal resistance from junction to ambient and junction to lead mounted on P.C.B. with 0.2X0.2"(5X5mm) copper pads.

FIG.1 TYPICAL FORWARD CHARACTERISTICS

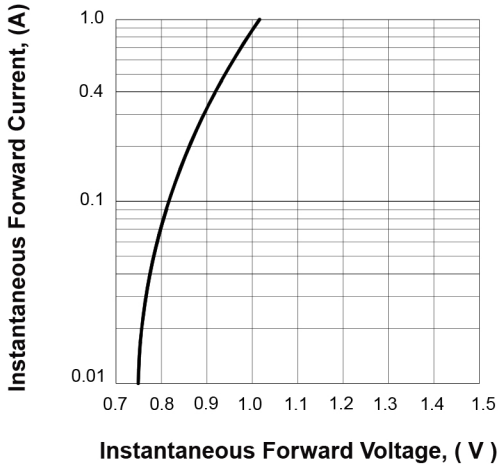


FIG.2 FORWARD DERATING CURVE

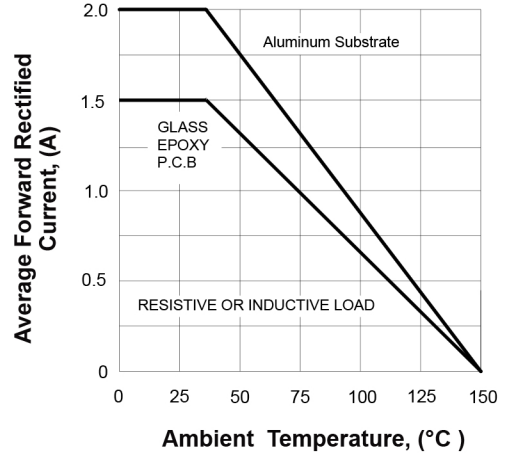


FIG.3 TYPICAL REVERSE CHARACTERISTICS


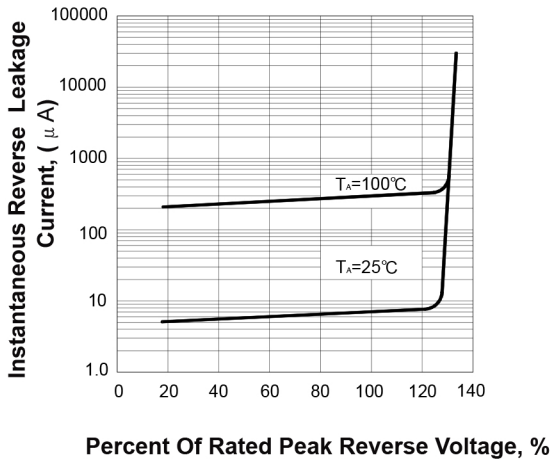


FIG.4 PEAK FORWARD SURGE CURRENT

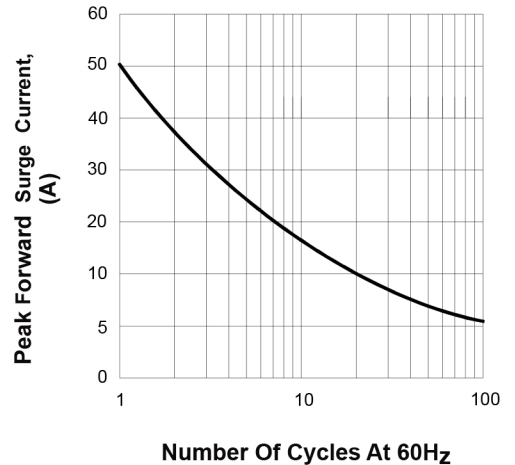

单击下面可查看定价，库存，交付和生命周期等信息

[>>RCD\(达标电子\)](#)