


DBS

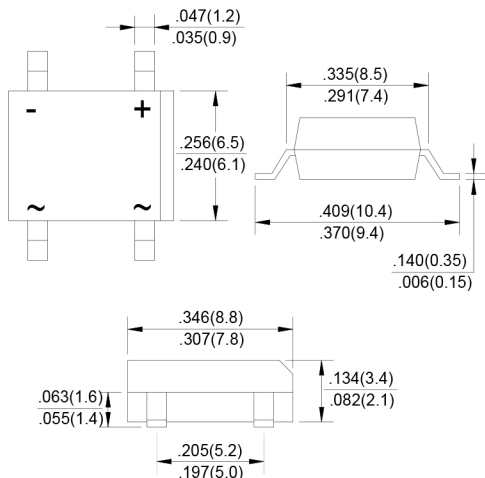

FEATURES

- ◆ Rating to 1000V PRV
- ◆ Ideal for printed circuit board
- ◆ Low forward voltage drop, high current capability
- ◆ Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ◆ The plastic material has UL flammability classification 94V-0

MECHANICAL DATA

Case: Molded plastic body
 Polarity: As marked
 Mounting position : Any
 Weight: 0.02 ounces, 0.38 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	DB201S	DB202S	DB203S	DB204S	DB205S	DB206S	DB207S	UNIT		
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V		
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V		
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V		
Maximum Average Forward Rectified Current @T _A =40°C	I _(AV)	2.0A									
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}					50				A	
Maximum Forward Voltage at 1.5A DC	V _F				1.1					V	
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C	I _R					10					μA
						500					
I ² t Rating for Fusing(t<8.3ms)	I ² t					10.4					A ² s
Typical Junction Capacitance Per Element(Note1)	C _J					25					pF
Typical Thermal Resistance (Note2)	R _{θJA}					40					°C/W
Operating Temperature Range	T _J					-55 to +150					°C
Storage Temperature Range	T _{STG}					-55 to +150					°C

Note:1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC

2. Thermal resistance from junction to ambient mounted on P.C.B with 0.5*0.5"(13*13mm)copper pads.

FIG.1-FORWARD CURRENT DERATING CURVE

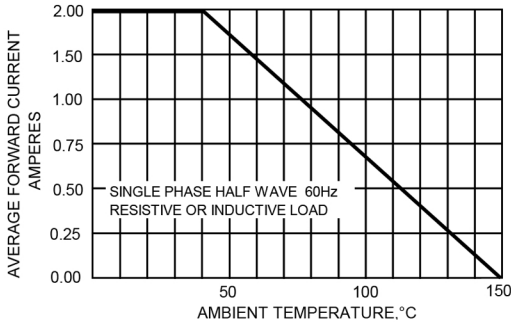


FIG.2-MXIMUM NON-REPETITIVE SURGE CURRENT

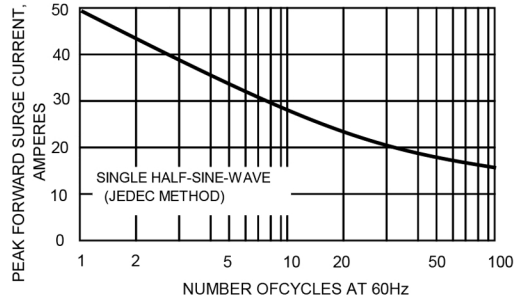


FIG.3-TYPICAL JUNCTION CAPACITANCE

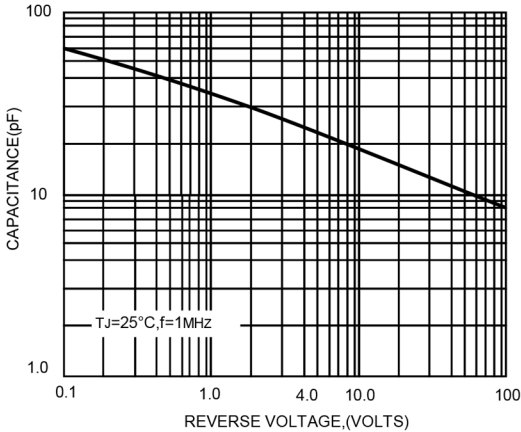


FIG.4-TYPICAL FORWARD CHARACTERISTICS


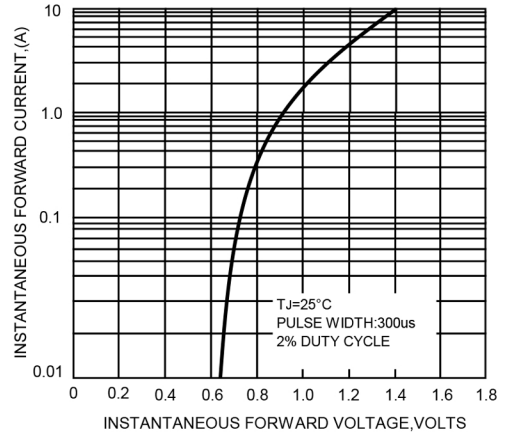


FIG.5-TYPICAL REVERSE CHARACTERISTICS

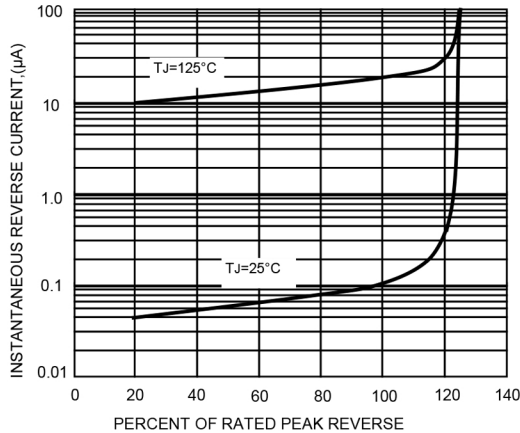

单击下面可查看定价，库存，交付和生命周期等信息

[>>RCD\(达标电子\)](#)