


### 经济型, 厚膜高压高阻贴片电阻

#### 特点

- 适用于高压高阻应用, 阻值范围27MΩ-10GΩ
- 适用于热释电传感器和分压器等
- 可用回流焊或流焊方式进行焊接
- 符合AEC-Q200车规认证



#### 外形尺寸(单位:mm)





系列号	L	W	t	a	b	包装数量
HRCR0603	1.60±0.15	0.80±0.15	0.45±0.10	0.30±0.20	0.30±0.20	5,000pcs
HRCR0805	2.00±0.20	1.25±0.10	0.50±0.10	0.40±0.20	0.40±0.20	
HRCR1206	3.20 <sup>+0.05</sup> <sub>-0.20</sub>	1.60 <sup>+0.05</sup> <sub>-0.15</sub>	0.60±0.10	0.50±0.25	0.50±0.20	
HRCR2512	6.30±0.20	3.20±0.20	0.60±0.10	0.70±0.20	0.70±0.20	4,000pcs

#### 规格参数


系列号	额定功率	最大工作电压	最大过载电压	工作温度范围	温度系数 ppm/°C	阻值范围		
						±5%(E24)	±10%(E24)	±20%(E24)
HRCR0603	0.1W	50V	100V	-55°C~+155°C	±500	27M~1GΩ	27M~1GΩ	27M~1GΩ
HRCR0805	0.125W	150V	300V		±1500	1.2G~10GΩ	1.2G~10GΩ	1.2G~10GΩ
HRCR1206	0.25W	200V	400V		±500	27M~1GΩ	27M~1GΩ	27M~1GΩ
HRCR2512	1W				±1500	1.2G~10GΩ	1.2G~10GΩ	1.2G~10GΩ

#### 降功耗曲线

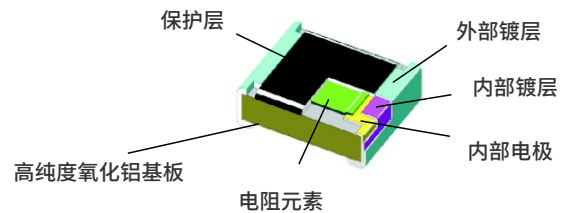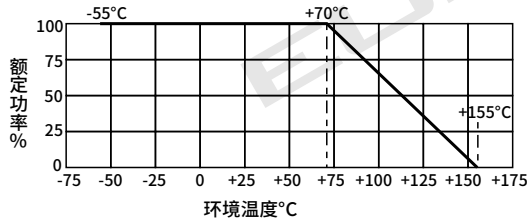

#### 选型表

选型示例:HRCR0805K100MU9 (HRCR 0805 ±10% 100MΩ ±500ppm/°C 标准品)

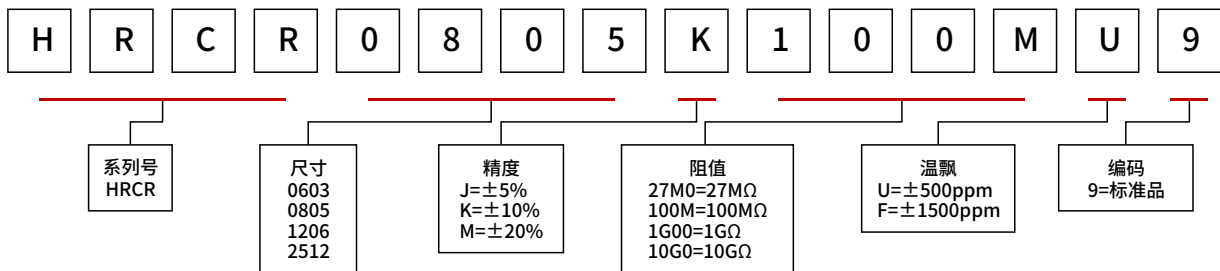

单击下面可查看定价，库存，交付和生命周期等信息

[>>Resi\(开步睿思\)](#)