



# TVS/ESD Arrays

RLSD92Axx1V Series

## TVS/ESD Arrays - RLSD92Axx1V Series

### Features

- 100 Watts Peak Pulse Power per Line (tp = 8/20µs)
- Working voltages: 3.3V、 5V、 8V、 12V、 15V
- Low Leakage Current
- Low operating and clamping voltages
- Lead Free/RoHS compliant
- Solid-state silicon avalanche technology
- Provides ESD protection to IEC61000-4-2(ESD):
  - ±15kV (air discharge)
  - ±8kV (contact discharge)




### Mechanical Characteristics

- SOD-923 package
- Molding compound flammability rating: UL 94V-0
- Quantity Per Reel : 8,000pcs
- Reel Size : 7 inch
- Lead Finish : Lead Free


### Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Pagers Peripherals

### Pinout and Functional Block Diagram

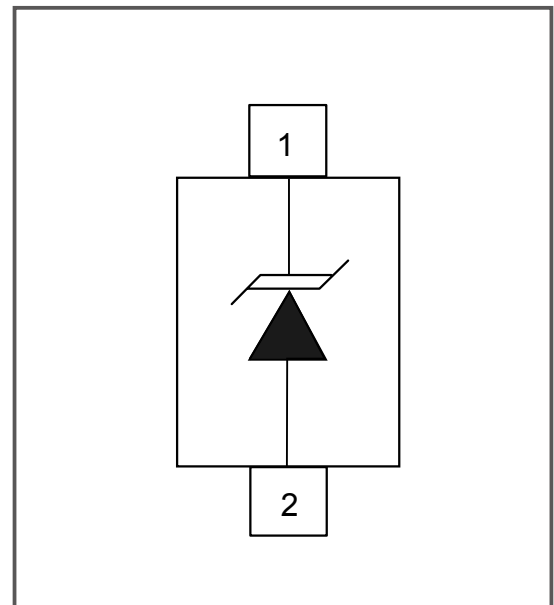

### Part Number Code

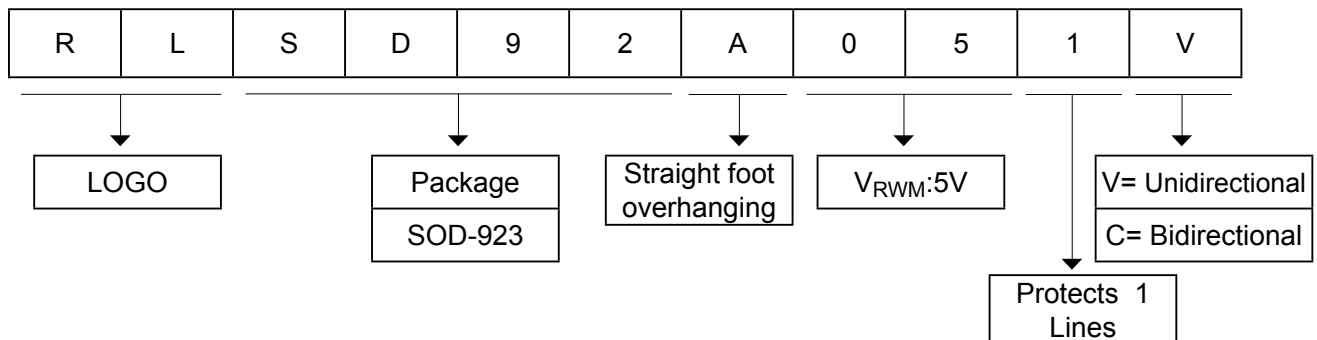


## TVS/ESD Arrays - RLSD92Axx1V Series

### Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{pk}$	100	Watts
ESD Voltage (Contact)	$V_{ESD}$	$\pm 8$	Kv
ESD Voltage (Air)	$V_{ESD}$	$\pm 15$	Kv
Lead Soldering Temperature	$T_L$	260 (10 sec.)	$^{\circ}C$
Operating Temperature	$T_J$	-55 to +125	$^{\circ}C$
Storage Temperature	$T_{STG}$	-55 to +150	$^{\circ}C$

### Electrical Parameters (T=25 $^{\circ}C$ )

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_R$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

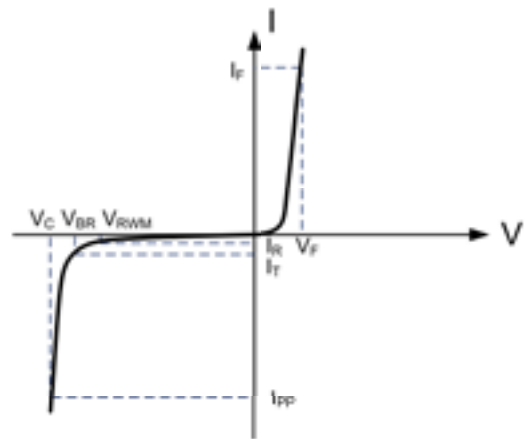

### Electrical Characteristics (@ 25 $^{\circ}C$ Unless Otherwise Specified)

Type Number	Reverse Stand-Off Voltage	Minimum Breakdown Voltage	Peak Pulse Voltage @ 8/20 $\mu s$	Peak Pulse Current @ 8/20 $\mu s$	Reverse Leakage @ $V_{RWM}$	Typical Capacitance
	$V_{RWM}$	$V_{BR}@1mA$	$V_C@1A$	$I_{PP}$	$I_R@V_{RWM}$	DC=0V $C_J@1MHz$
	V	V	V	A	$\mu A$	pF
RLSD92A031V	3.3	4	10	5	2.5	80
RLSD92A051V	5	6	12	5	1	65
RLSD92A081V	8	8.5	15	5	1	50
RLSD92A121V	12	13.3	23	5	1	30
RLSD92A151V	15	16.6	30	1	1	20

## TVS/ESD Arrays - RLSD92Axx1V Series

### Typical Characteristics

Fig1. 8/20 $\mu$ s Pulse Waveform

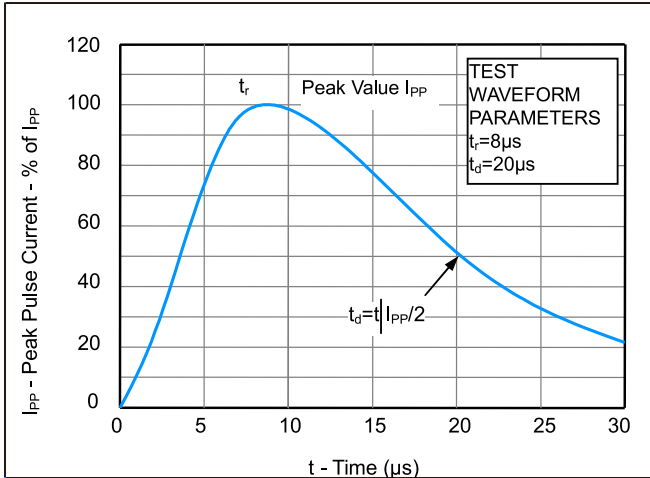


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)

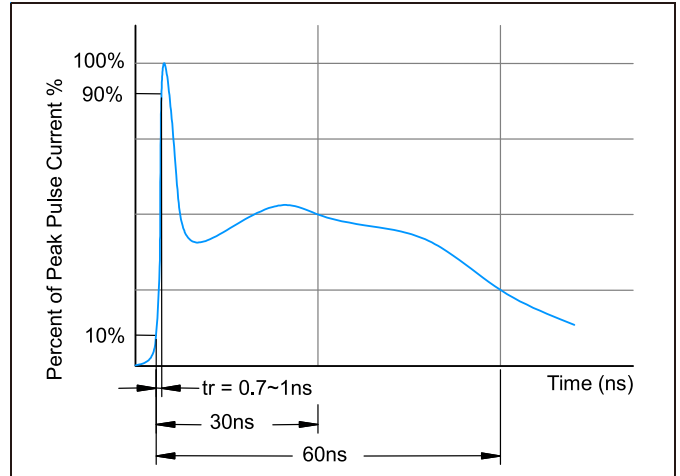


Fig3. Power Derating Curve



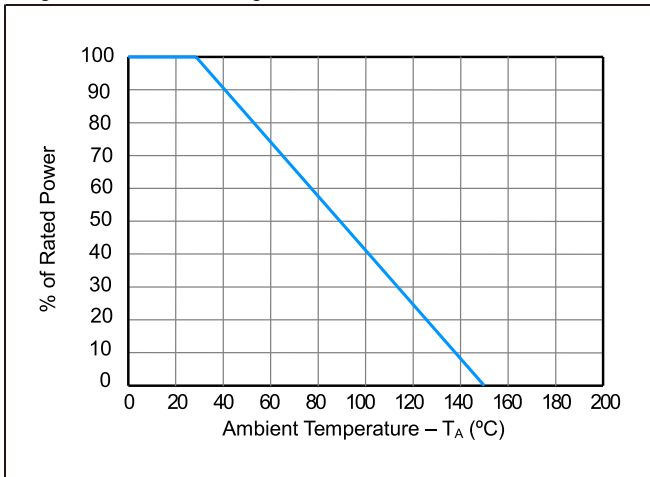


Figure 4: ESD Clamping (8kV Contact per IEC 61000-4-2)

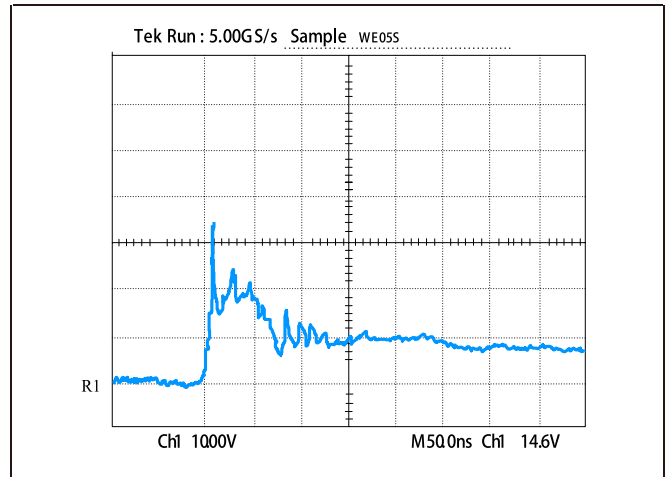

## TVS/ESD Arrays - RLSD92Axx1V Series


### Recommended Soldering Conditions

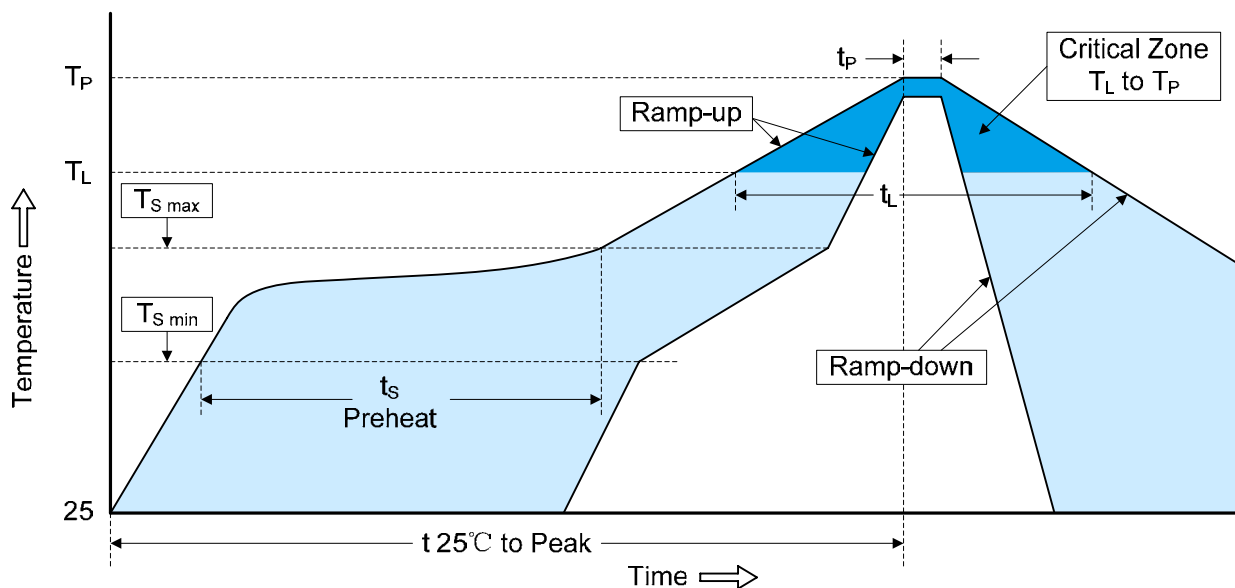

Profile Feature	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	3°C/second max.
Preheat	150°C
-Temperature Min ( $T_{S\ min}$ )	200°C
-Temperature Max ( $T_{S\ max}$ )	60-180 seconds
-Time (min to max) ( $t_s$ )	
$T_{S\ max}$ to $T_L$	3°C/second max.
-Ramp-up Rate	
Time maintained above:	217°C
-Temperature ( $T_L$ )	60-150 seconds
-Time ( $t_L$ )	
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_p$ )	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

## TVS/ESD Arrays - RLSD92Axx1V Series

### Package dimension SOD-923

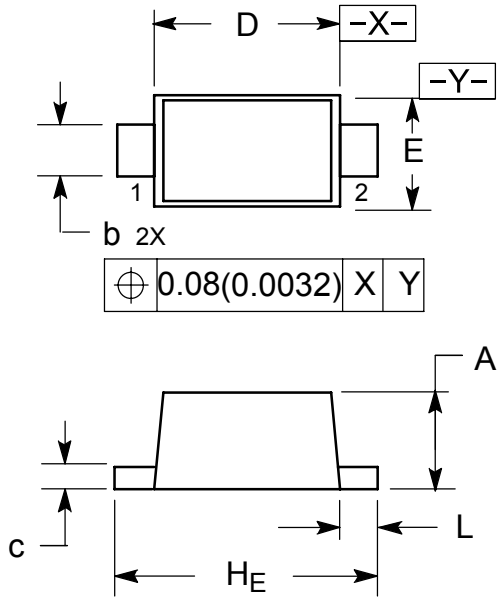

DIM	Dimensions					
	Inches			Millimeters		
	Min	Nom	Max	Min	Nom	Max
A	0.014	0.016	0.017	0.36	0.40	0.43
b	0.006	0.008	0.010	0.15	0.20	0.25
C	0.003	0.005	0.007	0.07	0.12	0.17
D	0.030	0.031	0.038	0.75	0.80	0.85
E	0.022	0.024	0.026	0.55	0.60	0.65
H <sub>E</sub>	0.037	0.039	0.041	0.95	1.00	1.05
L	0.002	0.004	0.006	0.05	0.10	0.15

单击下面可查看定价，库存，交付和生命周期等信息

[>>RUILON\(瑞隆源\)](#)