

RS2G17 Dual Schmitt-Trigger buffer


FEATURES

- Operating Voltage Range: 1.65V to 5.5V
- Low Power Consumption: 1 μ A (Max)
- Operating Temperature Range: -40°C to +125°C
- Input Accept Voltage to 5.5V
- High Output Drive: ± 24 mA at V_{cc}=3.0V
- I_{off} Supports Partial-Power-Down Mode Operation
- Micro SIZE PACKAGES: SOT23-6, SC70-6

APPLICATIONS

- AC Receiver and
- Home Theaters
- Blu-ray Players and Home Theaters
- Desktops or Notebook PCs
- Digital Video Cameras (DVC)
- Mobile Phones
- Personal Navigation Device (GPS)
- Portable Media Player

Functional Block Diagram

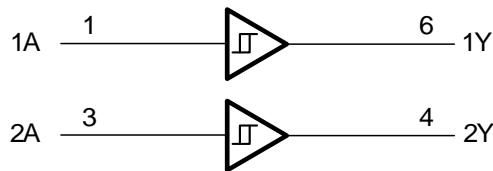

DESCRIPTION

The RS2G17 Dual Schmitt-trigger buffer is designed for 1.65V to 5.5V V_{cc} operation.

The RS2G17 device contains two buffer and performs the Boolean function Y=A. The device functions as two independent buffers with Schmitt-trigger inputs, so the device has different input threshold levels for positive-going (V_{T+}) and negative going (V_{T-}) signals to provide hysteresis(ΔV_T) which makes the device tolerant to slow or noisy input signals.

This device is fully specified for partial-power-down applications using I_{off}. The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

The RS2G17 is available in Green SOT23-6 and SC70-6 packages. It operates over an ambient temperature range of -40°C to +125°C.

Device Information ⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
RS2G17	SOT23-6(6)	2.92mm×1.60mm
	SC70-6(6)	2.10mm×1.25mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

FUNCTION TABLE

INPUT	OUTPUT
A	Y
H	H
L	L

Y=A

H=High Voltage Level


L=Low Voltage Level

Revision History

Note: Page numbers for previous revisions may different from page numbers in the current version.

Version	Change Date	Change Item
A.1	2021/1/26	initial version completed

PIN CONFIGURATIONS

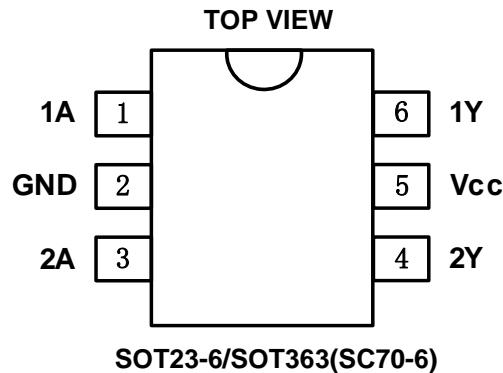

PIN DESCRIPTION

PIN	NAME	I/O TYPE	FUNCTION
SOT23-6/SOT363(SC70-6)			
1	1A	I	Input 1
2	GND	P	Ground
3	2A	I	Input 2
4	2Y	O	Output 2
5	V _{CC}	P	Power Pin
6	1Y	O	Output 1

Specifications

Absolute Maximum Ratings ⁽¹⁾

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾⁽²⁾

			MIN	MAX	UNIT
V _{CC}	Supply voltage range		-0.5	6.5	V
V _I	Input voltage range ⁽²⁾		-0.5	6.5	V
V _O	Voltage range applied to any output in the high-impedance or power-off state ⁽²⁾		-0.5	6.5	V
V _O	Voltage range applied to any output in the high or low state ⁽²⁾⁽³⁾		-0.5	V _{CC} +0.5	V
I _{IK}	Input clamp current	V _I <0		-50	mA
I _{OK}	Output clamp current	V _O <0		-50	mA
I _O	Continuous output current			±50	mA
	Continuous current through V _{CC} or GND			±100	mA
T _J	Junction temperature			150	°C
T _{STG}	Storage temperature		-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V_{CC} is provided in the *Recommended Operating Conditions table*.

ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM)	±8000	V
		Machine model (MM)	±500	V

Thermal Information:

THERMAL METRIC		RS2G17		UNIT	
		6PINS			
		SOT23-6	SOT363/(SC70-6)		
R _{θJA}	Junction-to-ambient thermal resistance	273.8	214.7	°C/W	
R _{θJC(top)}	Junction-to-case(top) thermal resistance	126.8	127.1	°C/W	
R _{θJB}	Junction-to-board thermal resistance	85.9	60.0	°C/W	
Ψ _{JT}	Junction-to-top characterization parameter	10.9	33.4	°C/W	
Ψ _{JB}	Junction-to-board characterization parameter	84.9	59.8	°C/W	
R _{θJC(bot)}	Junction-to-case(bottom) thermal resistance	N/A	N/A	°C/W	

PACKAGE/ORDERING INFORMATION

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING ^(1/2)	PACKAGE OPTION
RS2G17	RS2G17XF6	-40°C ~+125°C	SOT23-6	2G17	Tape and Reel,3000
	RS2G17XC6	-40°C ~+125°C	SC70-6(SOT363)	2G17X	Tape and Reel,3000

NOTE:

- (1) There may be additional marking, which relates to the lot trace code information(data code and vendor code), the logo or the environmental category on the device.
- (2) X = Date Code

MARKING INFORMATION



ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (Full=-40°C to +125°C, typical values are at $T_A = +25^\circ\text{C}$, unless otherwise noted.)⁽¹⁾

Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
Supply voltage	V _{cc}	Operating	1.65	5.5	V
		Data retention only	1.5		
Input voltage	V _I		0	5.5	V
Output voltage	V _O		0	V _{cc}	V
Operating temperature	T _A		-40	+125	°C


DC Characteristics

PARAMETER	TEST CONDITIONS	V _{cc}	TEMP	MIN	TYP	MAX	UNIT
V _{T+}	Positive going input threshold voltage	1.65V 2.3V 3V 4.5V 5.5V	Full	0.75		1.05	V
				1.25		1.55	
				1.5		2.1	
				2.3		3.0	
				2.8		3.4	
V _{T-}	Negative going input threshold voltage	1.65V 2.3V 3V 4.5V 5.5V	Full	0.3		0.6	V
				0.35		0.65	
				0.45		0.75	
				0.7		1.0	
				0.85		1.15	
ΔV _T	Hysteresis (V _{T+} -V _{T-})	1.65V 2.3V 3V 4.5V 5.5V	Full	0.35		0.6	V
				0.6		1.2	
				1.05		1.65	
				1.6		2.0	
				1.95		2.25	
V _{OH}	I _{OH} = -100μA I _{OH} = -4mA I _{OH} = -8mA I _{OH} = -16mA I _{OH} = -24mA I _{OH} = -32mA	1.65V to 5.5V 1.65V 2.3V 3V 4.5V	Full	V _{cc} -0.1			V
				1.2			
				1.9			
				2.4			
				2.3			
				3.8			
V _{OL}	I _{OL} = 100μA I _{OL} = 4mA I _{OL} = 8mA I _{OL} = 16mA I _{OL} = 24mA I _{OL} = 32mA	1.65V to 5.5V 1.65V 2.3V 3V 4.5V	Full			0.1	V
						0.45	
						0.3	
						0.4	
						0.55	
						0.55	
I _I	A input	V _I =5.5V or GND	0V to 5.5V	+25°C Full	±0.1 ±5	±1 ±5	μA
I _{off}		V _I or V _O =5.5V	0	+25°C Full	±0.1 ±10	±1 ±10	μA
I _{cc}		V _I =5.5V or GND, I _O =0	1.65V to 5.5V	+25°C Full	0.1 10	1 10	μA
ΔI _{cc}		One input at V _{cc} -0.6V, Other inputs at V _{cc} or GND	3V to 5.5V	Full		500	μA

AC Characteristics


PARAMETER	SYMBOL	TEST CONDITIONS		TEMP	MIN	TYP	MAX	UNIT
Propagation Delay	t_{pd}	V _{CC} =1.8V±0.15V	C _L =30pF, R _L =500Ω	Full		21		ns
		V _{CC} =2.5V±0.2V	C _L =30pF, R _L =500Ω	Full		7.8		
		V _{CC} =3.3V±0.3V	C _L =50pF, R _L =500Ω	Full		5.7		
		V _{CC} =5V±0.5V	C _L =50pF, R _L =500Ω	Full		4.2		
Input Capacitance	C _i	V _{CC} =3.3V	V _I =V _{CC} or GND	+25°C		4		pF
Power dissipation capacitance	C _{pd}	V _{CC} =1.8V	f=10MHz	+25°C		21		pF
		V _{CC} =2.5V				22		
		V _{CC} =3.3V				22		
		V _{CC} =5V				25		

Parameter Measurement Information

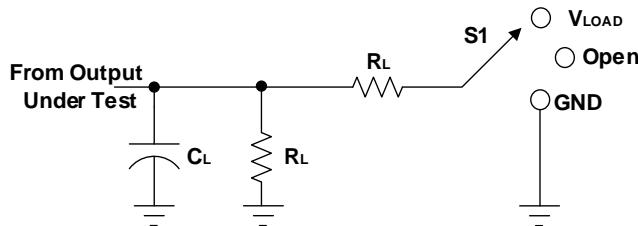

TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PIZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

V _{cc}	INPUTS		V _M	V _{LOAD}	C _L	R _L	V _Δ
	V _I	t _r /t _f					
1.8V±0.15V	V _{cc}	≤2ns	V _{cc} /2	2 x V _{cc}	15pF	1MΩ	0.15V
2.5V±0.2V	V _{cc}	≤2ns	V _{cc} /2	2 x V _{cc}	15pF	1MΩ	0.15V
3.3V±0.3V	3V	≤2.5ns	1.5V	6V	15pF	1MΩ	0.3V
5V±0.5V	V _{cc}	≤2.5ns	V _{cc} /2	2 x V _{cc}	15pF	1MΩ	0.3V

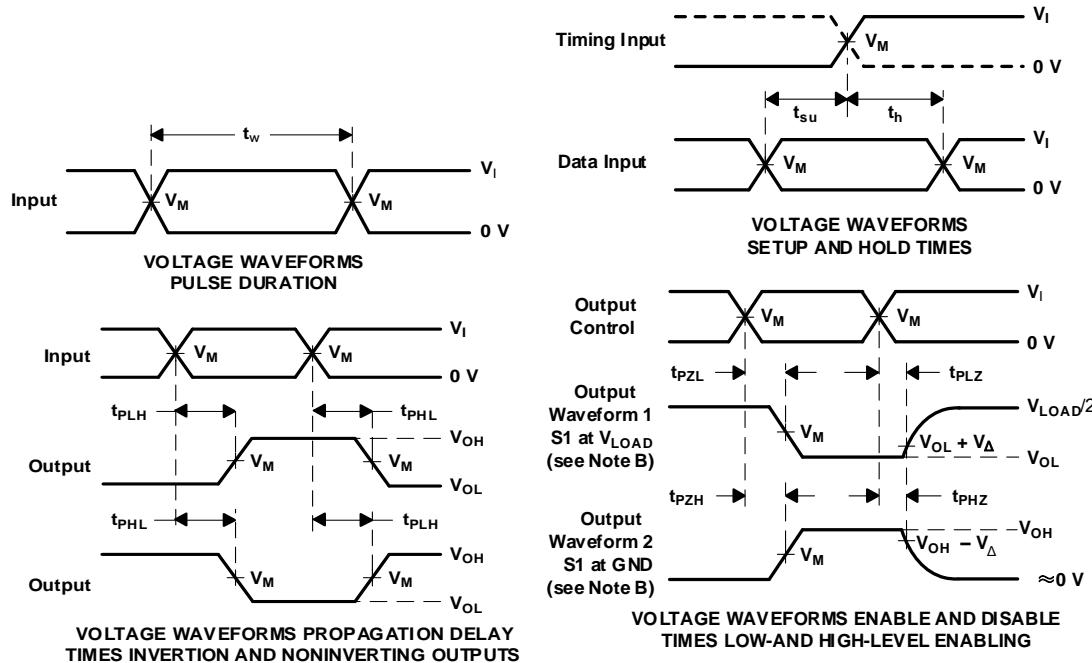

NOTES: A. C_L includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.

Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω.

D. The outputs are measured one at a time, with one transition per measurement.

E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.


F. t_{PZL} and t_{PZH} are the same as t_{en}.

G. t_{PLH} and t_{PHL} are the same as t_{pd}.

H. All parameters and waveforms are not applicable to all devices.


Figure 1. Load Circuit and Voltage Waveforms

Parameter Measurement Information

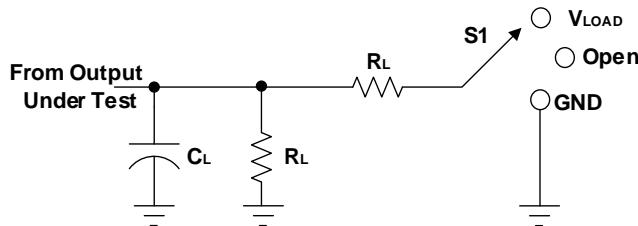

TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PIZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

V _{cc}	INPUTS		V _M	V _{LOAD}	C _L	R _L	V _Δ
	V _I	t _r /t _f					
1.8V±0.15V	V _{cc}	≤2ns	V _{cc} /2	2 × V _{cc}	30pF	1kΩ	0.15V
2.5V±0.2V	V _{cc}	≤2ns	V _{cc} /2	2 × V _{cc}	30pF	500Ω	0.15V
3.3V±0.3V	3V	≤2.5ns	1.5V	6V	50pF	500Ω	0.3V
5V±0.5V	V _{cc}	≤2.5ns	V _{cc} /2	2 × V _{cc}	50pF	500Ω	0.3V

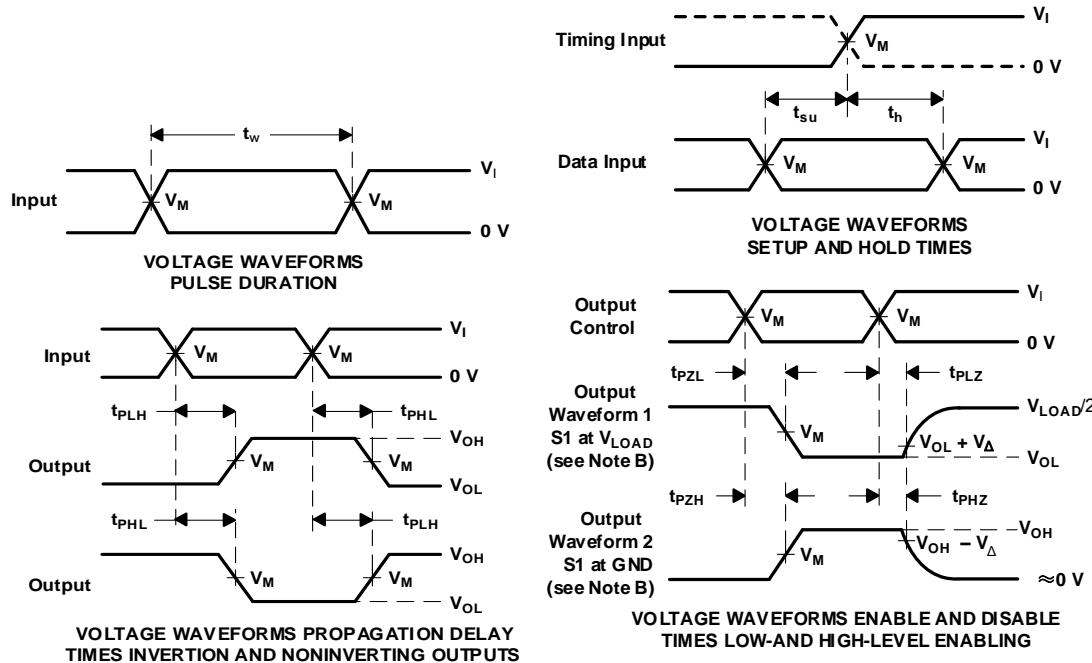

NOTES: A. C_L includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.

Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_o = 50 Ω.

D. The outputs are measured one at a time, with one transition per measurement.

E. t_{PZL} and t_{PHZ} are the same as t_{dis}.



F. t_{PZH} and t_{PLZ} are the same as t_{en}.

G. t_{PLH} and t_{PHL} are the same as t_{pd}.



H. All parameters and waveforms are not applicable to all devices.

Figure 2. Load Circuit and Voltage Waveforms

PACKAGE OUTLINE DIMENSIONS SOT23-6

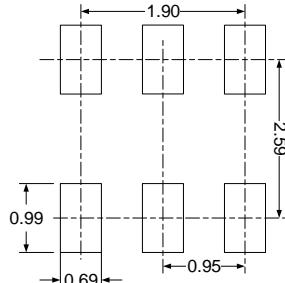
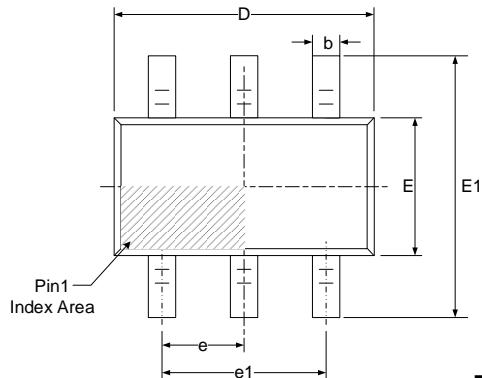


RECOMMENDED LAND PATTERN (Unit: mm)

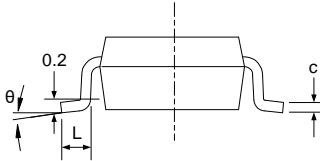
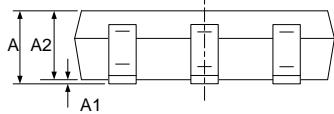


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT363(SC70-6)

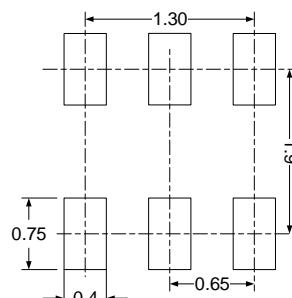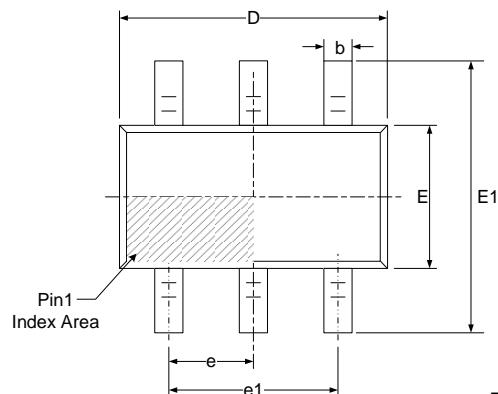

RECOMMENDED LAND PATTERN (Unit: mm)

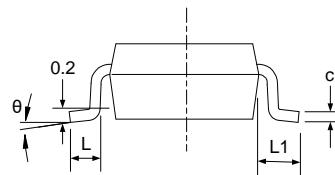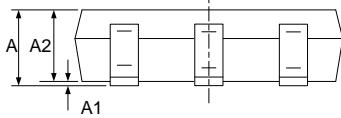

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650(BSC)		0.026(BSC)	
e1	1.300(BSC)		0.051(BSC)	
L	0.260	0.460	0.010	0.018
L1	0.525		0.021	
θ	0°	8°	0°	8°

单击下面可查看定价，库存，交付和生命周期等信息

[>>Runic\(润石\)](#)