


# CL31X226KQHNNN


## 规格书

特性	标称容值	容值精度	额定电压	温度特性	尺寸	长度	宽度	厚度
数值	22.0uF	±10%	6.3Vdc	X6S	1206(unit:inch), 3216(unit:mm)	3.20±0.20mm	1.60±0.20mm	1.60±0.20mm


## 数据图

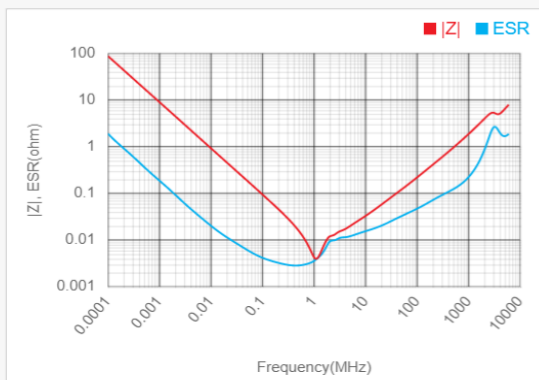


**Frequency Characteristics**  
Network Analyzer

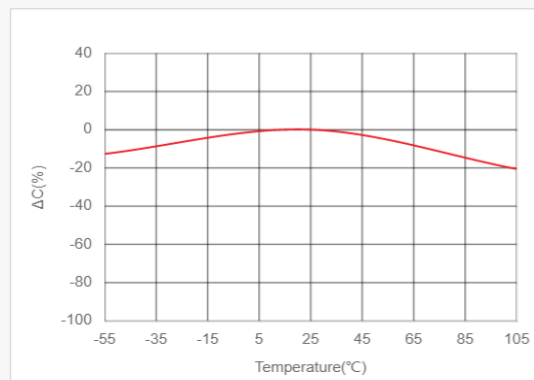


**Temperature Characteristics of Capacitance(TCC)**  
LCR meter, 0.12kHz, 0.5Vrms

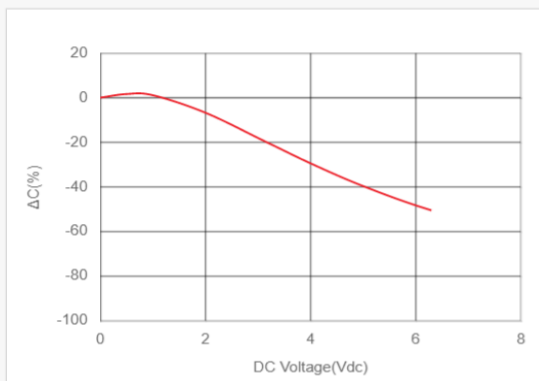


**DC Bias Characteristics**  
LCR meter, 0.12kHz, 0.5Vrms

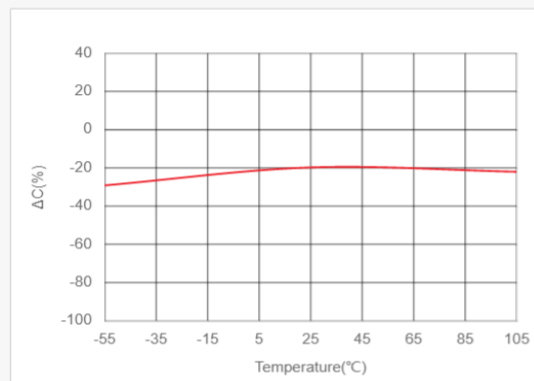

**Bias TCC Characteristics**  
LCR meter, 0.12kHz, 0.5Vrms, 3.15Vdc

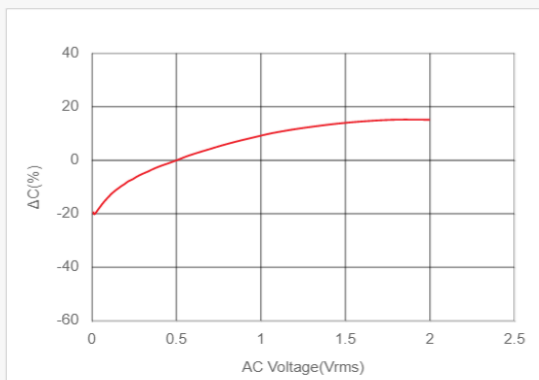

**AC Voltage Characteristics**  
LCR meter, 0.12kHz

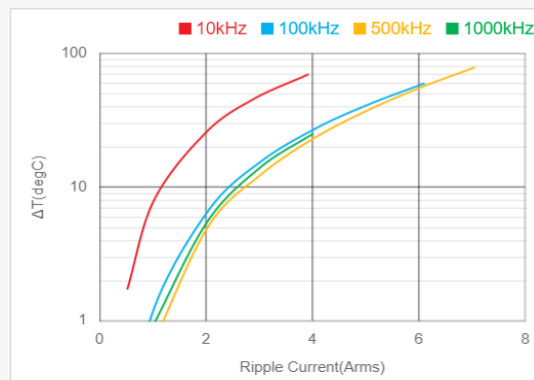

**Temperature Rise by Ripple Current**



本表中的任何数据如有变动、修改或终止，恕不另行通知。本数据表列出了典型数据，仅供设计参考。如对本数据表有任何疑问，请联系我司销售人员或AE。

单击下面可查看定价，库存，交付和生命周期等信息

[>>Samsung Electro-Mechanics\(三星电机\)](#)