


## LED Module

# LT-F564A



### Features & Benefits

- Excellent for High Bay, Low Bay, and High Mount Fixtures
- Metal Core PCB for maximum heat dissipation
- Simple mounting – Screw mounted on module edges
- Continuous LED spacing for even lumen distribution
- Input and Output Poke-In connectors for easy wiring
- End to End mounting for long linear applications

### Applications

#### Industrial Lighting:

- Warehouse / Retail / Industrial spaces



## Table of Contents

1.	Product Code Information	-----	3
2.	Characteristics	-----	3
3.	Structure and Assembly	-----	5
4.	Certification and Declaration	-----	8
5.	Label Structure	-----	9
6.	Packing Structure	-----	12
7.	Precautions in Handling & Use	-----	13



## 1. Product Code Information

Nominal CCT (K)	Product Code
3500	SL-B8U7NK0L2WW
4000	SL-B8T7NK0L2WW
5000	SL-B8R7NK0L2WW

## 2. Characteristics

Item	Rating	Unit	Remark
Rated Lifetime	70,000	hour	L70
Ingress Protection (IP)	no rating	-	
Ambient / Operating Temperature ( $t_{amb}$ )	-20 ~ +50	°C	
Storage Temperature	-30 ~ +80	°C	

Item	Nom. CCT (K)	Rating			Unit	Remark
		Min	Typ.	Max		
Luminous Flux ( $\Phi_v$ )	3500	8280	8810	9350	lm	$I_f = 1500 \text{ mA}$ $t_p = 25 \text{ }^\circ\text{C}$
	4000	8470	8850	9370		
	5000	8670	9050	9570		
Luminous Efficacy	3500	-	118	-	lm/W	
	4000	-	119	-		
	5000	-	122	-		
CCT	3500	3339	3449	3575	K	
	4000	3853	3986	4137		
	5000	4799	5021	5271		
Color Consistency (initial)		-	4	-	MacAdam step	
Color Rendering Index (Ra)		80	-	-	-	
Operating Current ( $I_f$ )		-	1500	-	mA	-
Operating Voltage ( $V_f$ )		47.3	49.6	51.9	Vdc	$I_f = 1500 \text{ mA}$
Power Consumption		-	74.4	-	W	$t_p = 25 \text{ }^\circ\text{C}$

### Notes:

- $t_p$ : temperature at which performance is specified; measured at "Tc point".
- Samsung maintains a measurement tolerance of: Luminous flux:  $\pm 7 \%$ , CRI:  $\pm 3.0$ , Voltage:  $\pm 0.3 \text{ V}$ , Power Consumption:  $\pm 0.3 \text{ W}$



Item	Nominal*	Life**	Max***	Unit
Temperature	25 ( $t_p$ )	85( $t_{p,50}$ )	85( $t_c$ )	°C

**Notes:**

- \* Temperature used to specify performance of the module ( $t_p$ ).
- \*\* Rated maximum performance temperature at which lifetime is specified ( $t_{p,50}$ ).
- \*\*\* Rated maximum temperature, highest permissible temperature to avoid safety risk ( $t_c$ ).

All temperatures are measured at the designated “Tc point” as indicated on the module.




### 3. Structure and Assembly

#### a) Appearance



#### b) Dimension

Dimension	Specification	Tolerance	Unit
Module Length	558.8	±0.3	mm
Module Width	40.0	±0.2	mm
Module Height	5.9	±0.2	mm
PCB Thickness	1.65	±0.115	mm
Module Weight	99.5	±5.0	g

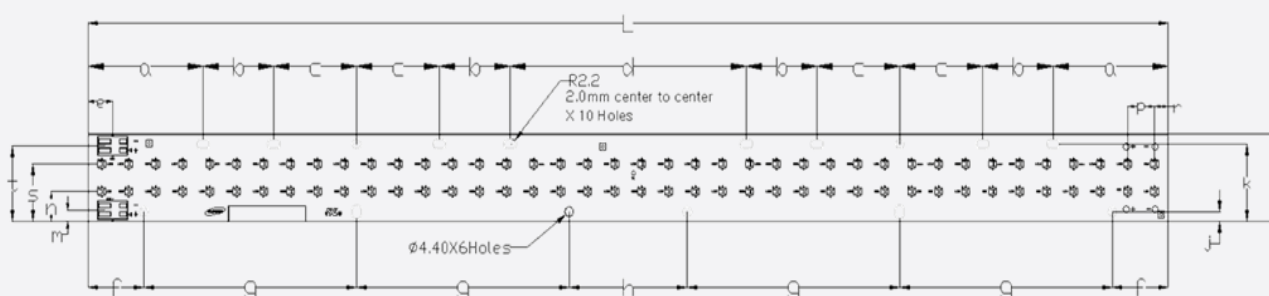


Unit [mm]

ITEM	SPECIFICATION	ITEM	SPECIFICATION	ITEM	SPECIFICATION
a	59.53	g	110	n	13.65
b	36.51	h	61	p	13.97
c	42.86	j	4.5	r	7.05
d	122.25	k	35.5	s	26.35
e	12.7	L	558.8	t	34.66
f	28.9	m	5.34	W	40

### c) Assembly

Connectors on the board are provided for easy wiring with the LED driver and between modules

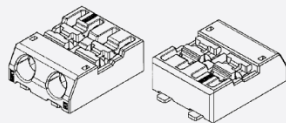


### d) Structure

Item	Specification
LED	LM302A Middle Power LED
PCB	MPCPB; Material: Copper, Solder mask, Epoxy
Connector	Reworkable poke-in connector type
Wire	24~18 AWG; terminal strip length of 7.5~8.5 mm

### e) Light Distribution

Polar Intensity Diagram: Beam Angle  $115 \pm 5^\circ$

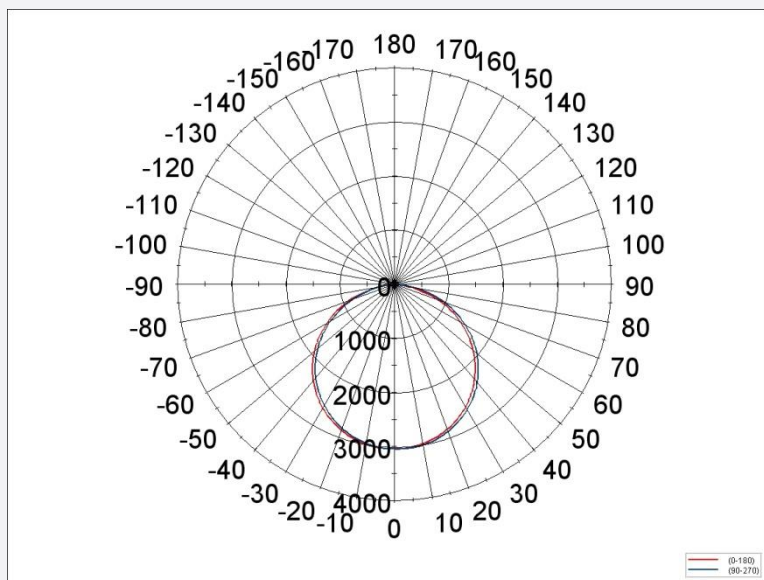


## f) Thermal Management

Performance temperatures are measured on “Tc point” as indicated on the module.



## g) Schematic Circuit

8s x 10p

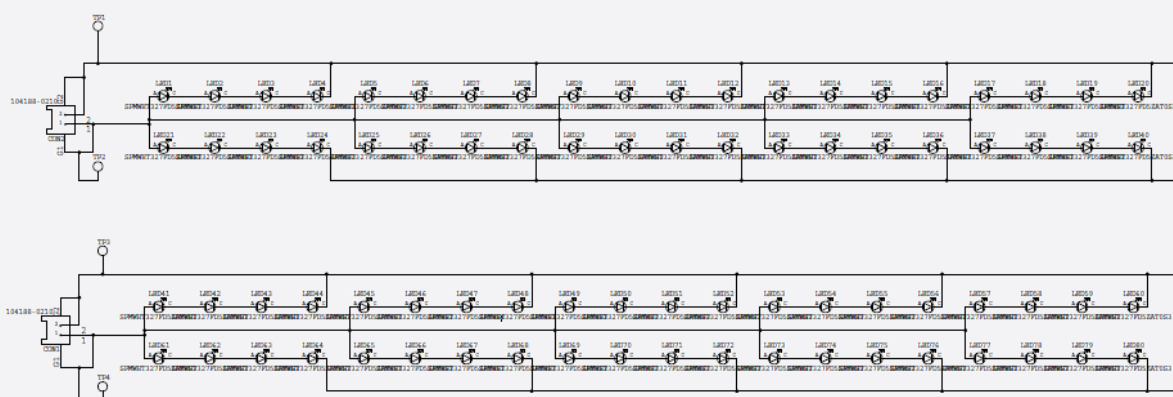

#### 4. Certification and Declaration

Item	Compliant to	Remark
Test & Certification	CE	TBD
	ENEC	TBD
	VDE	-
	UL	E344519
	cUL f	-
	Photo biological Safety(LM302A LED)	IEC / EN 62471
Declaration	RoHS	Hazardous Substance & Material
	REACH	Hazardous Substance & Material






## 5. Label Structure

### a) Module Label

#### A. Printing Label

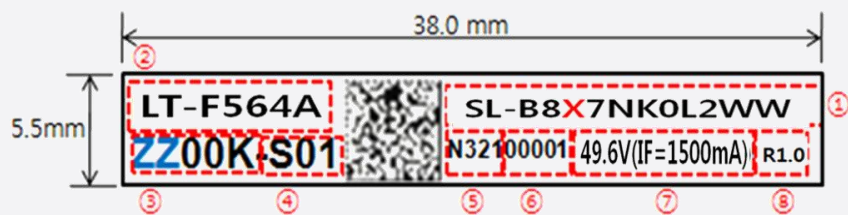

#### B. Information of Barcode

- ① Model code: SI-B8X7NK0L2WW  
**X**: U(3500K), T(4000K), R(5000K)
- ② Product name : LT-F564A
- ③ Color temperature: **ZZ**00K  
**ZZ**: 35, 40, 50
- ④ LED Maker: -S (Samsung)  
 Group No. : 01 (Binning group)
- ⑤ SMT date: N321 (2012-March-21th)  
 A(2000), B(2001) ······ J(2009), K(2010), L(2011), ······ (year)  
 1(January), ······ 9(September), A(October), B(November), C(December)(month)  
 01, 02, ······ 31th (date)
- ⑥ Serial No: 00001~99999, (Setting "00001" every working day)
- ⑦ 46.9V (IF=1500mA)
- ⑧ Module Revision: R1.0

## C. QR CODE Information


[LT-564A]

Model CODE	SI-B8X7NK0L2WW
QR CODE Information	SI-B8X7NK0L2WW N321100001ZZ00K-S01
Printed CODE Information	SI-B8X7NK0L2WW N321100001ZZ00K-S01

LT-F564A  
ZZ00K-S01




SL-B8X7NK0L2WW  
N32100001 49.6V(IF=1500mA) R1.0





## B) Box Label

- 100mm x 50mm

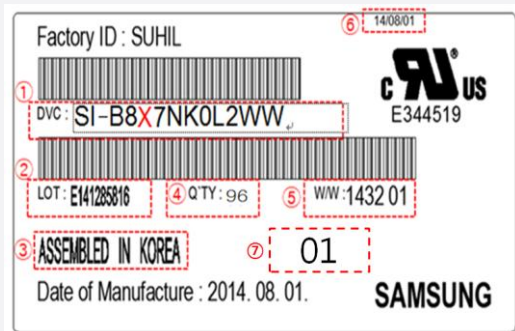

The lot number is composed of the following characters:

- ① Product code
- ② Lot ID
- ③ Place of origin
- ④ Quantity
- ⑤ Describe production week  
NN: LT-F564A - 96
- ⑥ Date of Issue

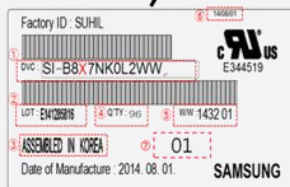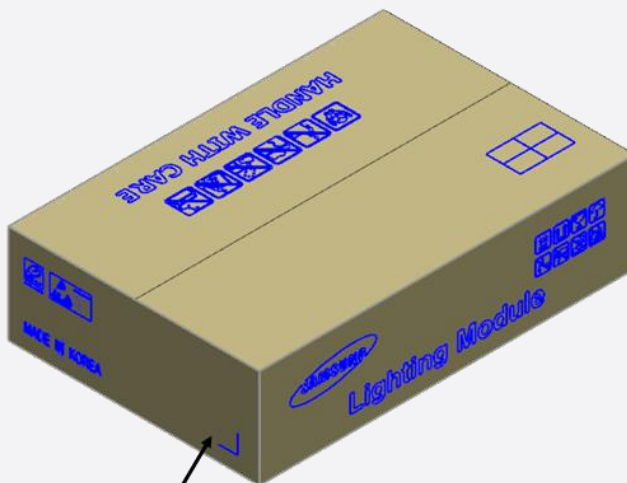

## 6. Packing Structure

ARTICLE	TRAY	BOX	PALLET	REMARK
Quantity	32 ea	96 ea	1920 ea	-



## 7. Precautions in Handling & Use

A. The LED Lighting Modules for white light are devices which are materialized by combining white LEDs.

The color of white light can differ a little unusually to diffuser plate(sign-board panel).

Also when the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

### B. Handling

To prevent the LED Lighting Modules from making any defectives, please handle the LED Lighting Modules with care as follows.

- (1) Don't drop the unit and don't give the unit any shocks.
- (2) Don't bend the PCB and don't touch the LED Resin.
- (3) Don't storage the Module in a dusty place or room.
- (4) Don't take the product apart.
- (5) Don't touch the LED and also PCB and other circuit parts of Module with your naked fingers or sharpness things.
- (6) Take care so that do not pull wire with hand in case of carries or moves LED Lighting Modules.

### C. Cleaning

The LED Lighting Modules should not be used in any type of fluid such as water, oil, organic solvent, etc.

It is recommended that IPA (Isopropyl Alcohol) be used as a solvent for cleaning the LED Lighting Modules.

When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations. Do not clean the LED Lighting Modules by the ultrasonic.

Before cleaning, a pre-test should be done to confirm whether any damage to the LED Lighting Modules will occur.

### D. Static Electricity

Static electricity or surge voltage damages the LED Lighting Modules. Please keep the working process anti-static electricity condition to prevent the Lighting from destroying, as following.

- (1) Anyone who handles the unit should be well grounded.(earth ring or anti-static glove)
- (2) Anyone who handles the unit should wear anti-electrostatic working clothes.
- (3) All kinds of device and instruments, such as working table, measuring instruments and assembly jigs in your production lines should be well grounded.

### E. Storage

The LED Lighting Modules must be stored to insert a package of a moisture absorbent material(silica gel) in a box.

### F. Others

If over voltage which exceeds the absolute maximum rating is applied to LED Lighting Modules.

It will cause damage Circuits(that LED is included) and result in destruction.

Do not directly look into lighted LED with naked eyes.

Please use this product within 5 months, which is kept in its original packaging unopened when stocked



# Legal and additional information.

## [About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd. is a global leader in technology, opening new possibilities for people everywhere. Through relentless innovation and discovery, we are transforming the worlds of TVs, smartphones, tablets, PCs, cameras, home appliances, printers, LTE systems, medical devices, semiconductors and LED solutions. We employ 286,000 people across 80 countries with annual sales of US\$216.7 billion. To discover more, please visit [www.samsungled.com](http://www.samsungled.com).

Copyright © 2015 Samsung Electronics Co., Ltd. All rights reserved.  
Samsung is a registered trademark of Samsung Electronics Co., Ltd.  
Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.  
95, Samsung 2-ro  
Giheung-gu  
Yongin-si, Gyeonggi-do, 446-711  
KOREA

[www.samsungled.com](http://www.samsungled.com)



单击下面可查看定价，库存，交付和生命周期等信息

[>>Samsung Semiconductor\(三星半导体\)](#)