


TIGER CLAW™ SURFACE MOUNT SOCKET

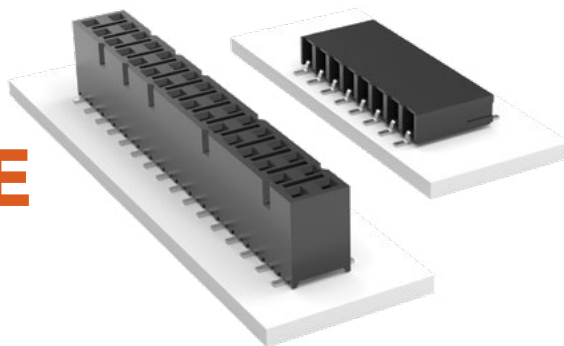

(2.54 mm) .100" PITCH • SSM SERIES

SSM

Mates:

TSW, MTSW,
TST, TSS, ZST, ZSS,
DW, EW, ZW, TSM,
HMTSW, HTSW, TSSH,
BST, HTSS, TLW, MTLW

SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over
50 μ" (1.27 μm) Ni

Current Rating (SSM/TSW):

5.2 A per pin
(2 pins powered)

Voltage Rating:

405 VAC / 572 VDC

Operating Temp Range:

-55 °C to +125 °C with Gold
-55 °C to +105 °C with Tin

Insertion Depth:

SV/DV = (4.34 mm) .171" to
(7.24 mm) .285" or pass-through
from top; (5.56 mm) .219"
plus board thickness minimum
from bottom;

SH/DH = (4.34 mm) .171" to
(6.35 mm) .250"

Normal Force:

125 grams (1.21 N) average

PROCESSING

Lead-Free Solderable:

Yes

-DH Coplanarity:

Less than 28 positions

(0.15 mm) .006" max*

More than 27 positions

(0.20 mm) .008" max*

-SH, -SV, -DV Coplanarity:

(0.15 mm) .006" max*

*(.004" stencil solution

may be available; contact

IPG@samtec.com)


ALSO AVAILABLE

Alignment pin

(MOQ Required)



Note:
Some lengths, styles and
options are non-standard,
non-returnable.

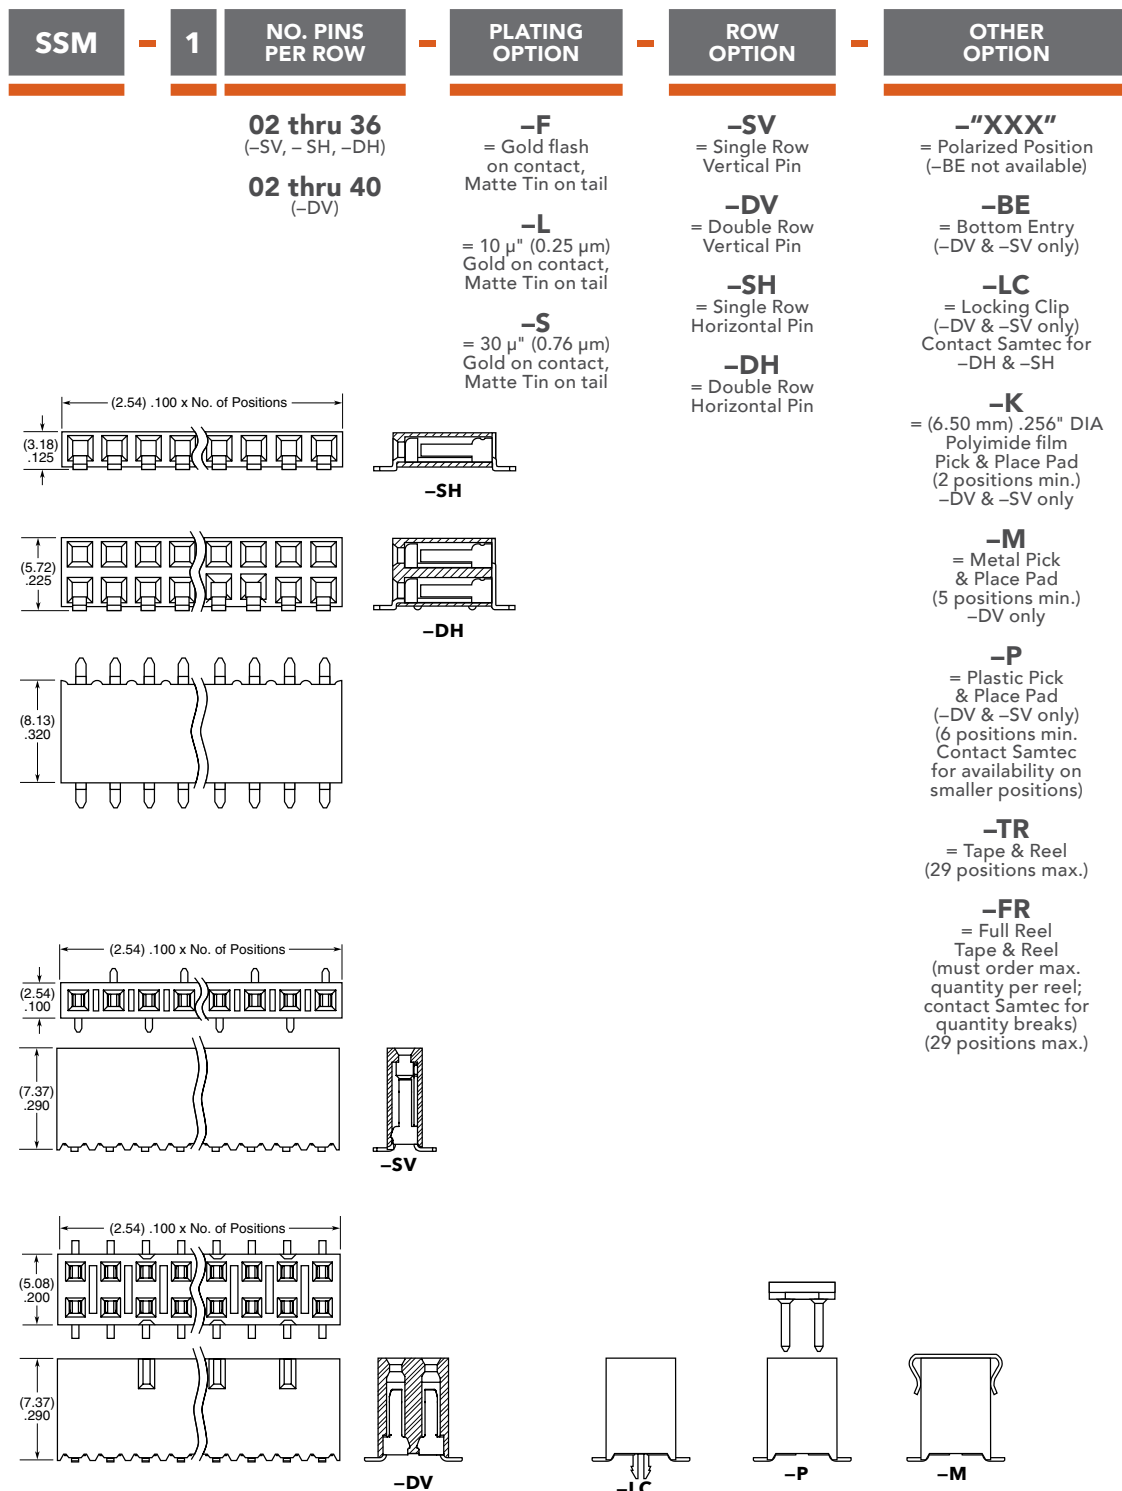

单击下面可查看定价，库存，交付和生命周期等信息

[>>SAMTEC](#)