



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

NLC Series

• 105°C 10,000Hrs assured.

- Low impedance.
- Long Life.
- For SMPS, IP-Board, Adaptor.
- RoHS compliant.
- Halogen-free capacitors are also available.

Solvent-proof

WV \leq 50V_{DC}

NLA

NLC

$\varnothing 8 \downarrow$
Long Life




SPECIFICATIONS

Item	Characteristics																																						
Rated Voltage Range	6.3 ~ 100 V _{DC}																																						
Operating Temperature Range	-40 ~ +105°C																																						
Capacitance Tolerance	$\pm 20\%(\text{M})$ (at 20°C, 120Hz)																																						
Leakage Current	$I=0.01CV(\mu\text{A})$ or $3\mu\text{A}$, whichever is greater. Where, I: Max.Leakage current(μA) C: Nominal capacitance (μF) V: Rated voltage (V _{DC}) (at 20°C, 2 minutes)																																						
Dissipation Factor(Tanδ)	<table border="1"> <tr> <td>Rated Voltage(V_{DC})</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr> <tr> <td>Tanδ(Max.)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.17</td><td>0.15</td></tr> </table> <p>When the capacitance exceeds $1,000\mu\text{F}$, 0.02 shall be added every $1,000\mu\text{F}$ increase. (at 20°C, 120Hz)</p>								Rated Voltage(V _{DC})	6.3	10	16	25	35	50	63	100	Tanδ(Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.17	0.15													
Rated Voltage(V _{DC})	6.3	10	16	25	35	50	63	100																															
Tanδ(Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.17	0.15																															
Temperature Characteristics (Max. Impedance ratio)	<table border="1"> <tr> <td>Rated voltage(V_{DC})</td><td>6.3</td><td>10</td><td>16</td><td>25~35</td><td>50~100</td><td colspan="4" style="text-align: right;">(at 120Hz)</td></tr> <tr> <td>Z(-25°C)/Z(+20°C)</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td colspan="4"></td></tr> <tr> <td>Z(-40°C)/Z(+20°C)</td><td>8</td><td>6</td><td>4</td><td>3</td><td>4</td><td colspan="4" rowspan="4"></td></tr> </table>									Rated voltage(V _{DC})	6.3	10	16	25~35	50~100	(at 120Hz)				Z(-25°C)/Z(+20°C)	4	3	2	2	2					Z(-40°C)/Z(+20°C)	8	6	4	3	4				
Rated voltage(V _{DC})	6.3	10	16	25~35	50~100	(at 120Hz)																																	
Z(-25°C)/Z(+20°C)	4	3	2	2	2																																		
Z(-40°C)/Z(+20°C)	8	6	4	3	4																																		
Load Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105°C.</p> <p>Capacitance change $\leq \pm 25\%$ of the initial value</p> <p>Tanδ $\leq 200\%$ of the initial specified value</p> <p>Leakage current \leq The initial specified value</p>																																						
Shelf Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p> <p>The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change $\leq \pm 25\%$ of the initial value</p> <p>Tanδ $\leq 200\%$ of the initial specified value (where, 300% for $\geq \text{WV}63\text{VDC}$)</p> <p>Leakage current \leq The initial specified value</p>																																						
Others	Satisfied characteristics KS C IEC 60384-4																																						

DIMENSIONS OF NLC Series

Unit(mm)

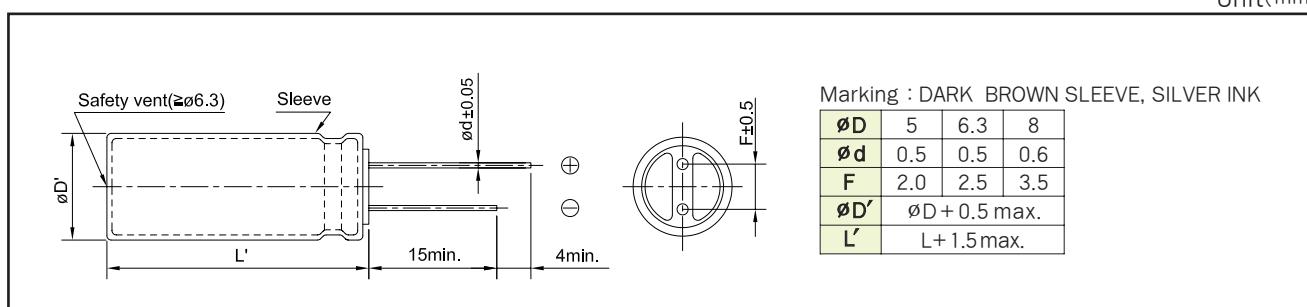

RATINGS OF NLC Series

VDC Ø D × L (mm)	6.3			10			16		
	µF	IMP.	Ripple	µF	IMP.	Ripple	µF	IMP.	Ripple
5×11	150	0.70	175	100	0.70	175	47	0.70	175
6.3×11	330	0.50	252	220	0.50	250	100	0.50	252
8×11.5	680	0.24	400	470	0.24	400	330	0.24	400

VDC Ø D × L (mm)	25			35			50		
	µF	IMP.	Ripple	µF	IMP.	Ripple	µF	IMP.	Ripple
5×11							1	4.0	32
5×11							2.2	3.0	43
5×11							3.3	2.5	84
5×11							4.7	2.5	100
5×11	47	0.70	175	33	0.70	175	10	2.0	110
6.3×11	100	0.50	252	47	0.60	252	22	1.6	228
6.3×11				56	0.50	252	33	1.6	228
8×11.5	220	0.24	400	150	0.24	400	47	0.80	330
8×15				220	0.18	520	100	0.50	400

↑ Impedance (Ω max./20°C, 100kHz)

VDC Ø D × L (mm)	63		100	
	µF	Ripple	µF	Ripple
8×11.5	47	270	33	240

↑ ↑ Rated Ripple Current (mA rms/105°C, 100kHz)
Nominal Capacitance(µF)

RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap.(µF)	Freq.(Hz)				
	120	1k	10k	50k	100k
1~150	0.40	0.75	0.90	0.93	1.00
220~470	0.50	0.85	0.94	0.96	1.00
680	0.60	0.87	0.95	0.97	1.00

单击下面可查看定价，库存，交付和生命周期等信息

[**>>SAMYOUNG\(三莹\)**](#)