

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification
 1= 010

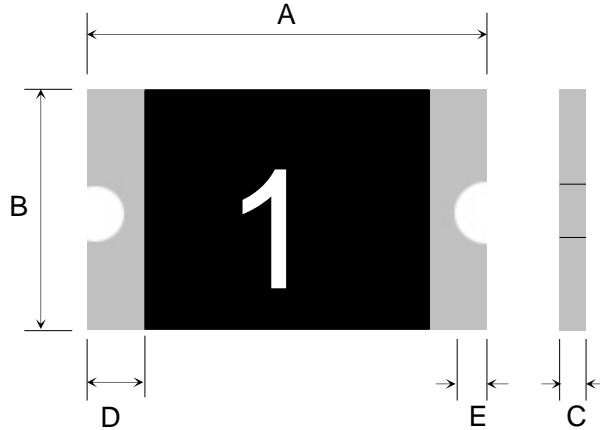


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0603-010-24V	1	1.45	1.85	0.65	1.05	0.40	1.00	0.15	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R _{i_min} (Ω)	R _{1_max} (Ω)
SMD0603-010-24V	1	24.0	40	0.10	0.30	0.50	0.5	1.00	0.900	10.000

Order Information

Packaging

SMD0603	010	-24V	Tape & Reel Quantity
Product name	Hold	Max	5,000 pcs/reel
Size 1508 mm / 0603 mils	Current	voltage	
SMD: surface mount device	0.10A		

Recognition: UL Pending.

单击下面可查看定价，库存，交付和生命周期等信息

[>>SEA-LAND\(台湾陆海\)](#)