

**SEA&LAND ELECTRONIC CORP.**

13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: nSMD150-13.2V  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2020/12/2  
 PAGE NO.: 1 of 1

# Specification Sheet

Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.


Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

**Marking:**

Part Identification

nSMD150 = α I

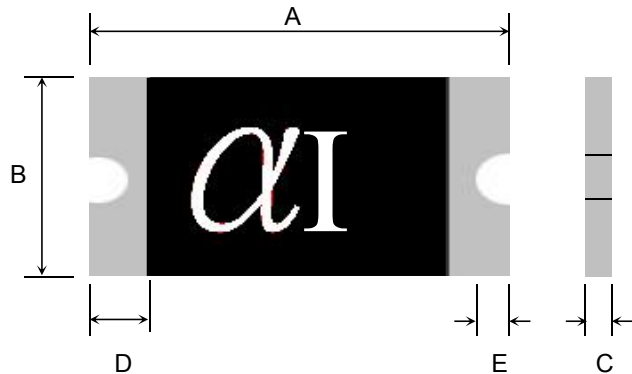

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD150-13.2V	α I	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> @25°C (A)	I <sub>trip</sub> @25°C (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R <sub>i_min</sub>	R <sub>1_max</sub>
									(Ω)	(Ω)
nSMD150-13.2V	α I	13.2	100	1.50	3.00	0.8	8.0	1.00	0.030	0.130

**Order Information**

**Packaging**

SMD1206	150	-13.2V	Tape & Reel Quantity
Product name	Hold	Max	3000 pcs/reel
Size 3216 mm / 1206 mils	Current	voltage	
SMD: surface mount device	1.50A		

Recognition: UL Approved.

E201504/E319079



单击下面可查看定价，库存，交付和生命周期等信息

[>>SEA-LAND\(台湾陆海\)](#)