


GENERAL DESCRIPTION

The SGM7SZ14 is a single inverter with Schmitt trigger input through advanced CMOS technology. The supply voltage pin of this device accepts any voltage from 1.65V to 5.5V. The inputs can tolerate a maximum of 6V, regardless of the supply voltage range. When V_{CC} is at 0V, the inputs and output are in the high-impedance state.

This device can achieve ultra-high speed operation with high output drive, while the low static power dissipation over the wide supply voltage operating range is maintained.

The SGM7SZ14 is available in Green SOT-23-5 and SC70-5 packages. It operates over an ambient temperature range of -40°C to $+125^{\circ}\text{C}$.

LOGIC SYMBOL

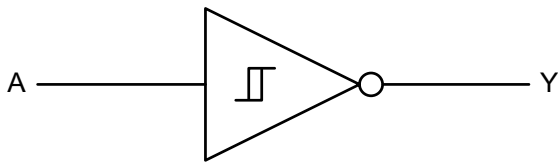

FEATURES

- **Wide Supply Voltage Range: 1.65V to 5.5V**
- **Ultra-High Speed: t_{PD} of 4.2ns (TYP) into 50pF at $V_{CC} = 3.3\text{V}$**
- **Support LCX Performance at $V_{CC} = 3.3\text{V}$**
- **High Output Drive: $\pm 24\text{mA}$ at $V_{CC} = 3\text{V}$**
- **Inputs Over-Voltage Tolerance Makes 5V to 3V Translation Available**
- **Power Down High-Impedance Inputs/Output**
- **Available in Green SOT-23-5 and SC70-5 Packages**

FUNCTION TABLE


| INPUT | OUTPUT |
|-------|--------|
| A | Y |
| L | H |
| H | L |

$$Y = \bar{A}$$

H = High Voltage Level

L = Low Voltage Level

PIN CONFIGURATIONS

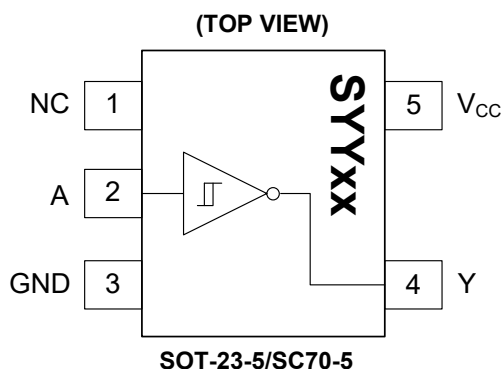

PIN DESCRIPTION

| PIN | NAME | FUNCTION |
|-----|-----------------|---|
| 1 | NC | No Connection. |
| 2 | A | Input. Unused input must be held high or low. It may not float. |
| 3 | GND | Ground. |
| 4 | Y | Output. |
| 5 | V _{CC} | Power Supply. |

ELECTRICAL CHARACTERISTICS

(Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | V _{CC} (V) | MIN | TYP | MAX | UNITS | | | | |
|-------------------------------|------------------|-----------------------------------|---------------------------|------------------|--|-----------------|-------|--|-------|----|----|
| General | | | | | | | | | | | |
| Power Supply Range | V _{CC} | | | 1.65 | | 5.50 | V | | | | |
| Supply Voltage Data Retention | | | | 1.50 | | 5.50 | | | | | |
| Input Voltage | V _{IN} | | | 0.00 | | 5.50 | V | | | | |
| Output Voltage | V _{OUT} | | | 0.00 | | V _{CC} | V | | | | |
| DC Performance | | | | | | | | | | | |
| Positive Threshold Voltage | V _P | | 1.65 | 0.70 | 0.96 | 1.20 | V | | | | |
| | | | 1.80 | 0.75 | 1.04 | 1.30 | | | | | |
| | | | 2.30 | 1.00 | 1.30 | 1.55 | | | | | |
| | | | 3.00 | 1.35 | 1.65 | 1.95 | | | | | |
| | | | 4.50 | 2.05 | 2.40 | 2.70 | | | | | |
| | | | 5.50 | 2.60 | 2.92 | 3.25 | | | | | |
| Negative Threshold Voltage | V _N | | 1.65 | 0.35 | 0.53 | 0.70 | V | | | | |
| | | | 1.80 | 0.40 | 0.57 | 0.75 | | | | | |
| | | | 2.30 | 0.60 | 0.77 | 0.95 | | | | | |
| | | | 3.00 | 0.85 | 1.04 | 1.20 | | | | | |
| | | | 4.50 | 1.35 | 1.56 | 1.75 | | | | | |
| | | | 5.50 | 1.65 | 1.90 | 2.10 | | | | | |
| Hysteresis Voltage | V _H | | 1.65 | 0.10 | 0.43 | 0.70 | V | | | | |
| | | | 1.80 | 0.14 | 0.46 | 0.75 | | | | | |
| | | | 2.30 | 0.18 | 0.52 | 0.80 | | | | | |
| | | | 3.00 | 0.22 | 0.60 | 0.95 | | | | | |
| | | | 4.50 | 0.37 | 0.83 | 1.25 | | | | | |
| | | | 5.50 | 0.60 | 1.02 | 1.40 | | | | | |
| High-Level Output Voltage | V _{OH} | V _{IN} = V _{IL} | I _{OH} = -100μA | 1.65 | 1.62 | 1.65 | V | | | | |
| | | | | 1.80 | 1.77 | 1.80 | | | | | |
| | | | | 2.30 | 2.27 | 2.30 | | | | | |
| | | | | 3.00 | 2.97 | 3.00 | | | | | |
| | | | | 4.50 | 4.47 | 4.50 | | | | | |
| | | | I _{OH} = -4mA | 1.65 | 1.46 | 1.55 | | | | | |
| | | | I _{OH} = -8mA | 2.30 | 2.01 | 2.18 | | | | | |
| | | | I _{OH} = -16mA | 3.00 | 2.49 | 2.81 | | | | | |
| | | | I _{OH} = -24mA | 3.00 | 2.30 | 2.70 | | | | | |
| | | | I _{OH} = -32mA | 4.50 | 3.98 | 4.20 | | | | | |
| Low-Level Output Voltage | V _{OL} | V _{IN} = V _{IH} | I _{OL} = 100μA | 1.65 | | 0.00 | V | | | | |
| | | | | 1.80 | | 0.00 | | | | | |
| | | | | 2.30 | | 0.00 | | | | | |
| | | | | 3.00 | | 0.00 | | | | | |
| | | | | 4.50 | | 0.00 | | | | | |
| | | | I _{OL} = 4mA | 1.65 | | 0.06 | | | | | |
| | | | I _{OL} = 8mA | 2.30 | | 0.09 | | | | | |
| | | | I _{OL} = 16mA | 3.00 | | 0.16 | | | | | |
| | | | I _{OL} = 24mA | 3.00 | | 0.24 | | | | | |
| | | | I _{OL} = 32mA | 4.50 | | 0.29 | | | | | |
| | | | Input Leakage Current | I _{IN} | V _{IN} = 5.5V, GND | 0 to 5.5 | | | ±0.10 | ±5 | μA |
| | | | Power-Off Leakage Current | I _{OFF} | V _{IN} or V _{OUT} = 5.5V | 0 | | | 0.10 | 5 | μA |
| | | | Quiescent Supply Current | I _{CC} | V _{IN} = 5.5V, GND | 1.65 to 5.5 | | | 0.10 | 10 | μA |


ELECTRICAL CHARACTERISTICS (continued)(Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-------------------------------------|---------------------------------|--|---|------|-------|
| AC Performance | | | | | | |
| Propagation Delay | t _{PHL} , t _{PLH} | V _{CC} = 1.65V | C _L = 15pF, R _L = 1MΩ, Figure 1, Figure 2 | | 9.3 | ns |
| | | V _{CC} = 1.80V | | | 7.6 | |
| | | V _{CC} = 2.50V ± 0.20V | | | 4.7 | |
| | | V _{CC} = 3.30V ± 0.30V | | | 3.6 | |
| | | V _{CC} = 5.00V ± 0.50V | | | 2.7 | |
| | | V _{CC} = 3.30V ± 0.30V | | C _L = 50pF, R _L = 500Ω, Figure 1, Figure 2 | | |
| | | V _{CC} = 5.00V ± 0.50V | | | 3.2 | |
| Input Capacitance | C _{IN} | V _{CC} = 0V | | 4.0 | | pF |
| Power Dissipation Capacitance ⁽²⁾ | C _{PD} | V _{CC} = 3.30V | Figure 3 | | 17.0 | pF |
| | | V _{CC} = 5.00V | | | 19.0 | |

NOTES:

- Unused input must be held high or low. It may not float.
- C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle (see Figure 3). C_{PD} is related to dynamic operating current I_{CCD} by the expression: I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC,Static}).

TEST CIRCUITS

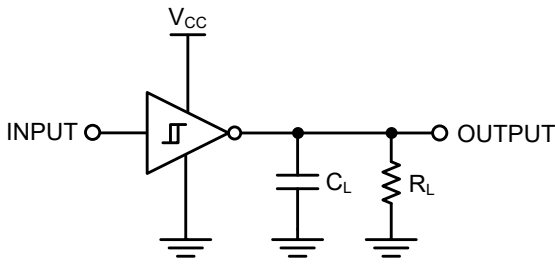

C_L includes load and stray capacitance; Input PRR = 1.0MHz; t_w = 500ns.

Figure 1. AC Test Circuit


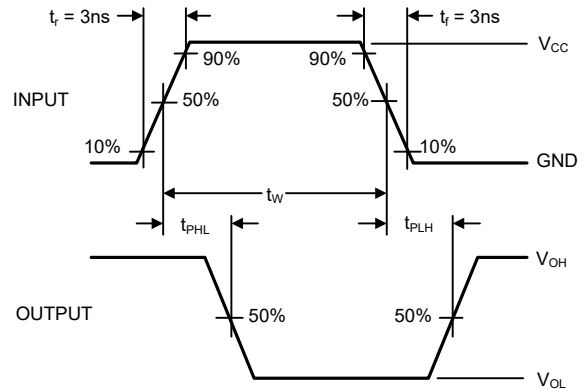


Figure 2. AC Waveforms



Input = AC Waveform; $t_r = t_f = 1.8ns$; PRR = 10MHz; Duty Cycle = 50%.

Figure 3. I_{CCD} Test Circuit



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



| SEPTEMBER 2021 – REV.A.1 to REV.A.2 | Page |
|---|------|
| Updated Package Outline Dimensions section | 8 |
| FEBRUARY 2021 – REV.A to REV.A.1 | Page |
| Changed operating temperature range | All |
| Changes from Original (OCTOBER 2013) to REV.A | Page |
| Changed from product preview to production data | All |

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

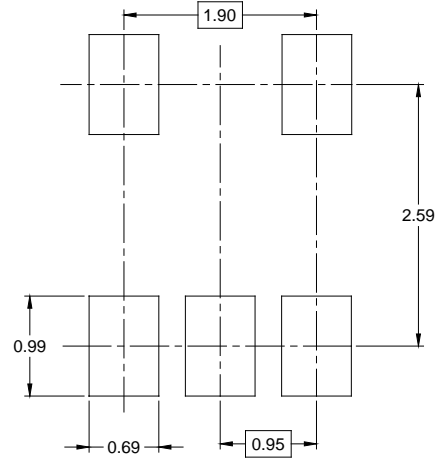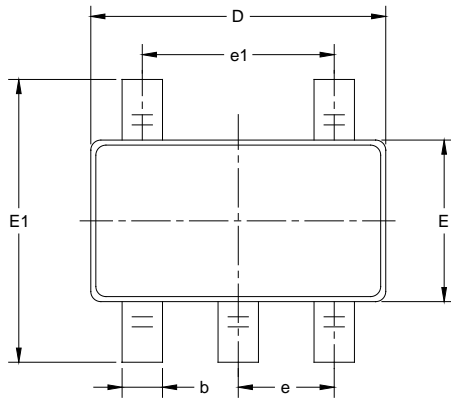

RECOMMENDED LAND PATTERN (Unit: mm)

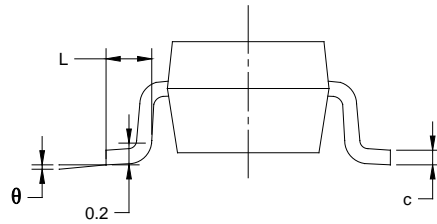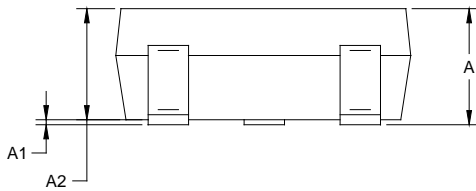


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950 BSC | | 0.037 BSC | |
| e1 | 1.900 BSC | | 0.075 BSC | |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

NOTES:



1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

SC70-5

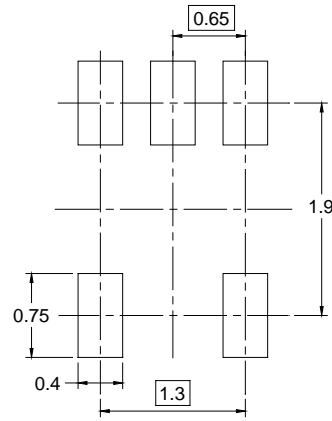

RECOMMENDED LAND PATTERN (Unit: mm)

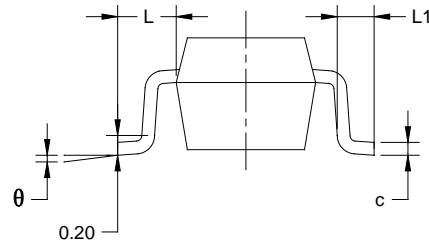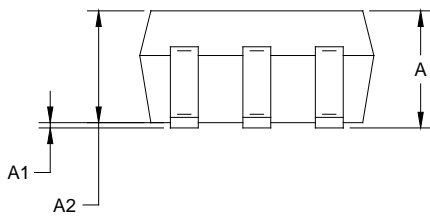

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.800 | 1.100 | 0.031 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.800 | 1.000 | 0.031 | 0.039 |
| b | 0.150 | 0.350 | 0.006 | 0.014 |
| c | 0.080 | 0.220 | 0.003 | 0.009 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.65 TYP | | 0.026 TYP | |
| e1 | 1.300 BSC | | 0.051 BSC | |
| L | 0.525 REF | | 0.021 REF | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |

NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOT-23-5 | 7" | 9.5 | 3.20 | 3.20 | 1.40 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| SC70-5 | 7" | 9.5 | 2.25 | 2.55 | 1.20 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |

DD0002

单击下面可查看定价，库存，交付和生命周期等信息

[>>SGMICRO\(圣邦微电子\)](#)