

### GENERAL DESCRIPTION

The 74LV1T34 is a CMOS logic single buffer level shifter. It operates with a wide voltage range from 1.65V to 5.5V, making it suitable for industrial, portable, and telecommunications applications. Due to the wide power supply voltage range, this device can generate the required output level for connection to the controller or processor.

The input features a low threshold circuit. When the supply voltage is at 3.3V, the input can match 1.8V input logic, allowing a level-up translation from 1.8V to 3.3V. Furthermore, the input pin can tolerate up to 5.5V and support level-down translation. For instance, when the supply voltage is at 2.5V, the output voltage can translate from 3.3V to 2.5V. With a reference to the supply voltage, the CMOS level of output can be at 1.8V, 2.5V, 3.3V and 5.0V.

This device has output driving capability of 8mA that can be used to reduce line reflection, overshoot, and undershoot resulted from high driving output.

The 74LV1T34 is available in Green SC70-5, SOT-23-5 and XTDFN-0.8×0.8-4AL packages. It operates over an ambient temperature range of -40°C to +125°C.


### APPLICATIONS

Industrial Equipment  
Telecom Equipment  
Medical Equipment  
Computing: Server, PC and Notebook

### FEATURES

- **Wide Supply Voltage Range: 1.65V to 5.5V**
- **Input Accepts Voltages up to 5.5V**
- **Single-Supply Voltage Translator at 1.8V, 2.5V, 3.3V and 5.0V**
- **+8mA/-8mA Output Current**
- **Level-Up Translation:**
  - ♦ 1.2V to 1.8V at  $V_{CC} = 1.8V$
  - ♦ 1.5V to 2.5V at  $V_{CC} = 2.5V$
  - ♦ 1.8V to 3.3V at  $V_{CC} = 3.3V$
  - ♦ 3.3V to 5.0V at  $V_{CC} = 5.0V$
- **Level-Down Translation:**
  - ♦ 3.3V to 1.8V at  $V_{CC} = 1.8V$
  - ♦ 3.3V to 2.5V at  $V_{CC} = 2.5V$
  - ♦ 5.0V to 3.3V at  $V_{CC} = 3.3V$
- **Logic Output Refers to Supply Voltage**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green SC70-5, SOT-23-5 and XTDFN-0.8×0.8-4AL Packages**

### LOGIC DIAGRAM



### FUNCTION TABLE

INPUT (Low-Level Input)	OUTPUT ( $V_{CC}$ CMOS)
A	Y
H	H
L	L

H = High Voltage Level

L = Low Voltage Level

## PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
74LV1T34	SC70-5	-40°C to +125°C	74LV1T34XC5G/TR	0C1XX	Tape and Reel, 3000
	SOT-23-5	-40°C to +125°C	74LV1T34XN5G/TR	0C5XX	Tape and Reel, 3000
	XTDFN-0.8×0.8-4AL	-40°C to +125°C	74LV1T34XXGO4G/TR	3X	Tape and Reel, 10000

## MARKING INFORMATION

NOTE: XX = Date Code. X = Date Code.

## SC70-5/SOT-23-5

YYY X X  
 └──┬──┬──  
 Date Code - Week  
 Date Code - Year  
 Serial Number

## XTDFN-0.8×0.8-4AL

Y X  
 └──┬──  
 Date Code - Quarter  
 Serial Number

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

Supply Voltage Range,  $V_{CC}$  ..... -0.5V to 7.0V  
 Input Voltage Range,  $V_I$  <sup>(2)</sup> ..... -0.5V to 7.0V  
 Output Voltage Range,  $V_O$  <sup>(2)</sup> ..... -0.5V to MIN(7.0V,  $V_{CC} + 0.5V$ )  
 Input Clamp Current,  $I_{IK}$  ( $V_I < 0V$ ) ..... -20mA  
 Output Clamp Current,  $I_{OK}$  ( $V_O < 0V$  or  $V_O > V_{CC}$ ) ..... ±20mA  
 Continuous Output Current,  $I_O$  ..... ±25mA  
 Continuous Current through  $V_{CC}$  or GND ..... ±50mA  
 Junction Temperature <sup>(3)</sup> ..... +150°C  
 Storage Temperature Range ..... -65°C to +150°C  
 Lead Temperature (Soldering, 10s) ..... +260°C  
 ESD Susceptibility  
 HBM ..... 6000V  
 CDM ..... 1000V

## RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range,  $V_{CC}$  ..... 1.65V to 5.5V  
 Input Voltage Range,  $V_I$  ..... 0V to 5.5V  
 Output Voltage Range,  $V_O$  ..... 0V to  $V_{CC}$   
 Input Transition Rise or Fall Rate,  $\Delta t/\Delta V$   
 $V_{CC} = 1.8V$  to 5.0V ..... 20ns/V (MAX)  
 Operating Temperature Range ..... -40°C to +125°C

## OVERSTRESS CAUTION

1. Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.
2. The input and output voltage ratings may be exceeded if the input and output clamp current ratings are observed.
3. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.



## ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

## DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

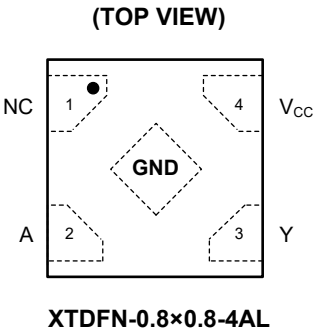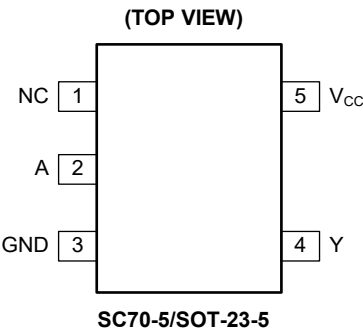

PIN DESCRIPTION

PIN		NAME	FUNCTION
SC70-5/SOT-23-5	XTDFN-0.8x0.8-4AL		
1	1	NC	No Connection.
2	2	A	Data Input.
3	Exposed Pad	GND	Ground.
4	3	Y	Data Output.
5	4	V <sub>CC</sub>	Supply Voltage.

## ELECTRICAL CHARACTERISTICS

(Full = -40°C to +125°C, all typical values are measured at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
High-Level Input Voltage	$V_{IH}$	$V_{CC} = 1.65\text{V to } 1.8\text{V}$	Full	1.00			V
		$V_{CC} = 2.0\text{V}$	Full	1.03			
		$V_{CC} = 2.25\text{V to } 2.5\text{V}$	Full	1.18			
		$V_{CC} = 2.75\text{V}$	Full	1.25			
		$V_{CC} = 3.0\text{V to } 3.3\text{V}$	Full	1.39			
		$V_{CC} = 3.6\text{V}$	Full	1.48			
		$V_{CC} = 4.5\text{V to } 5.0\text{V}$	Full	2.03			
		$V_{CC} = 5.5\text{V}$	Full	2.11			
Low-Level Input Voltage	$V_{IL}$	$V_{CC} = 1.65\text{V to } 2.0\text{V}$	Full			0.55	V
		$V_{CC} = 2.25\text{V to } 2.75\text{V}$	Full			0.65	
		$V_{CC} = 3.0\text{V to } 3.6\text{V}$	Full			0.65	
		$V_{CC} = 4.5\text{V to } 5.5\text{V}$	Full			0.80	
High-Level Output Voltage	$V_{OH}$	$V_{CC} = 1.65\text{V to } 5.5\text{V}, I_{OH} = -20\mu\text{A}$	Full	$V_{CC} - 0.1$	$V_{CC} - 0.01$		V
		$V_{CC} = 1.65\text{V}, I_{OH} = -2\text{mA}$	Full	1.21	1.53		
		$V_{CC} = 1.8\text{V}, I_{OH} = -2\text{mA}$	Full	1.45	1.70		
		$V_{CC} = 2.3\text{V}, I_{OH} = -3\text{mA}$	Full	1.93	2.19		
		$V_{CC} = 2.5\text{V}, I_{OH} = -3\text{mA}$	Full	2.15	2.40		
		$V_{CC} = 3.0\text{V}, I_{OH} = -3\text{mA}$	Full	2.70	2.92		
		$V_{CC} = 3.0\text{V}, I_{OH} = -5.5\text{mA}$	Full	2.49	2.85		
		$V_{CC} = 3.3\text{V}, I_{OH} = -5.5\text{mA}$	Full	2.80	3.17		
		$V_{CC} = 4.5\text{V}, I_{OH} = -4\text{mA}$	Full	4.10	4.42		
		$V_{CC} = 4.5\text{V}, I_{OH} = -8\text{mA}$	Full	3.95	4.35		
		$V_{CC} = 5.0\text{V}, I_{OH} = -8\text{mA}$	Full	4.50	4.86		
Low-Level Output Voltage	$V_{OL}$	$V_{CC} = 1.65\text{V to } 5.5\text{V}, I_{OL} = 20\mu\text{A}$	Full		0.01	0.10	V
		$V_{CC} = 1.65\text{V}, I_{OL} = 2\text{mA}$	Full		0.07	0.25	
		$V_{CC} = 2.3\text{V}, I_{OL} = 3\text{mA}$	Full		0.07	0.20	
		$V_{CC} = 3.0\text{V}, I_{OL} = 3\text{mA}$	Full		0.06	0.15	
		$V_{CC} = 3.0\text{V}, I_{OL} = 5.5\text{mA}$	Full		0.11	0.25	
		$V_{CC} = 4.5\text{V}, I_{OL} = 4\text{mA}$	Full		0.06	0.20	
		$V_{CC} = 4.5\text{V}, I_{OL} = 8\text{mA}$	Full		0.12	0.35	
Input Leakage Current	$I_I$	A input, $V_{CC} = 0\text{V}, 1.8\text{V}, 2.5\text{V}, 3.3\text{V}, 5.5\text{V}$ , $V_I = V_{CC}$ or GND	Full		$\pm 0.01$	$\pm 1$	$\mu\text{A}$
Supply Current	$I_{CC}$	$V_{CC} = 1.8\text{V to } 5.5\text{V}, V_I = V_{CC}$ or GND, $I_O = 0\text{A}$	Full		0.01	5	$\mu\text{A}$
Additional Supply Current	$\Delta I_{CC}$	One input at 0.3V or 1.1V, other inputs at $V_{CC}$ or GND, $V_{CC} = 1.8\text{V}, I_O = 0\text{A}$	Full		0.05	5	$\mu\text{A}$
		One input at 0.3V or 3.4V, other inputs at $V_{CC}$ or GND, $V_{CC} = 5.5\text{V}, I_O = 0\text{A}$	Full		0.30	1	$\text{mA}$
Input Capacitance	$C_I$	$V_{CC} = 3.3\text{V}, V_I = V_{CC}$ or GND	+25°C		4		$\text{pF}$
Output Capacitance	$C_O$	$V_{CC} = 3.3\text{V}, V_O = V_{CC}$ or GND	+25°C		6		$\text{pF}$

**DYNAMIC CHARACTERISTICS**

(See Figure 1 for test circuit. Full = -40°C to +125°C, all typical values are measured at T<sub>A</sub> = +25°C and V<sub>CC</sub> = 1.8V, 2.5V, 3.3V and 5.0V respectively, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	UNITS
Propagation Delay <sup>(2)</sup>	t <sub>PD</sub>	A to Y, see Figure 2	V <sub>CC</sub> = 1.8V, C <sub>L</sub> = 15pF	Full	0.5	7.5	ns
			V <sub>CC</sub> = 1.8V, C <sub>L</sub> = 30pF	Full	0.5	8.5	
			V <sub>CC</sub> = 2.5V, C <sub>L</sub> = 15pF	Full	0.5	5.5	
			V <sub>CC</sub> = 2.5V, C <sub>L</sub> = 30pF	Full	0.5	6.5	
			V <sub>CC</sub> = 3.3V, C <sub>L</sub> = 15pF	Full	0.5	5.0	
			V <sub>CC</sub> = 3.3V, C <sub>L</sub> = 30pF	Full	0.5	6.0	
			V <sub>CC</sub> = 5.0V, C <sub>L</sub> = 15pF	Full	0.5	5.0	
			V <sub>CC</sub> = 5.0V, C <sub>L</sub> = 30pF	Full	0.5	6.0	
Power Dissipation Capacitance <sup>(3)</sup>	C <sub>PD</sub>	f = 1MHz and 10MHz	V <sub>CC</sub> = 1.8V ± 0.15V	+25°C		14.0	pF
			V <sub>CC</sub> = 2.5V ± 0.2V	+25°C		14.0	
			V <sub>CC</sub> = 3.3V ± 0.3V	+25°C		15.0	
			V <sub>CC</sub> = 5.0V ± 0.5V	+25°C		17.0	

**NOTES:**

- Specified by design and characterization, not production tested.
- t<sub>PD</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>.
- C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$$

where:

f<sub>i</sub> = Input frequency in MHz.

f<sub>o</sub> = Output frequency in MHz.


C<sub>L</sub> = Output load capacitance in pF.

V<sub>CC</sub> = Supply voltage in Volts.

N = Number of inputs switching.

Σ(C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = Sum of outputs.

TEST CIRCUIT

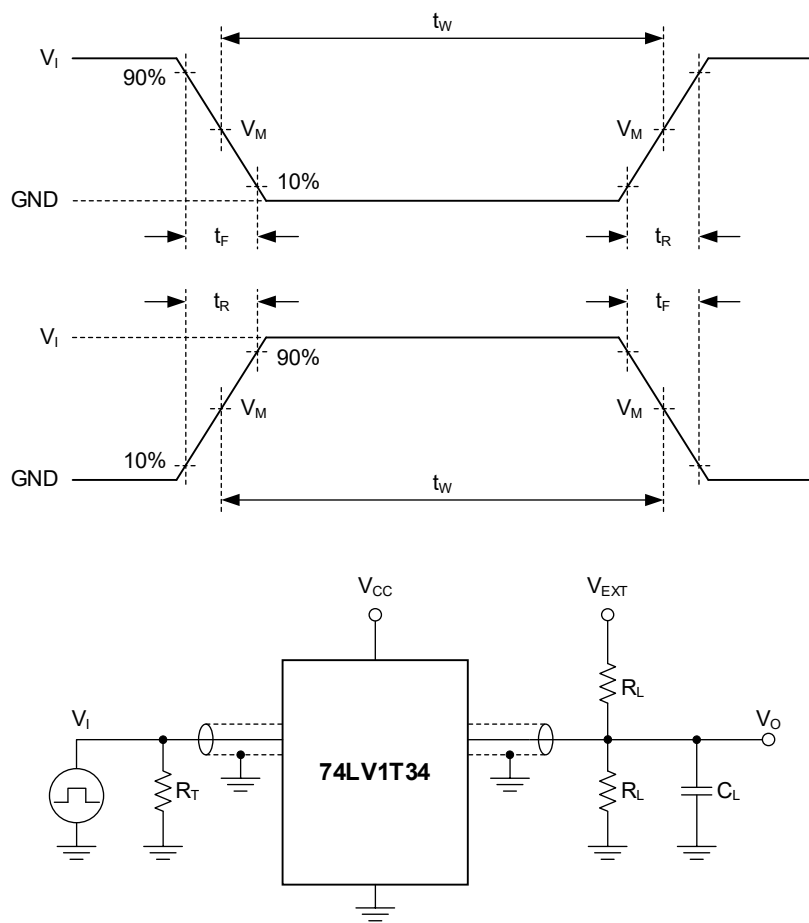


Test conditions are given in Table 1.  
Definitions for test circuit:  
 $R_L$ : Load resistance.  
 $C_L$ : Load capacitance (includes jig and probe).  
 $R_T$ : Termination resistance (equals to output impedance  $Z_O$  of the pulse generator).  
 $V_{EXT}$ : External voltage is used to measure switching time.

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

SUPPLY VOLTAGE	INPUT			LOAD		$V_{EXT}$
$V_{CC}$	$V_I$	$t_R, t_F$	$f_{MAX}$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$
$1.8V \pm 0.15V$	$V_{CC}$	$\leq 1.0ns$	15MHz	15pF, 30pF	1M $\Omega$	GND
$2.5V \pm 0.2V$	$V_{CC}$	$\leq 1.0ns$	25MHz	15pF, 30pF	1M $\Omega$	GND
$3.3V \pm 0.3V$	$V_{CC}$	$\leq 1.0ns$	50MHz	15pF, 30pF	1M $\Omega$	GND
$5.0V \pm 0.5V$	$V_{CC}$	$\leq 1.0ns$	50MHz	15pF, 30pF	1M $\Omega$	GND

WAVEFORMS

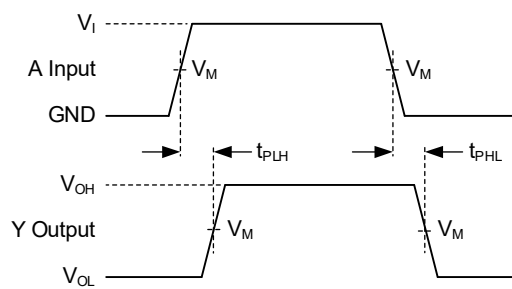

Test conditions are given in Table 1.  
Measurement points are given in Table 2.  
Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

Figure 2. Input A to Output Y Propagation Delay Times

Table 2. Measurement Points

INPUT	OUTPUT
$V_M^{(1)}$	$V_M$
$0.5 \times V_{CC}$	$0.5 \times V_{CC}$

NOTE:  
1. The measurement points should be  $V_{IH}$  or  $V_{IL}$  when the input rising or falling time exceeds 1.0ns.



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



MARCH 2024 – REV.A to REV.A.1	Page
Added XTDFN-0.8×0.8-4AL package .....	All
Changes from Original (DECEMBER 2023) to REV.A	Page
Changed from product preview to production data.....	All

## PACKAGE OUTLINE DIMENSIONS

### SC70-5

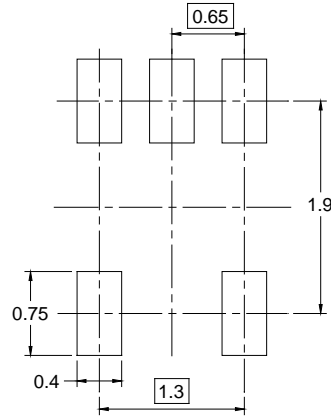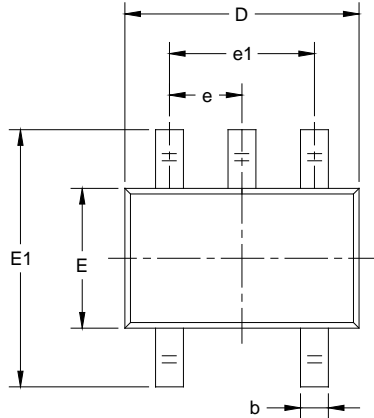

RECOMMENDED LAND PATTERN (Unit: mm)

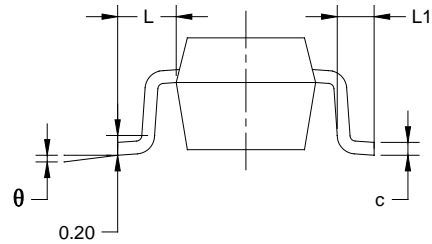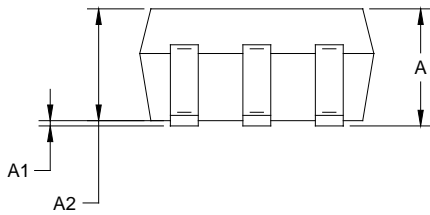



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.220	0.003	0.009
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

#### NOTES:



1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

## PACKAGE OUTLINE DIMENSIONS

### SOT-23-5

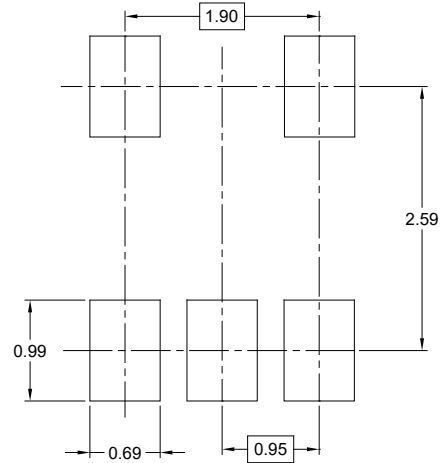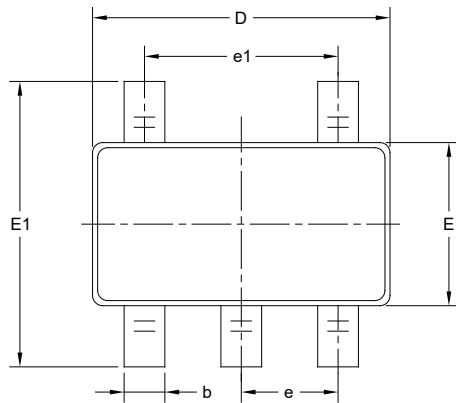

RECOMMENDED LAND PATTERN (Unit: mm)

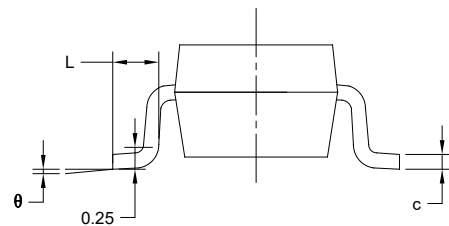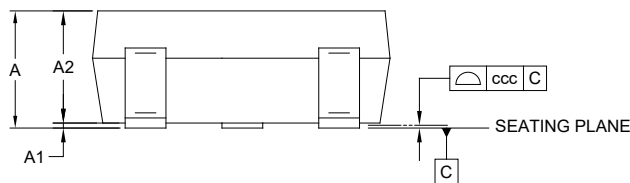


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
$\theta$	0°	-	8°
ccc	0.100		

#### NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

## PACKAGE OUTLINE DIMENSIONS


### XTDFN-0.8×0.8-4AL

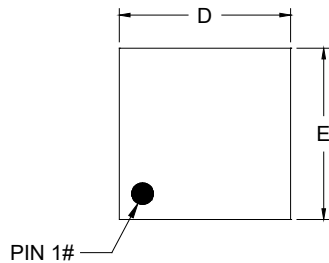


TOP VIEW

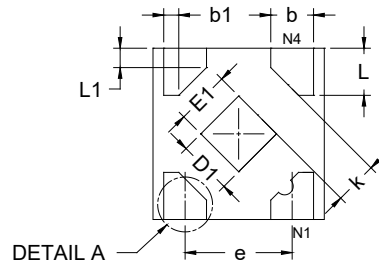


BOTTOM VIEW

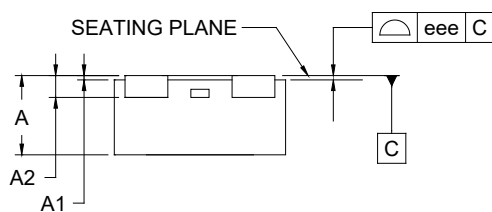

SIDE VIEW



DETAIL A  
ALTERNATE TERMINAL  
CONSTRUCTION

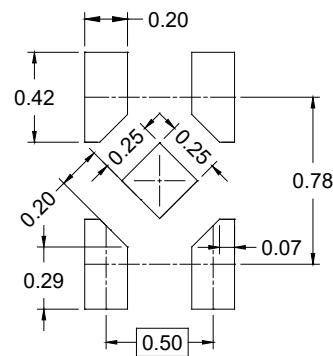

RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.320	-	0.400
A1	0.000	-	0.050
A2	0.102 REF		
b	0.150	-	0.250
b1	0.070 REF		
D	0.700	-	0.900
E	0.700	-	0.900
D1	0.150	-	0.350
E1	0.150	-	0.350
L	0.170	-	0.270
L1	0.090 REF		
e	0.500 BSC		
k	0.200 REF		
eee	0.050		

NOTE: This drawing is subject to change without notice.


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

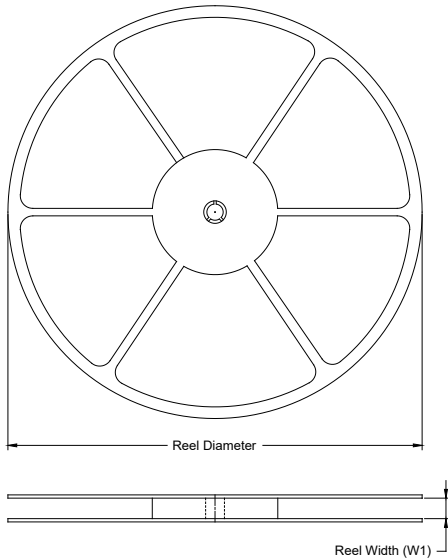

### TAPE DIMENSIONS

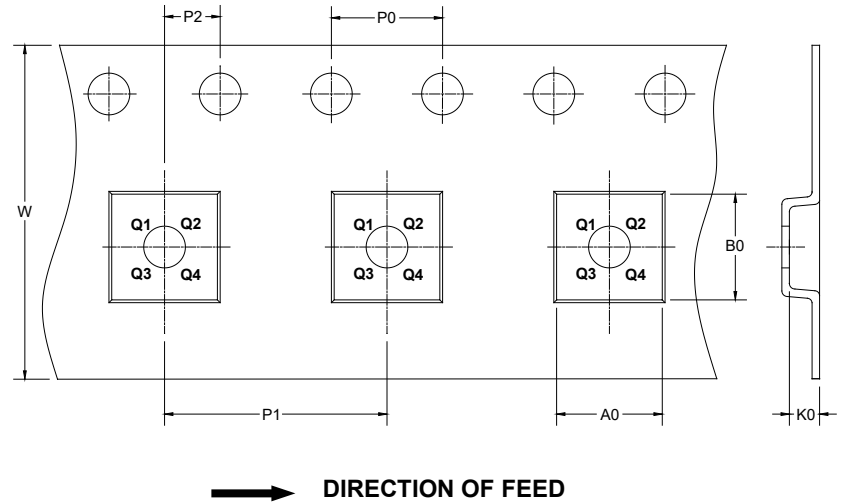

NOTE: The picture is only for reference. Please make the object as the standard.


### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SC70-5	7"	9.5	2.40	2.50	1.20	4.0	4.0	2.0	8.0	Q3
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
XTDFN-0.8×0.8-4AL	7"	9.5	0.94	0.94	0.50	4.0	2.0	2.0	8.0	Q3

DD0001

## PACKAGE INFORMATION

### CARTON BOX DIMENSIONS

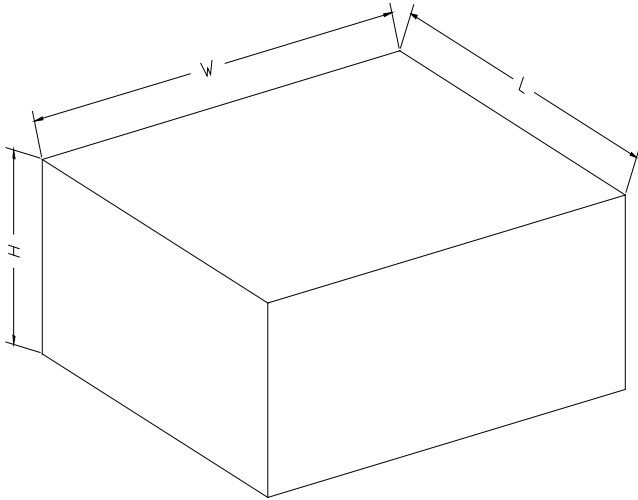

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002

单击下面可查看定价，库存，交付和生命周期等信息

[>>SGMICRO\(圣邦微电子\)](#)