



SGM3001/SGM3002

Low On-Resistance, Low Voltage, SPDT Analog Switch

GENERAL DESCRIPTION

The SGM3001 (single) and SGM3002 (dual) are bidirectional SPDT (single-pole/double-throw), TTL/CMOS compatible analog switches. They both operate from a 1.8V to 5.5V single power supply.

The SGM3001 and SGM3002 feature low on-resistance, low voltage and fast switching times. The high performances make them very suitable for multiple applications, such as portable equipment, audio and video signal routing, etc. In addition, the SGM3002 can be used as a dual 2-to-1 multiplexer because it has two normally open and two normally close switches. Low power consumption is also one of the important reasons that make it a good choice.

The single version SGM3001 is available in a Green SC70-6 package. The dual version SGM3002 is available in a Green MSOP-10 package. They both operate over an ambient temperature range of -40°C to +125°C.

FEATURES

- Single Supply Voltage Range: 1.8V to 5.5V
- -3dB Bandwidth: 120MHz
- Low On-Resistance: 2.5Ω (TYP)
- Low On-Resistance Flatness
- Low Crosstalk: -35dB (TYP) at 10MHz (SGM3002)
- Fast Switching Times:
 - t_{ON} : 11ns
 - t_{OFF} : 30ns (SGM3001)
 - t_{OFF} : 8ns (SGM3002)
- Off-Isolation: -45dB at 10MHz
- Low Power Consumption
- Rail-to-Rail Input and Output Operation
- TTL/CMOS Compatible
- -40°C to +125°C Operating Temperature Range
- SGM3001: Available in a Green SC70-6 Package
- SGM3002: Available in a Green MSOP-10 Package

APPLICATIONS

Cellular Phones
Portable Equipment
Medical Equipment
Sample-and-Hold Circuits
Personal Digital Assistants
Battery-Powered Systems
Audio and Video Signal Routing

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM3001	SC70-6	-40°C to +125°C	SGM3001XC6/TR	3001	Tape and Reel, 3000
SGM3002	MSOP-10	-40°C to +125°C	SGM3002XMS/TR	SGM3002 XMS XXXXX	Tape and Reel, 3000

NOTE: XXXXX = Date Code and Vendor Code.

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

V ₊ to GND	-0.3V to 6V
Analog, Digital Voltage Range ⁽¹⁾	-0.3V to (V ₊) + 0.3V
Continuous Current NO, NC, or COM	±150mA
Peak Current NO, NC, or COM	±250mA
Package Thermal Resistance @ T _A = +25°C	
SC70-6, θ _{JA}	333°C/W
MSOP-10, θ _{JA}	205°C/W
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM	2000V
MM	400V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range

NOTE:

1. Signals on NC, NO, or COM or IN exceeding V₊ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

OVERSTRESS CAUTION


Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

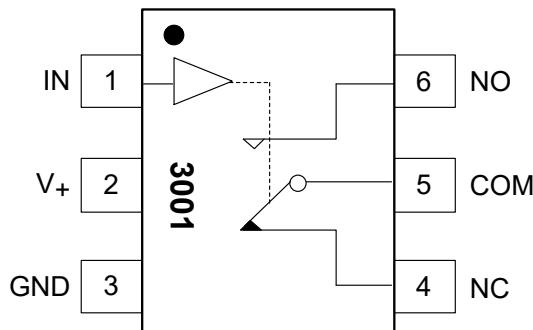PIN CONFIGURATIONS**SGM3001 (TOP VIEW)**

SC70-6

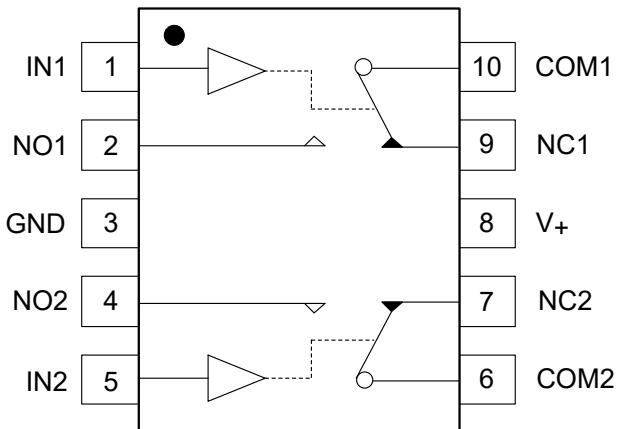SGM3002 (TOP VIEW)

MSOP-10

PIN DESCRIPTION

PIN		NAME	FUNCTION
SC70-6	MSOP-10		
1	1, 5	IN (IN1, IN2)	Digital Control Input Pin to Connect the COM Pins to the NO or NC Pins.
2	8	V ₊	Positive Power Supply Pin.
3	3	GND	Ground.
4	7, 9	NC (NC1, NC2)	Normally Closed Pins.
5	6, 10	COM (COM1, COM2)	Common Pins.
6	2, 4	NO (NO1, NO2)	Normally Open Pins.

NOTE: NO, NC and COM pins may be an input or output.

FUNCTION TABLE

LOGIC	NO, NO1, NO2	NC, NC1, NC2
0	OFF	ON
1	ON	OFF

SGM3001/SGM3002

Low On-Resistance, Low Voltage, SPDT Analog Switch

ELECTRICAL CHARACTERISTICS

($V_+ = 5V \pm 10\%$, GND = 0V, Full = -40°C to +125°C. Typical values are at $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	SGM3001/SGM3002			
			+25°C	-40°C to +125°C	UNITS	MIN/MAX
Analog Switch						
Analog Signal Range	V_{NO}, V_{NC}, V_{COM}			0	V	MIN
				V_+	V	MAX
On-Resistance	R_{ON}	$0 \leq V_{NO} \text{ or } V_{NC} \leq V_+, I_{COM} = -10mA$, Test Circuit 1	2.5		Ω	TYP
			3.7	4.5	Ω	MAX
On-Resistance Match between Channels	ΔR_{ON}	$0 \leq V_{NO} \text{ or } V_{NC} \leq V_+, I_{COM} = -10mA$, Test Circuit 1	0.1		Ω	TYP
			0.8	0.9	Ω	MAX
On-Resistance Flatness	$R_{FLAT(ON)}$	$0 \leq V_{NO} \text{ or } V_{NC} \leq V_+, I_{COM} = -10mA$, Test Circuit 1	0.75		Ω	TYP
			0.85	0.9	Ω	MAX
Leakage Currents						
Source Off Leakage Current	$I_{NC(OFF)}, I_{NO(OFF)}$	$V_{NO} \text{ or } V_{NC} = 4.5V/1V, V_{COM} = 1V/4.5V$, $V_+ = 5.5V$, Test Circuit 2	± 5		nA	TYP
			± 11	± 1000	nA	MAX
Channel On Leakage Current	$I_{NC(ON)}, I_{NO(ON)}, I_{COM(ON)}$	$V_{NO} \text{ or } V_{NC} = V_{COM} = 1V \text{ or } 4.5V$, $V_+ = 5.5V$, Test Circuit 3	± 5		nA	TYP
			± 11	± 1000	nA	MAX
Digital Inputs						
Input High Voltage	V_{INH}			2.4	V	MIN
Input Low Voltage	V_{INL}			0.8	V	MAX
Input Current	$I_{INL} \text{ or } I_{INH}$	$V_{IN} = V_{INH} \text{ or } V_{INL}$	± 0.01		μA	TYP
			± 0.1	± 1	μA	MAX
Dynamic Characteristics						
Turn-On Time	t_{ON}	$V_{NO} \text{ or } V_{NC} = 3V, R_L = 300\Omega, C_L = 35pF$, Test Circuit 4	11		ns	TYP
Turn-Off Time	t_{OFF}	$V_{NO} \text{ or } V_{NC} = 3V, R_L = 300\Omega, C_L = 35pF$, Test Circuit 4	30		ns	TYP
			8		ns	TYP
Charge Injection	Q	$C_L = 1.0nF, V_S = 0V, R_S = 0\Omega$, Test Circuit 5	3		pC	TYP
Break-Before-Make Time Delay	t_D	$V_{NO1} \text{ or } V_{NC1} = V_{NO2} \text{ or } V_{NC2} = 3V, R_L = 300\Omega, C_L = 35pF$, Test Circuit 6	10		ns	TYP
Off Isolation	O_{ISO}	$R_L = 50\Omega, C_L = 5pF$, Test Circuit 7	$f = 10MHz$	-45		TYP
			$f = 1MHz$	-65		TYP
Channel-to-Channel Crosstalk (SGM3002 Only)	X_{TALK}	$R_L = 50\Omega, C_L = 5pF$, Test Circuit 8	$f = 10MHz$	-35		TYP
			$f = 1MHz$	-55		TYP
Total Harmonic Distortion	THD	$f = 20Hz \text{ to } 20kHz, V_{COM} = 3.5V_{P-P}$, $R_L = 600\Omega, C_L = 50pF$	0.006		%	TYP
-3dB Bandwidth	BW	$R_L = 50\Omega, C_L = 5pF$, Test Circuit 9	120		MHz	TYP
Source Off Capacitance	$C_{NC(OFF)}, C_{NO(OFF)}$			14	μF	TYP
Channel On Capacitance	$C_{NC(ON)}, C_{NO(ON)}, C_{COM(ON)}$			53	μF	TYP
Power Requirements						
Power Supply Current	I_+	$V_+ = 5.5V, V_{IN} = 0V \text{ or } 5V$	0.001		μA	TYP
				1	μA	MAX




SGM3001/SGM3002

Low On-Resistance, Low Voltage, SPDT Analog Switch


ELECTRICAL CHARACTERISTICS (continued)

($V_+ = 3V \pm 10\%$, GND = 0V, Full = -40°C to +125°C. Typical values are at $T_A = +25^\circ C$, unless otherwise noted.)


PARAMETER	SYMBOL	CONDITIONS	SGM3001/SGM3002			
			+25°C	-40°C to +125°C	UNITS	MIN/MAX
Analog Switch						
Analog Signal Range	V_{NO}, V_{NC}, V_{COM}			0	V	MIN
				V_+	V	MAX
On-Resistance	R_{ON}	$0 \leq V_{NO} \text{ or } V_{NC} \leq V_+, I_{COM} = -10mA$, Test Circuit 1	2.9	3	Ω	TYP
			4.4	6	Ω	MAX
On-Resistance Match between Channels	ΔR_{ON}	$0 \leq V_{NO} \text{ or } V_{NC} \leq V_+, I_{COM} = -10mA$, Test Circuit 1	0.1		Ω	TYP
			0.8	0.9	Ω	MAX
On-Resistance Flatness	$R_{FLAT(ON)}$	$0 \leq V_{NO} \text{ or } V_{NC} \leq V_+, I_{COM} = -10mA$, Test Circuit 1	0.9		Ω	TYP
			1	1.2	Ω	MAX
Leakage Currents						
Source Off Leakage Current	$I_{NC(OFF)}, I_{NO(OFF)}$	$V_{NO} \text{ or } V_{NC} = 3V/1V, V_{COM} = 1V/3V$, $V_+ = 3.3V$, Test Circuit 2	± 7		nA	TYP
			± 13	± 1000	nA	MAX
Channel On Leakage Current	$I_{NC(ON)}, I_{NO(ON)}$, $I_{COM(ON)}$	$V_{NO} \text{ or } V_{NC} = V_{COM} = 1V \text{ or } 3V$, $V_+ = 3.3V$, Test Circuit 3	± 7		nA	TYP
			± 13	1000	nA	MAX
Digital Inputs						
Input High Voltage	V_{INH}			2.0	V	MIN
Input Low Voltage	V_{INL}			0.4	V	MAX
Input Current	$I_{INL} \text{ or } I_{INH}$	$V_{IN} = V_{INH} \text{ or } V_{INL}$	± 0.01		μA	TYP
			± 0.1	± 1	μA	MAX
Dynamic Characteristics						
Turn-On Time	t_{ON}	$V_{NO} \text{ or } V_{NC} = 2V, R_L = 300\Omega$, $C_L = 35pF$, Test Circuit 4	12		ns	TYP
Turn-Off Time	t_{OFF}	$V_{NO} \text{ or } V_{NC} = 2V, R_L = 300\Omega$, $C_L = 35pF$, Test Circuit 4	31		ns	TYP
			9		ns	TYP
Charge Injection	Q	$C_L = 1.0nF, V_S = 0V, R_S = 0\Omega$, Test Circuit 5	3		pC	TYP
Break-Before-Make Time Delay	t_D	$V_{NO1} \text{ or } V_{NC1} = V_{NO2} \text{ or } V_{NC2} = 2V$, $R_L = 300\Omega, C_L = 35pF$, Test Circuit 6	11		ns	TYP
Off Isolation	O_{ISO}	$R_L = 50\Omega, C_L = 5pF$, Test Circuit 7	$f = 10MHz$	-45		TYP
			$f = 1MHz$	-65		TYP
Channel-to-Channel Crosstalk (SGM3002 Only)	X_{TALK}	$R_L = 50\Omega, C_L = 5pF$, Test Circuit 8	$f = 10MHz$	-35		TYP
			$f = 1MHz$	-55		TYP
Total Harmonic Distortion	THD	$f = 20Hz \text{ to } 20kHz, V_{COM} = 2V_{P-P}$, $R_L = 600\Omega, C_L = 50pF$	0.005		%	TYP
-3dB Bandwidth	BW	$R_L = 50\Omega, C_L = 5pF$, Test Circuit 9	120		MHz	TYP
Source Off Capacitance	$C_{NC(OFF)}, C_{NO(OFF)}$			14	pF	TYP
Channel On Capacitance	$C_{NC(ON)}, C_{NO(ON)}$, $C_{COM(ON)}$			53	pF	TYP
Power Requirements						
Power Supply Current	I_+	$V_+ = 3.3V, V_{IN} = 0V \text{ or } 3V$	0.001		μA	TYP
				1	μA	MAX

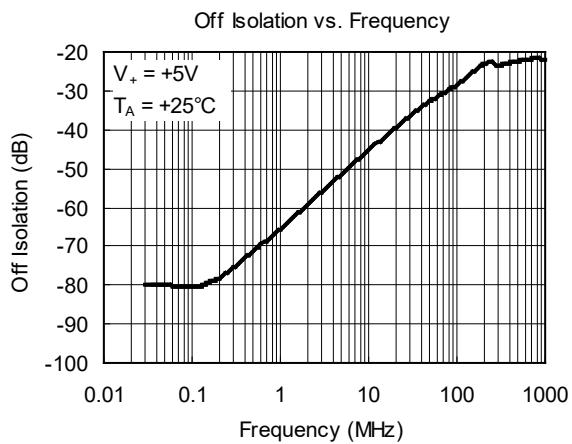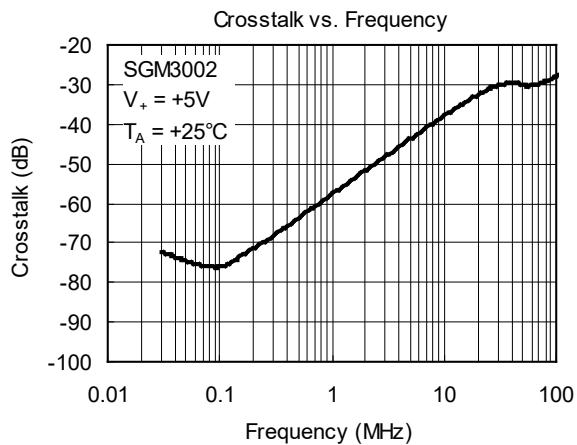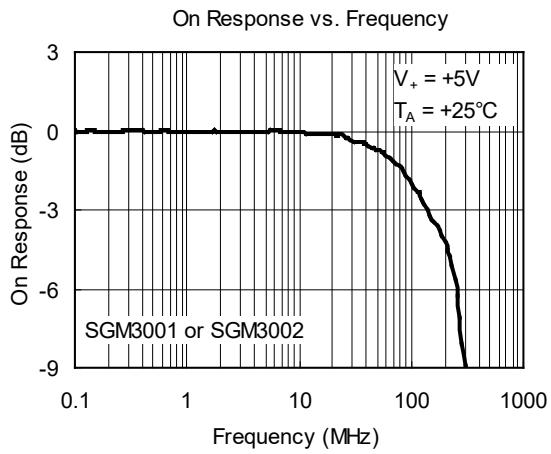TYPICAL PERFORMANCE CHARACTERISTICS


TEST CIRCUITS

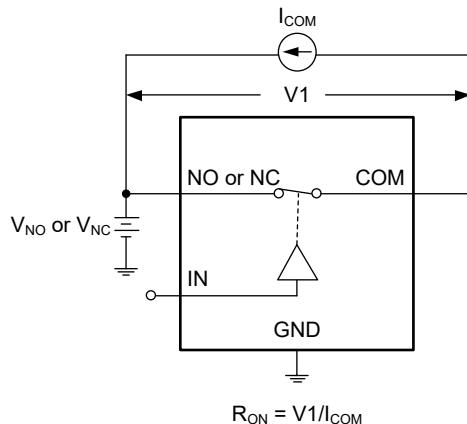


Test Circuit 1. On-Resistance

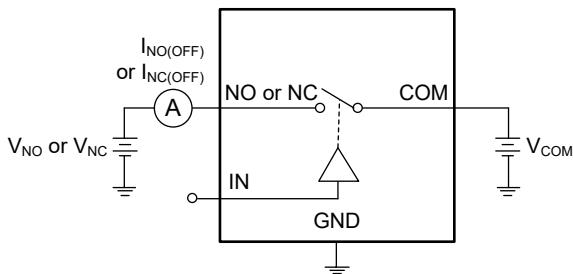


Test Circuit 2. Off Leakage

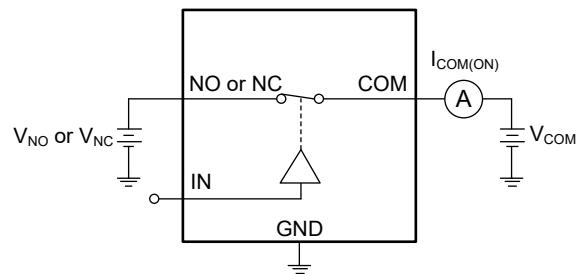


Test Circuit 3. On Leakage

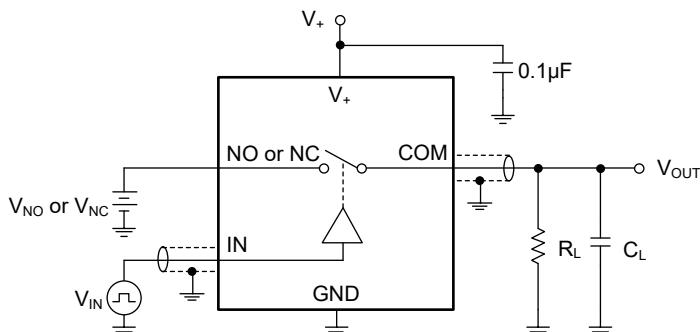



Test Circuit 4. Switching Times

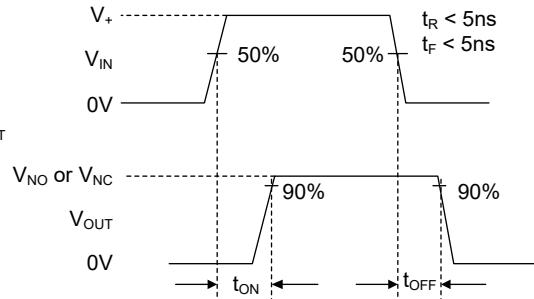

TEST CIRCUITS (continued)

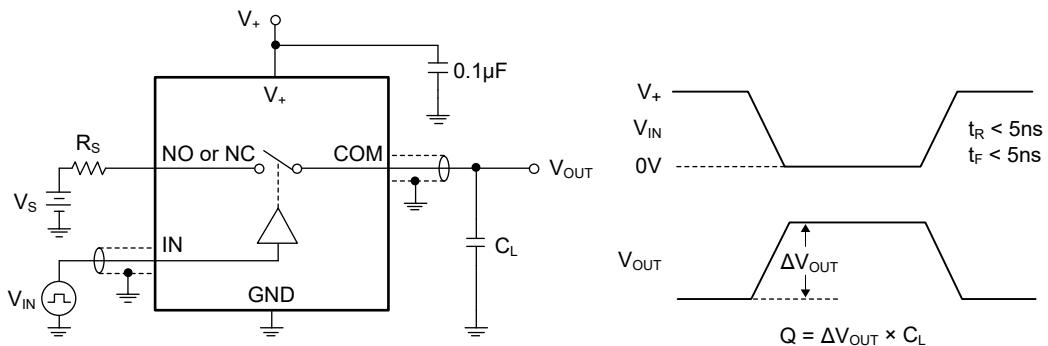


Test Circuit 5. Charge Injection

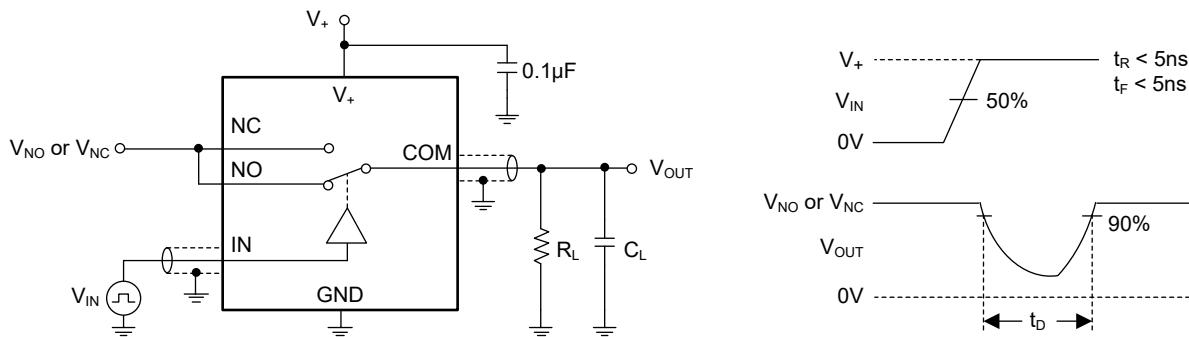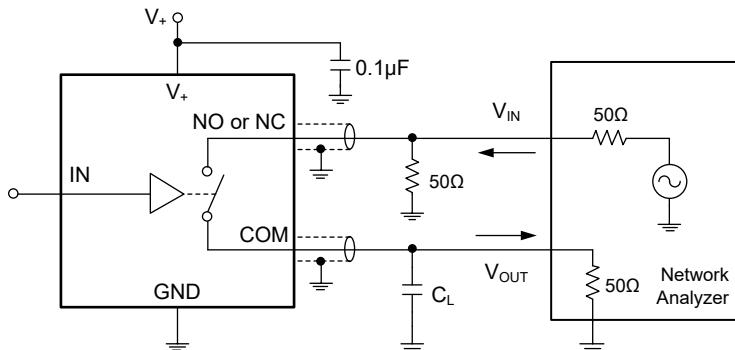Test Circuit 6. Break-Before-Make Time Delay, t_D 


Test Circuit 7. Off Isolation

TEST CIRCUITS (continued)

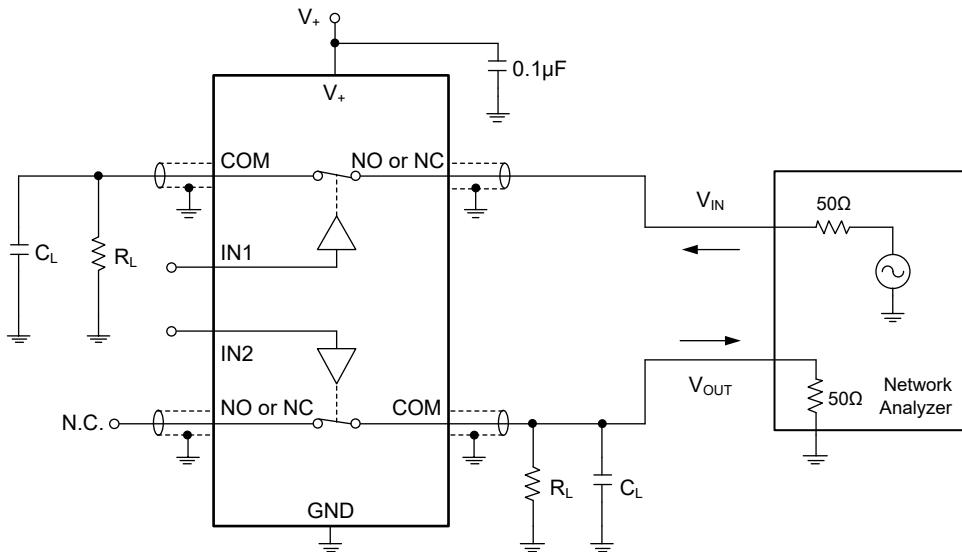

Channel-to-Channel Crosstalk = $-20 \log (V_{NO} \text{ or } V_{NC}/V_{OUT})$

Test Circuit 8. Channel-to-Channel Crosstalk


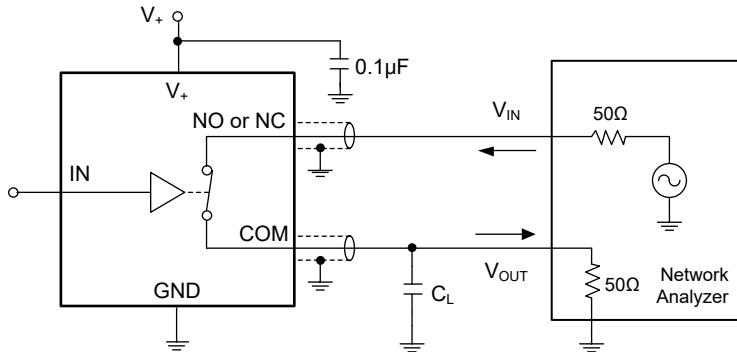


Test Circuit 9. -3dB Bandwidth



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SC70-6

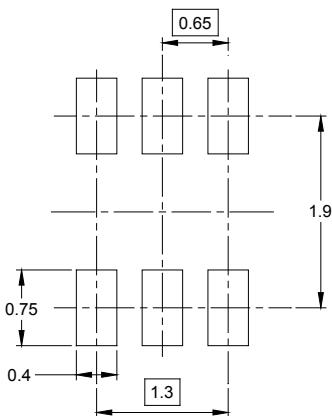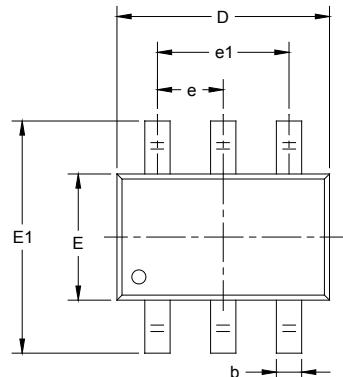

RECOMMENDED LAND PATTERN (Unit: mm)

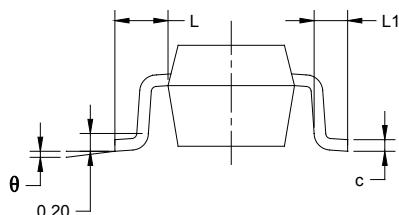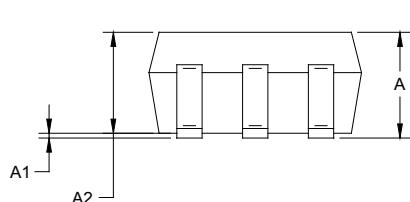


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°


PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

MSOP-10

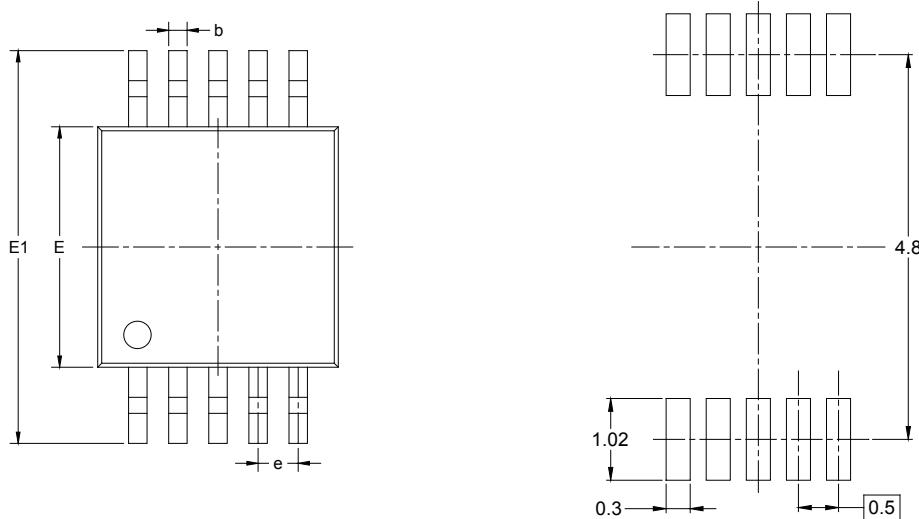

RECOMMENDED LAND PATTERN (Unit: mm)

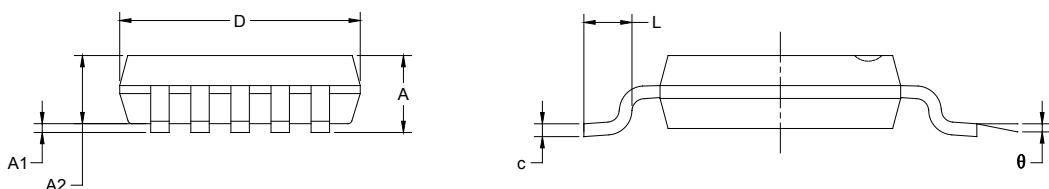


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.280	0.007	0.011
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.500 BSC		0.020 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

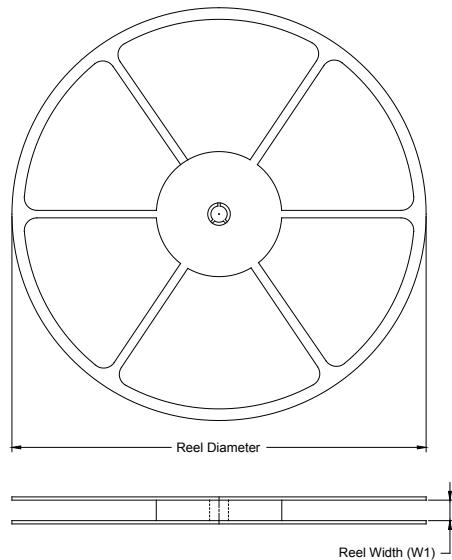

TAPE DIMENSIONS

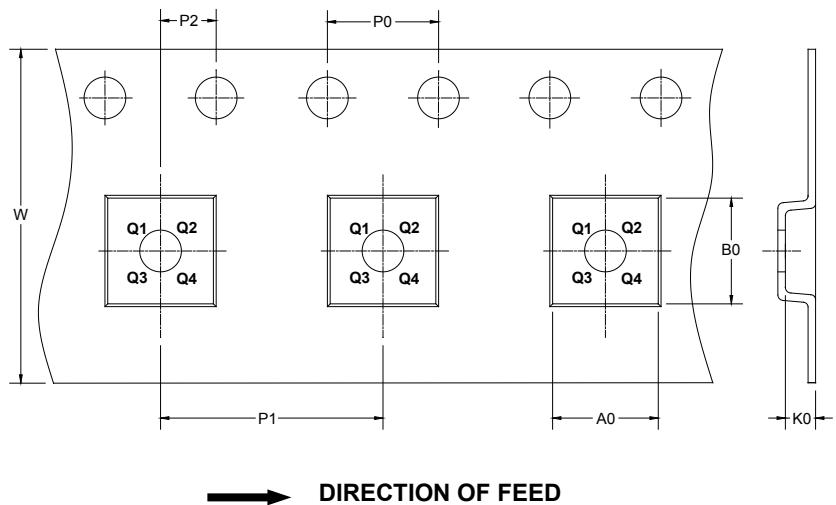

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SC70-6	7"	9.5	2.40	2.50	1.20	4.0	4.0	2.0	8.0	Q3
MSOP-10	13"	12.4	5.20	3.30	1.20	4.0	8.0	2.0	12.0	Q1

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18
13"	386	280	370	5

DD0002

单击下面可查看定价，库存，交付和生命周期等信息

[>>SGMICRO\(圣邦微电子\)](#)