

### GENERAL DESCRIPTION

The SGM9132 is a 3-channel, 6th-order output reconstruction filter which can operate from 3.1V to 5.5V single power supply. It is designed to replace passive LC filters and drivers with an integrated device. Three channels are High Definition (HDp) filters.

The device allows DC- or AC-coupled output. SGM9132 can be DC-coupled or AC-coupled with input video signal to eliminate out-of-band noise, such as the output stage of DAC. Internal bias circuitry may be used for providing constant bias voltage if AC-coupled inputs are required.

The SGM9132 is available in a Green SOIC-8 (Exposed Pad) package. It operates over an ambient temperature range of -40°C to +85°C.


### FEATURES

- **Supply Voltage Range: 3.1V to 5.5V**
- **Three 6th-Order 1080p High Definition Filters**
- **Bias Mode Active with AC-Coupled Inputs**
- **Bias Mode Inactive with DC-Coupled Inputs**
- **AC- or DC-Coupled Outputs**
- **DC-Coupled Outputs Eliminate AC-Coupled Capacitors**
- **-40°C to +85°C Operating Temperature Range**
- **Available in a Green SOIC-8 (Exposed Pad) Package**

### APPLICATIONS

- Video Amplifiers
- Video Recorders
- Video on Demand (VOD)
- Cable and Satellite Set-Top Boxes
- Portable and Handheld Products
- Communication Devices
- TVs

### BLOCK DIAGRAM

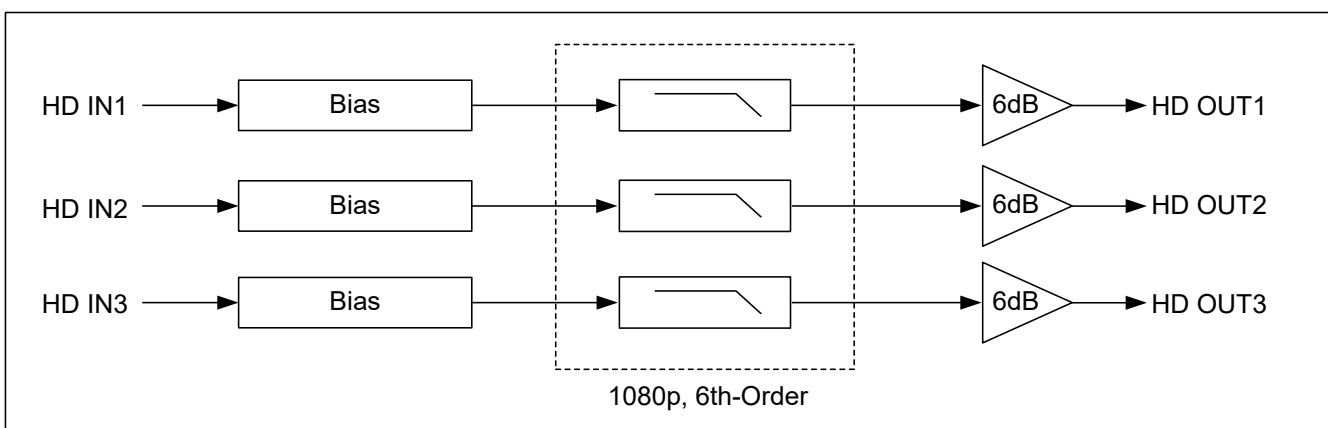


**PACKAGE/ORDERING INFORMATION**

| MODEL   | PACKAGE DESCRIPTION     | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING      | PACKING OPTION      |
|---------|-------------------------|-----------------------------|-----------------|----------------------|---------------------|
| SGM9132 | SOIC-8<br>(Exposed Pad) | -40°C to +85°C              | SGM9132YPS8G/TR | SGM9132YPS8<br>XXXXX | Tape and Reel, 2500 |

**MARKING INFORMATION**

NOTE: XXXXX = Date Code and Vendor Code.

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

|   |                                      |
|---|--------------------------------------|
| Input Voltage.....                      | GND - 0.3V to V <sub>CC</sub> + 0.3V |
| Supply Voltage, V <sub>CC</sub> .....   | 6.0V                                 |
| Junction Temperature .....              | 150°C                                |
| Storage Temperature Range.....          | -65°C to +150°C                      |
| Lead Temperature (Soldering, 10s) ..... | 260°C                                |
| ESD Susceptibility                      |                                      |
| HBM.....                                | 8000V                                |
| MM.....                                 | 400V                                 |

**RECOMMENDED OPERATING CONDITIONS**

|                                   |                |
|-----------------------------------|----------------|
| Operating Voltage Range.....      | 3.1V to 5.5V   |
| Operating Temperature Range ..... | -40°C to +85°C |

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

**PIN CONFIGURATION**

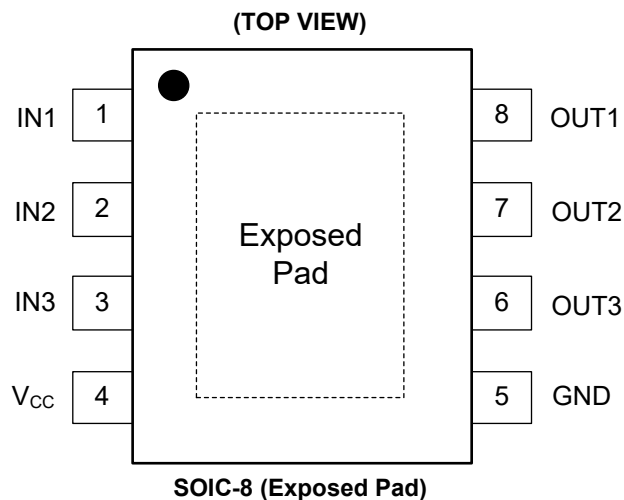

**PIN DESCRIPTION**

| PIN         | NAME            | FUNCTION  |
|-------------|-----------------|---|
| 1           | IN1             | Video Input for Channel 1.                                  |
| 2           | IN2             | Video Input for Channel 2.                                  |
| 3           | IN3             | Video Input for Channel 3.                                  |
| 4           | V <sub>CC</sub> | Power Supply.   |
| 5           | GND             | Ground.   |
| 6           | OUT3            | Video Output for Channel 3.                                 |
| 7           | OUT2            | Video Output for Channel 2.                                 |
| 8           | OUT1            | Video Output for Channel 1.                                 |
| Exposed Pad | —               | Exposed Pad. Can only be connected to GND or left floating. |





**ELECTRICAL CHARACTERISTICS**

( $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 1V_{PP}$ ,  $V_{CC} = 5V$ ,  $R_{SOURCE} = 37.5\Omega$ ; all inputs are AC-coupled with  $0.1\mu\text{F}$ ; all outputs are AC-coupled with  $220\mu\text{F}$  into  $150\Omega$ , referenced to  $400\text{kHz}$ , unless otherwise noted.)

| PARAMETER  | CONDITIONS  | MIN | TYP | MAX  | UNITS            |
|--|---|-----|-----|------|------------------|
| <b>DC Electrical Characteristics</b>                         |   |     |     |      |                  |
| Operating Voltage Range ( $V_{CC}$ )                         |   | 3.1 | 5   | 5.5  | V                |
| Quiescent Current ( $I_Q$ )                                  | $V_{CC} = 5V$ , No load                               |     | 75  | 94   | mA               |
| Output Level Shift Voltage ( $V_{OLS}$ )                     | $V_{IN} = 0V$ , No load                               |     | 500 | 700  | mV               |
| Voltage Gain ( $A_V$ )                                       | $R_L = 150\Omega$                                     | 5.8 | 6.1 | 6.35 | dB               |
| Output Voltage High Swing                                    | $V_{IN} = 3V$ , $R_L = 150\Omega$ to GND              |     | 4.8 |      | V                |
| Video Input Voltage Range                                    | Referenced to GND if DC-coupled                       |     | 1.4 |      | $V_{PP}$         |
| Power Supply Rejection Ratio (PSRR)                          | DC (All channels)                                     |     | 50  |      | dB               |
| <b>1080p High Definition Mode Electrical Characteristics</b> |   |     |     |      |                  |
| -0.1dB Bandwidth   | $R_L = 150\Omega$                                     |     | 78  |      | MHz              |
| -1dB Bandwidth   | $R_L = 150\Omega$                                     |     | 86  |      | MHz              |
| -3dB Bandwidth   | $R_L = 150\Omega$                                     |     | 98  |      | MHz              |
| Filter Response (Normalized Gain)                            | $f_{IN} = 400\text{kHz}$ to $148\text{MHz}$           |     | 22  |      | dB               |
| Slew Rate  | 2V Output step, 80% to 20%                            |     | 340 |      | V/ $\mu\text{s}$ |
| Group Delay Variation (D/DT)                                 | Difference between $400\text{kHz}$ and $70\text{MHz}$ |     | 5.3 |      | ns               |
| Crosstalk (channel-to-channel)                               | $V_{OUT} = 1.4V_{PP}$ , $f = 1\text{MHz}$             |     | -65 |      | dB               |
| Fall Time  | 2V Output step, 80% to 20%                            |     | 3.3 |      | ns               |
| Rise Time  | 2V Output step, 80% to 20%                            |     | 3.6 |      | ns               |


TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = +25^\circ\text{C}$ ,  $V_{IN} = 1V_{PP}$ ,  $V_{CC} = 5V$ ,  $R_{SOURCE} = 37.5\Omega$ ; all inputs are AC-coupled with  $0.1\mu\text{F}$ ; all outputs are AC-coupled with  $220\mu\text{F}$  into  $150\Omega$ , referenced to  $400\text{kHz}$ , unless otherwise noted.

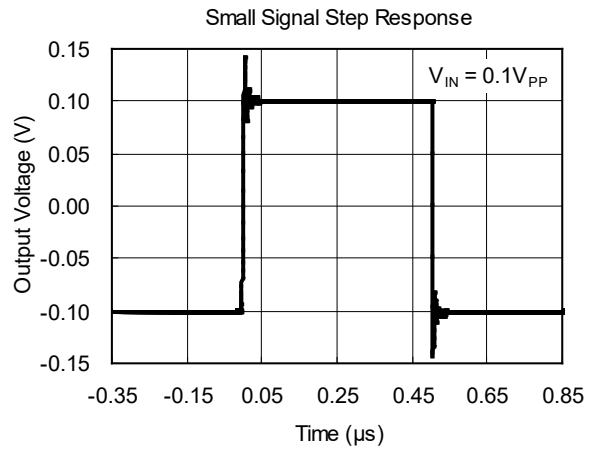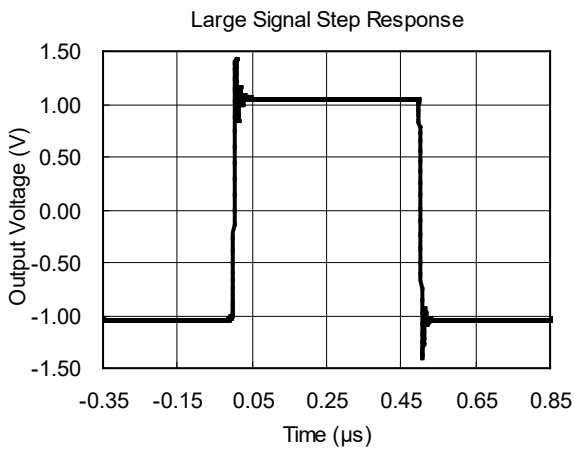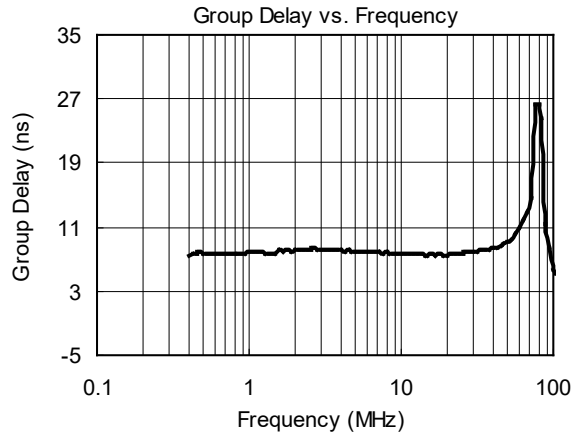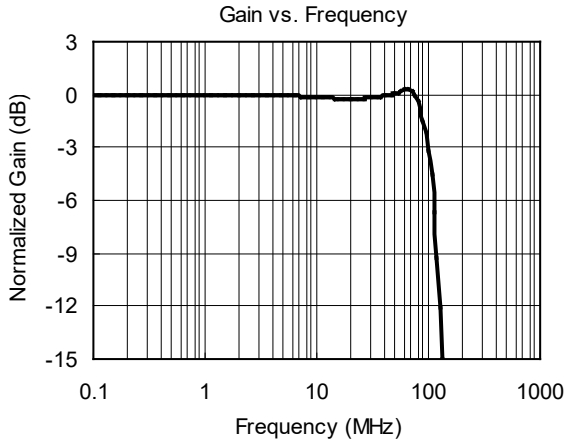

PACKAGE OUTLINE DIMENSIONS

SOIC-8 (Exposed Pad)

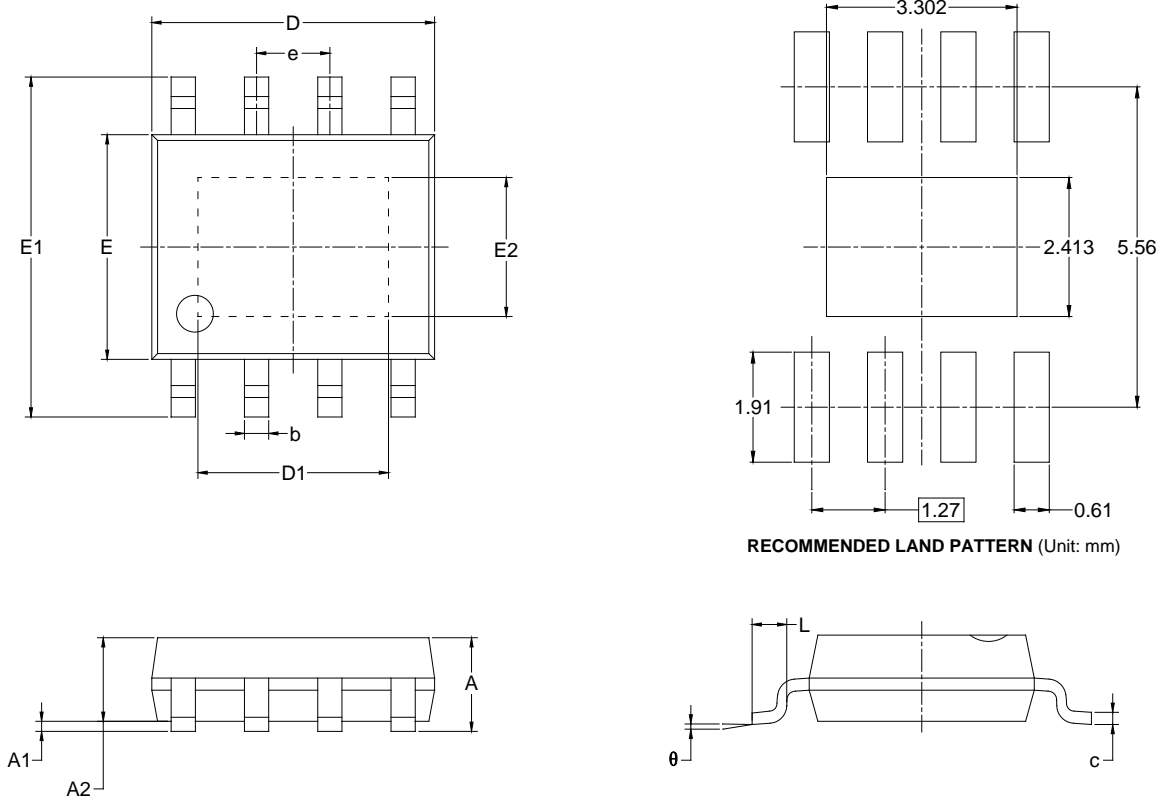

RECOMMENDED LAND PATTERN (Unit: mm)


| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      |                              | 1.700 |                         | 0.067 |
| A1     | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2     | 1.350                        | 1.550 | 0.053                   | 0.061 |
| b      | 0.330                        | 0.510 | 0.013                   | 0.020 |
| c      | 0.170                        | 0.250 | 0.007                   | 0.010 |
| D      | 4.700                        | 5.100 | 0.185                   | 0.201 |
| D1     | 3.202                        | 3.402 | 0.126                   | 0.134 |
| E      | 3.800                        | 4.000 | 0.150                   | 0.157 |
| E1     | 5.800                        | 6.200 | 0.228                   | 0.244 |
| E2     | 2.313                        | 2.513 | 0.091                   | 0.099 |
| e      | 1.27 BSC                     |       | 0.050 BSC               |       |
| L      | 0.400                        | 1.270 | 0.016                   | 0.050 |
| θ      | 0°                           | 8°    | 0°                      | 8°    |

NOTES:  
 1. Body dimensions do not include mode flash or protrusion.  
 2. This drawing is subject to change without notice.

# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

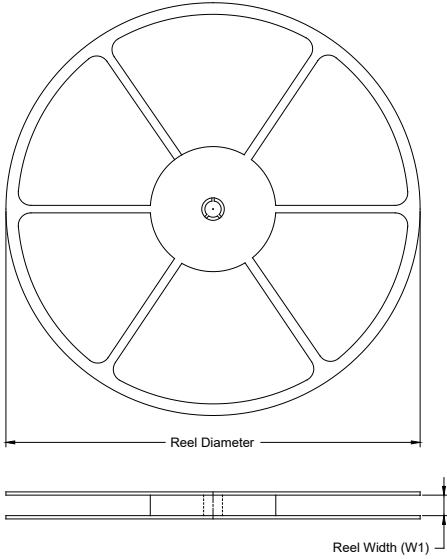

### TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

| Package Type            | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|-------------------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOIC-8<br>(Exposed Pad) | 13"           | 12.4               | 6.40    | 5.40    | 2.10    | 4.0     | 8.0     | 2.0     | 12.0   | Q1            |

000001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-----------|-------------|------------|-------------|--------------|
| 13"       | 386         | 280        | 370         | 5            |

DD0002



单击下面可查看定价，库存，交付和生命周期等信息

[>>SGMICRO\(圣邦微电子\)](#)