


## 3-Terminal Positive Voltage Regulator

### FEATURES

- Maximum Output Current  $I_o$ : 0.15 A
- Output Voltage  $V_o$ : 5V/6V/8V/9V/10V/12V/15V/18V/20V/24V
- Continuous Total Dissipation
- $P_D$ : 0.5 W ( $T_a = 25^\circ\text{C}$ )
- Thermal overload protection
- Short circuit current limiting

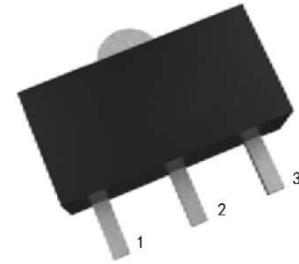

1: OUT 2: GND 3: IN

SOT-89P PLASTIC PACKAGE


### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter		Symbol	Rating	Unit
Input Voltage	78L05~78L15	$V_i$	30	V
	78L18~78L24		40	
Output Current	78L05~78L24	$I_o$	150	mA
Power Dissipation		$P_{tot}$	500 <sup>1)</sup>	mW
Operating Temperature		$T_{opr}$	- 40 to + 85	$^\circ\text{C}$
Junction Temperature Range		$T_j$	- 40 to +125	$^\circ\text{C}$
Storage Temperature Range		$T_{stg}$	- 55 to +150	$^\circ\text{C}$

1) Device is installed in the heat dissipation good environment


### 78L05 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified, $V_i = 10\text{ V}$ , $I_o = 40\text{ mA}$ , $C_1 = 0.33\ \mu\text{F}$ , $C_o = 0.1\ \mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_o$	$T_j = 25^\circ\text{C}$	4.75	5	5.25	V
		$7\text{ V} \leq V_i \leq 20\text{ V}$ , $1\text{ mA} \leq I_o \leq 40\text{ mA}$	4.65	5	5.35	V
Voltage Regulation	$S_v$	$7\text{ V} \leq V_i \leq 20\text{ V}$ , $T_j = 25^\circ\text{C}$	--	--	150	mV
		$8\text{ V} \leq V_i \leq 20\text{ V}$ , $T_j = 25^\circ\text{C}$	--	--	100	
Current Regulation	$S_i$	$1\text{ mA} \leq I_o \leq 100\text{ mA}$ , $T_j = 25^\circ\text{C}$	--	--	60	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6	mA
Quiescent Current Change	$\Delta I_Q$	$8\text{ V} \leq V_i \leq 20\text{ V}$	--	--	1.5	mA
		$1\text{ mA} \leq I_o \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	$S_{rip}$	$f = 120\text{ Hz}$ , $8\text{ V} \leq V_i \leq 18\text{ V}$ , $T_j = 25^\circ\text{C}$	--	49	--	dB
Dropout Voltage	$V_{Drop}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

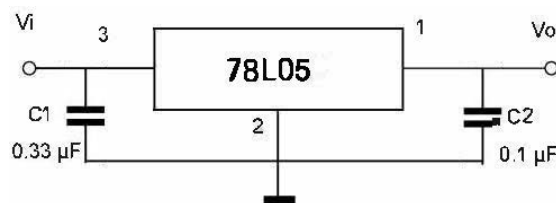


**78L06 Electrical Characteristics (T<sub>a</sub> = 25°C)** (Unless otherwise specified, V<sub>I</sub> = 10 V, I<sub>O</sub> = 40 mA, C<sub>I</sub> = 0.33 μF, C<sub>O</sub> = 0.1 μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25°C	5.70	6	6.30	V
		8.1 V ≤ V <sub>I</sub> ≤ 21 V, 1 mA ≤ I <sub>O</sub> ≤ 40 mA	5.58	6	6.42	V
Voltage Regulation	S <sub>v</sub>	8.1 V ≤ V <sub>I</sub> ≤ 21 V, T <sub>j</sub> = 25°C	--	--	150	mV
		9 V ≤ V <sub>I</sub> ≤ 21 V, T <sub>j</sub> = 25°C	--	--	110	
Current Regulation	S <sub>I</sub>	1 mA ≤ I <sub>O</sub> ≤ 100 mA, T <sub>j</sub> = 25°C	--	--	70	mV
Quiescent Current	I <sub>Q</sub>	T <sub>j</sub> = 25°C	--	--	6	mA
Quiescent Current Change	ΔI <sub>Q</sub>	9 V ≤ V <sub>I</sub> ≤ 21 V	--	--	1.5	mA
		1 mA ≤ I <sub>O</sub> ≤ 40 mA	--	--	0.1	
Ripple Rejection	S <sub>rip</sub>	f = 120 Hz, 9 V ≤ V <sub>I</sub> ≤ 19 V, T <sub>j</sub> = 25°C	--	47	--	dB
Dropout Voltage	V <sub>Drop</sub>	T <sub>j</sub> = 25°C	--	1.7	--	V

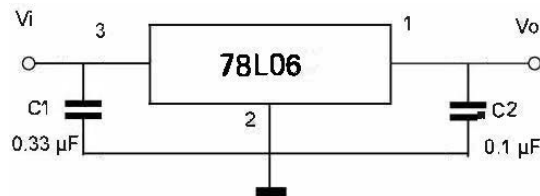

**78L08 Electrical Characteristics (T<sub>a</sub> = 25°C)** (Unless otherwise specified, 0 ≤ T<sub>J</sub> ≤ +125°C, V<sub>I</sub> = 14V, I<sub>O</sub> = 40mA, C<sub>I</sub> = 0.33μF, C<sub>O</sub> = 0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25°C	7.60	8	8.40	V
		10.5 V ≤ V <sub>I</sub> ≤ 23 V, 1 mA ≤ I <sub>O</sub> ≤ 40 mA	7.44	8	8.56	V
Voltage Regulation	S <sub>v</sub>	10.5 V ≤ V <sub>I</sub> ≤ 23 V, T <sub>j</sub> = 25°C	--	--	175	mV
		11 V ≤ V <sub>I</sub> ≤ 23 V, T <sub>j</sub> = 25°C	--	--	125	
Current Regulation	S <sub>I</sub>	1 mA ≤ I <sub>O</sub> ≤ 100 mA, T <sub>j</sub> = 25°C	--	--	80	mV
Quiescent Current	I <sub>Q</sub>	T <sub>j</sub> = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI <sub>Q</sub>	11 V ≤ V <sub>I</sub> ≤ 23 V	--	--	1.5	mA
		1 mA ≤ I <sub>O</sub> ≤ 40 mA	--	--	0.1	
Ripple Rejection	S <sub>rip</sub>	f = 120 Hz, 12 V ≤ V <sub>I</sub> ≤ 23 V, T <sub>j</sub> = 25°C	--	45	--	dB
Dropout Voltage	V <sub>Drop</sub>	T <sub>j</sub> = 25°C	--	1.7	--	V

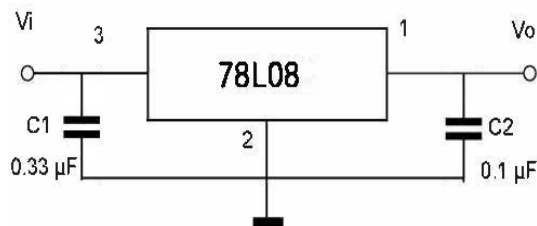


### 78L09 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified: $0 \leq T_J \leq +125^\circ\text{C}$ , $V_I = 15\text{V}$ , $I_O = 40\text{mA}$ , $C_I = 0.33\mu\text{F}$ , $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = 25^\circ\text{C}$	8.55	9	9.45	V
		$11.4\text{V} \leq V_I \leq 24\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	8.37	9	9.63	V
Voltage Regulation	$S_V$	$11.4\text{V} \leq V_I \leq 24\text{V}$ , $T_J = 25^\circ\text{C}$	--	--	200	mV
		$12\text{V} \leq V_I \leq 24\text{V}$ , $T_J = 25^\circ\text{C}$	--	--	160	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_J = 25^\circ\text{C}$	--	--	90	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$12\text{V} \leq V_I \leq 24\text{V}$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{rip}$	$f = 120\text{Hz}$ , $12\text{V} \leq V_I \leq 24\text{V}$ , $T_J = 25^\circ\text{C}$	--	44	--	dB
Dropout Voltage	$V_{Drop}$	$T_J = 25^\circ\text{C}$	--	1.7	--	V

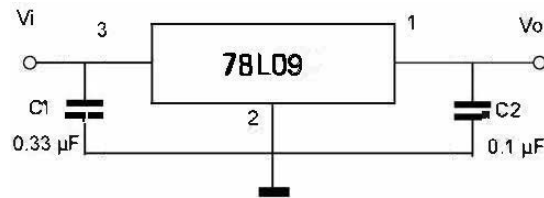


### 78L10 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified: $0 \leq T_J \leq +125^\circ\text{C}$ , $V_I = 16\text{V}$ , $I_O = 40\text{mA}$ , $C_I = 0.33\mu\text{F}$ , $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = 25^\circ\text{C}$	9.50	10	10.50	V
		$12.5\text{V} \leq V_I \leq 25\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	9.30	10	10.70	V
Voltage Regulation	$S_V$	$12.5\text{V} \leq V_I \leq 25\text{V}$ , $T_J = 25^\circ\text{C}$	--	--	230	mV
		$13\text{V} \leq V_I \leq 25\text{V}$ , $T_J = 25^\circ\text{C}$	--	--	170	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_J = 25^\circ\text{C}$	--	--	90	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$13\text{V} \leq V_I \leq 25$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{rip}$	$f = 120\text{Hz}$ , $13\text{V} \leq V_I \leq 24\text{V}$ , $T_J = 25^\circ\text{C}$	--	43	--	dB
Dropout Voltage	$V_{Drop}$	$T_J = 25^\circ\text{C}$	--	1.7	--	V

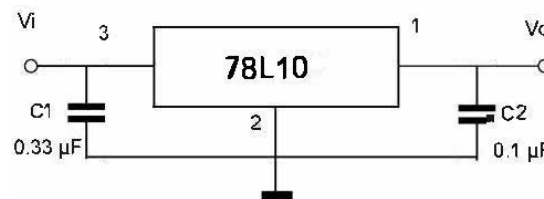


## 78L12 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified: $0 \leq T_J \leq +125^\circ\text{C}$ , $V_I = 19\text{V}$ , $I_O = 40\text{mA}$ , $C_I = 0.33\mu\text{F}$ , $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_j = 25^\circ\text{C}$	11.40	12	12.60	V
		$14.5\text{V} \leq V_I \leq 27\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	11.16	12	12.84	V
Voltage Regulation	$S_v$	$14.5\text{V} \leq V_I \leq 27\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	250	mV
		$16\text{V} \leq V_I \leq 27\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	200	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_j = 25^\circ\text{C}$	--	--	100	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$16\text{V} \leq V_I \leq 27\text{V}$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{Hz}$ , $15\text{V} \leq V_I \leq 25\text{V}$ , $T_j = 25^\circ\text{C}$	--	43	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

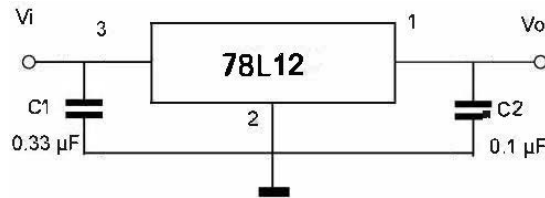


## 78L15 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified: $0 \leq T_J \leq +125^\circ\text{C}$ , $V_I = 23\text{V}$ , $I_O = 40\text{mA}$ , $C_I = 0.33\mu\text{F}$ , $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_j = 25^\circ\text{C}$	14.25	15	15.75	V
		$17.5\text{V} \leq V_I \leq 30\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	13.95	15	16.05	V
Voltage Regulation	$S_v$	$17.5\text{V} \leq V_I \leq 30\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	200	mV
		$20\text{V} \leq V_I \leq 30\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	250	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_j = 25^\circ\text{C}$	--	--	150	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$20\text{V} \leq V_I \leq 30\text{V}$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{Hz}$ , $18.5\text{V} \leq V_I \leq 28.5\text{V}$ , $T_j = 25^\circ\text{C}$	--	40	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

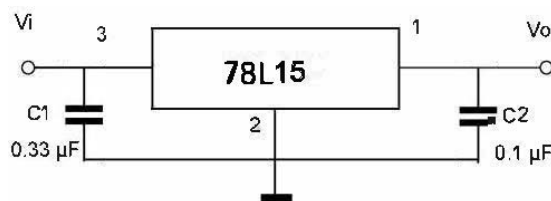


## 78L18 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified: $0 \leq T_J \leq +125^\circ\text{C}$ , $V_I = 27\text{V}$ , $I_O = 40\text{mA}$ , $C_I = 0.33\mu\text{F}$ , $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_j = 25^\circ\text{C}$	17.10	18	18.90	V
		$21.4\text{V} \leq V_I \leq 33\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	16.74	18	19.26	V
Voltage Regulation	$S_V$	$21.4\text{V} \leq V_I \leq 33\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	325	mV
		$22\text{V} \leq V_I \leq 33\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	275	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_j = 25^\circ\text{C}$	--	--	170	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$22\text{V} \leq V_I \leq 33\text{V}$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{Hz}$ , $23\text{V} \leq V_I \leq 33\text{V}$ , $T_j = 25^\circ\text{C}$	--	38	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

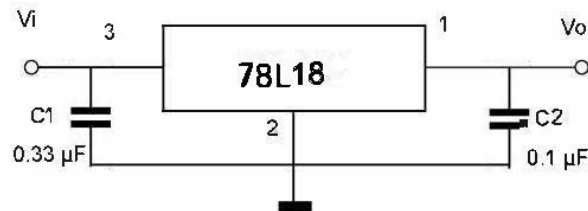


## 78L20 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ ) (Unless otherwise specified: $0 \leq T_J \leq +125^\circ\text{C}$ , $V_I = 29\text{V}$ , $I_O = 40\text{mA}$ , $C_I = 0.33\mu\text{F}$ , $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_j = 25^\circ\text{C}$	19.0	20	21.0	V
		$23.5\text{V} \leq V_I \leq 35\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	18.60	20	21.40	V
Voltage Regulation	$S_V$	$23.5\text{V} \leq V_I \leq 35\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	330	mV
		$24\text{V} \leq V_I \leq 35\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	285	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_j = 25^\circ\text{C}$	--	--	180	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$24\text{V} \leq V_I \leq 35\text{V}$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{Hz}$ , $25\text{V} \leq V_I \leq 35\text{V}$ , $T_j = 25^\circ\text{C}$	--	37	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

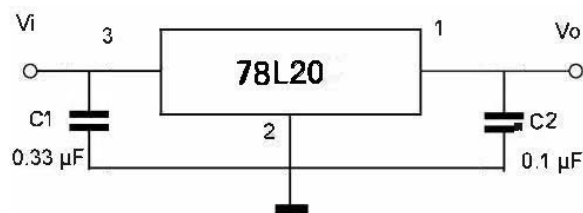

**78L24 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )** (Unless otherwise specified:  $0 \leq T_J \leq +125^\circ\text{C}$ ,  $V_I = 33\text{V}$ ,  $I_O = 40\text{mA}$ ,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = 25^\circ\text{C}$	22.80	24	25.20	V
		$27.5\text{V} \leq V_I \leq 38\text{V}$ , $1\text{mA} \leq I_O \leq 40\text{mA}$	22.32	24	25.68	V
Voltage Regulation	$S_V$	$27.5\text{V} \leq V_I \leq 38\text{V}$ , $T_J = 25^\circ\text{C}$	--	--	350	mV
		$28\text{V} \leq V_I \leq 38\text{V}$ , $T_J = 25^\circ\text{C}$	--	--	300	
Current Regulation	$S_I$	$1\text{mA} \leq I_O \leq 100\text{mA}$ , $T_J = 25^\circ\text{C}$	--	--	200	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$28\text{V} \leq V_I \leq 38\text{V}$	--	--	1.5	mA
		$1\text{mA} \leq I_O \leq 40\text{mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{Hz}$ , $29\text{V} \leq V_I \leq 39\text{V}$ , $T_J = 25^\circ\text{C}$	--	35	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_J = 25^\circ\text{C}$	--	1.7	--	V

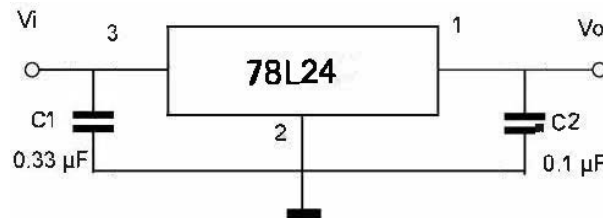

**Electrical characteristic curve**

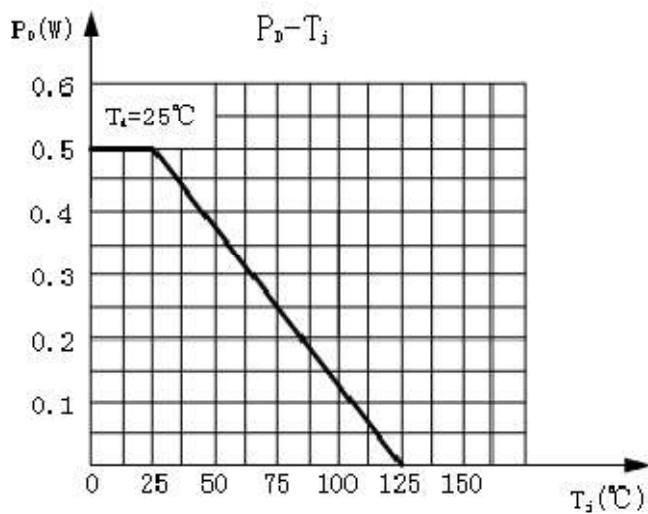


Figure 1: dissipation power relationship with the temperature curve


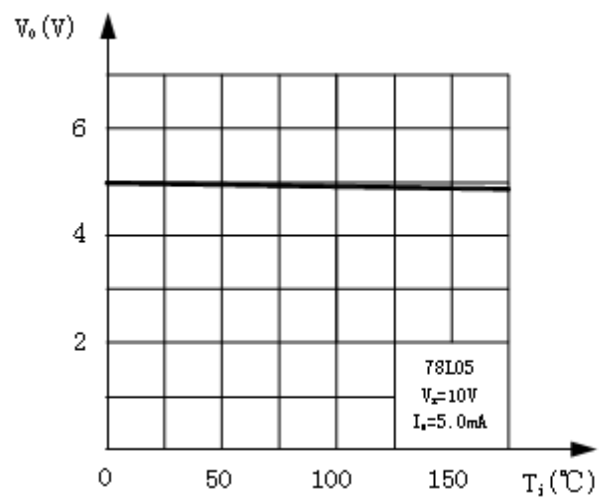


Figure 2 output voltage and junction temperature curve

## Outline Dimension

Unit: mm

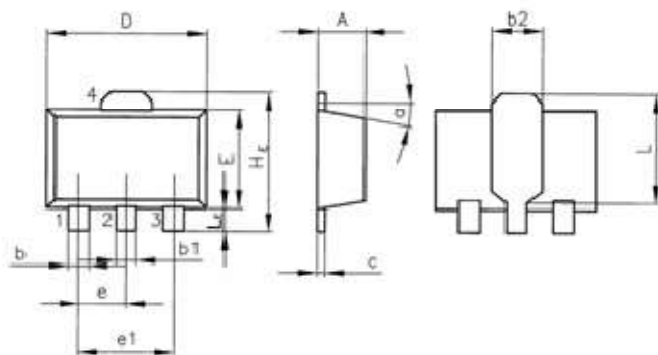

SOT-89P			
Symbol	min	typ	max
A	1.4	---	1.6
b	0.35	---	0.55
b1	0.4	---	0.65
b2	---	1.6	---
c	0.35	---	0.45
D	4.4	---	4.6
E	2.35	---	2.55
e	---	1.5	---
e1	---	3	---
HE	---	4.15	---
L	---	2.7	---
LE	---	1.0	---
$\alpha$	---	5°	---

单击下面可查看定价，库存，交付和生命周期等信息

[>>SHIKUES\(时科\)](#)