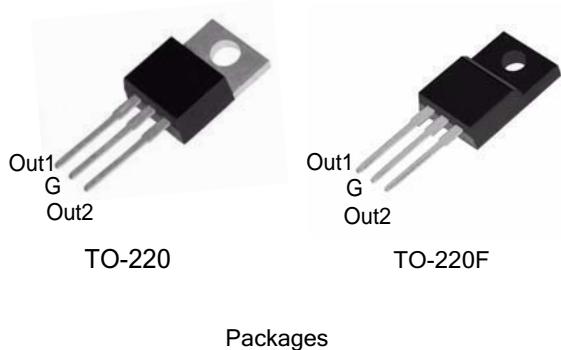


3 TERMINAL 1.0A POSITIVE VOLTAGE REGULATORS

DESCRIPTION

The SK78XXA series of three-terminal positive regulators are available in TO-220 and TO220F packages. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided ,they can deliver over 1.0A output current, Although designed as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltage and currents.

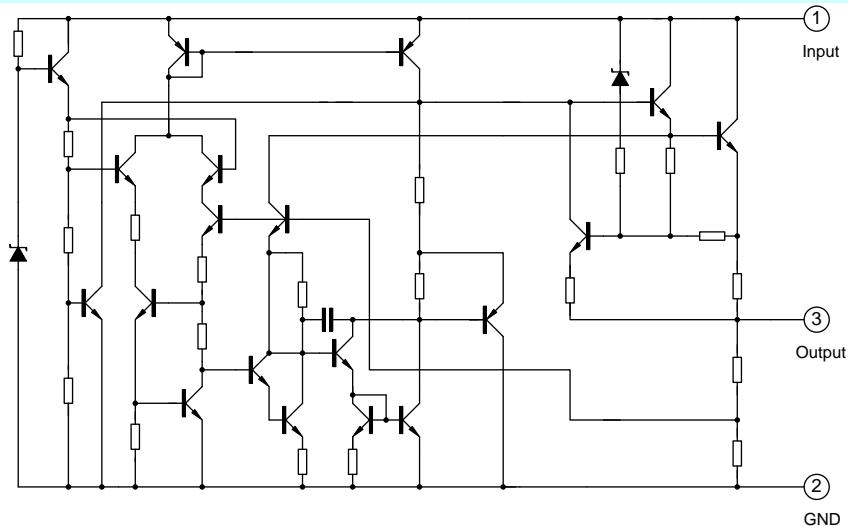


FEATURES

- *Output current up to 1.0A
- *Thermal overload protection
- *Short circuit protection
- *Output transistor SOA protection

Out1:Input Out2:Output G:GND

BLOCK DIAGRAM



ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Characteristic	Symbol	Value	Unit
Input voltage	Vi	35	V
Thermal resistance junction-air	R(JA)	65	°C/W
Thermal resistance junction-cases	RθJC	5	°C/W
Operating Temperature	Topr	-40~+125	°C
Storage Temperature	Tstg	-65~+150	°C

SK7805A ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $Vi = 10\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	$T_j = 25^\circ\text{C}$	4.8	5.0	5.2	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $Vi = 8\text{V to } 20\text{V}$	4.75	5.00	5.25	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}, Vi = 7.5\text{V to } 20\text{V}$		4	100	mV
		$T_j = 25^\circ\text{C}, Vi = 8\text{V to } 12\text{V}$		2	50	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA to } 1.0\text{A}$		9	100	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA to } 750\text{mA}$		4	50	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		4.2	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA to } 1.0\text{A}$		0.03	0.5	mA
		$Vi = 8\text{V to } 25\text{V}, I_o = 500\text{mA}$		0.3	0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		0.8		mV/°C
Output noise voltage	V_N	$f = 10\text{Hz to } 100\text{kHz}, Ta = 25^\circ\text{C}$		42		µV/Vo
Ripple rejection	RR	$f = 120\text{Hz}, Vi = 8\text{V to } 18\text{V}$	62	73		dB
Dropout voltage	Vo	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		15		mΩ
Short circuit current	I_{sc}	$Vi = 35\text{V}, Ta = 25^\circ\text{C}$		200		mA

SK7806A ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $Vi = 11\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	$T_j = 25^\circ\text{C}$	5.75	6	6.25	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $Vi = 9\text{V to } 21\text{V}$	5.65	6	6.25	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}, Vi = 8.5\text{V to } 25\text{V}$			120	mV
		$T_j = 25^\circ\text{C}, Vi = 9\text{V to } 13\text{V}$			60	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA to } 1.0\text{A}$			120	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA to } 750\text{mA}$			60	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		4.3	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA to } 1.0\text{A}$			0.5	mA
		$Vi = 9\text{V to } 25\text{V}, I_o = 500\text{mA}$			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		0.8		mV/°C
Output noise voltage	V_N	$f = 10\text{Hz to } 100\text{kHz}, Ta = 25^\circ\text{C}$		42		µV/Vo
Ripple rejection	RR	$f = 120\text{Hz}, Vi = 9\text{V to } 19\text{V}$		68		dB
Dropout voltage	Vo	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		17		mΩ
Short circuit current	I_{sc}	$Vi = 35\text{V}, Ta = 25^\circ\text{C}$		200		mA

SK7808A ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 14\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	7.84	8	8.16	V
		5.0mA < I_o < 1.0A, P_o < 15W $V_i = 11.5\text{V}$ to 23V	7.7	8	8.3	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 10.5\text{V}$ to 25V			160	mV
		$T_j=25^\circ\text{C}, V_i = 11\text{V}$ to 17V			80	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.0A			160	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA			80	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		4.3	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 11.5\text{V}$ to 25V, $I_o = 500\text{mA}$			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		1.0		mV/°C
Output noise voltage	V_N	f=10Hz to 100kHz, $T_a = 25^\circ\text{C}$	42			µV/Vo
Ripple rejection	RR	f=120Hz, $V_i = 11.5\text{V}$ to 21.5V	62			dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$	2			V
Output resistance	R_o	f=1kHz	18			mΩ
Short circuit current	I_{sc}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$	200			mA

SK7809A ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 15\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	8.82	9	9.18	V
		5.0mA < I_o < 1.0A, P_o < 15W $V_i = 12.5\text{V}$ to 24V	8.65	9	9.35	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 11.5\text{V}$ to 26V			180	mV
		$T_j=25^\circ\text{C}, V_i = 12\text{V}$ to 18V			90	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.0A			180	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA			90	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		4.3	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 12.5\text{V}$ to 25V, $I_o = 500\text{mA}$			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		1.2		mV/°C
Output noise voltage	V_N	f=10Hz to 100kHz, $T_a = 25^\circ\text{C}$	42			µV/Vo
Ripple rejection	RR	f=120Hz, $V_i = 12.5\text{V}$ to 22.5V	61			dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$	2			V
Output resistance	R_o	f=1kHz	18			mΩ
Short circuit current	I_{sc}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$	200			mA

SK7810A ELECTRICAL CHARACTERISTICS

 (Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 16\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j = 25^\circ\text{C}$	9.7	10	10.3	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 13.5\text{V}$ to 25V	9.6	10	10.4	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}, V_i = 12.5\text{V}$ to 28V		8	200	mV
		$T_j = 25^\circ\text{C}, V_i = 14\text{V}$ to 20V		4	100	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.0A		18	200	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		8	100	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		4.3	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 13\text{V}$ to 28V , $I_o = 500\text{mA}$			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		1.3		mV/°C
Output noise voltage	V_N	$f = 10\text{Hz}$ to 100kHz , $T_a = 25^\circ\text{C}$		42		µV/Vo
Ripple rejection	RR	$f = 120\text{Hz}$, $V_i = 13\text{V}$ to 23V		61		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		18		mΩ
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		200		mA

SK7812A ELECTRICAL CHARACTERISTICS

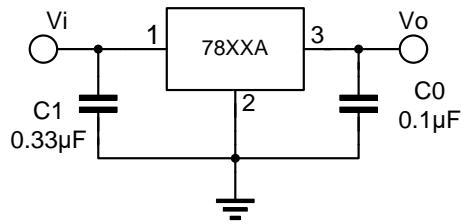
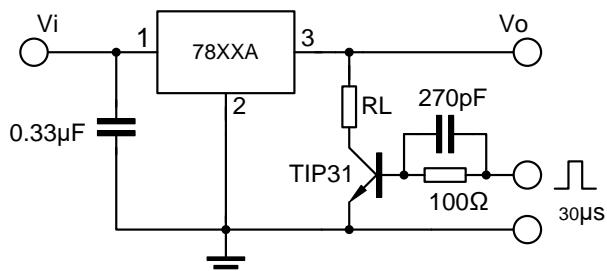
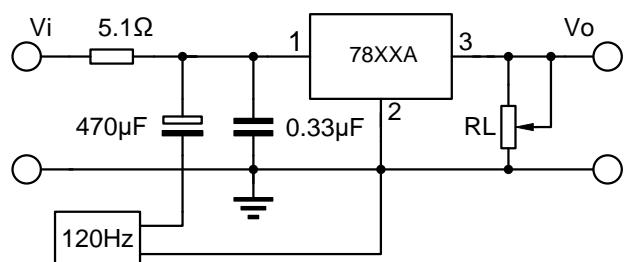
 (Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 19\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

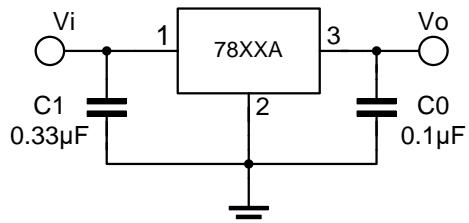
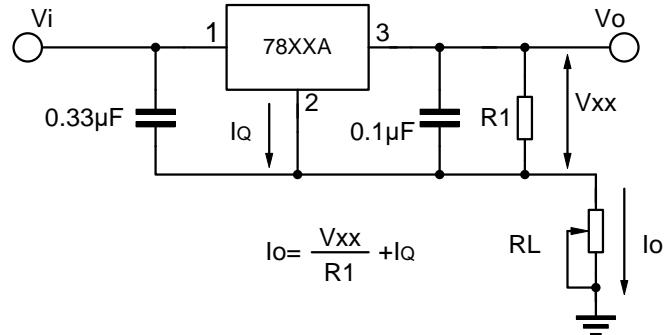
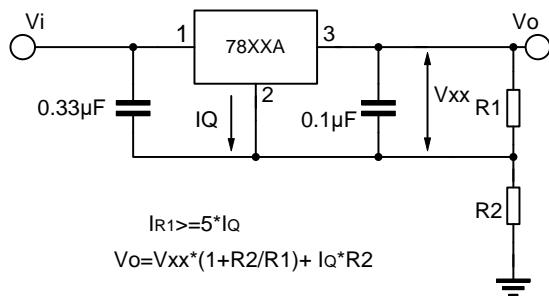
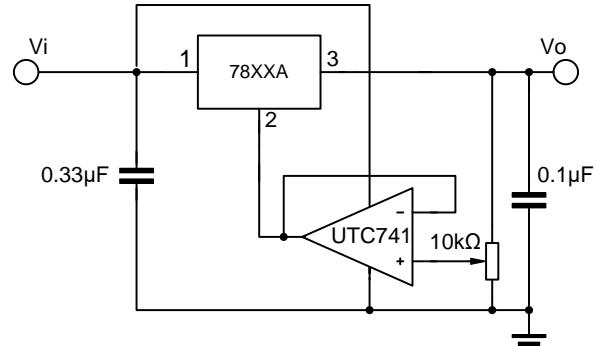
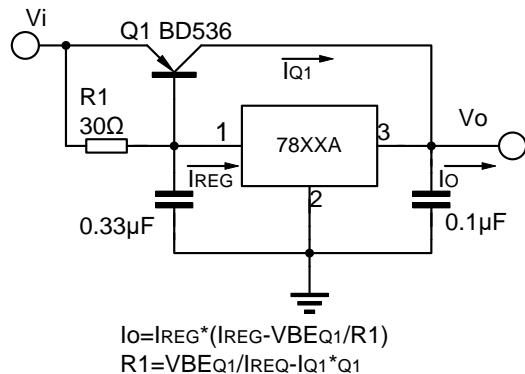
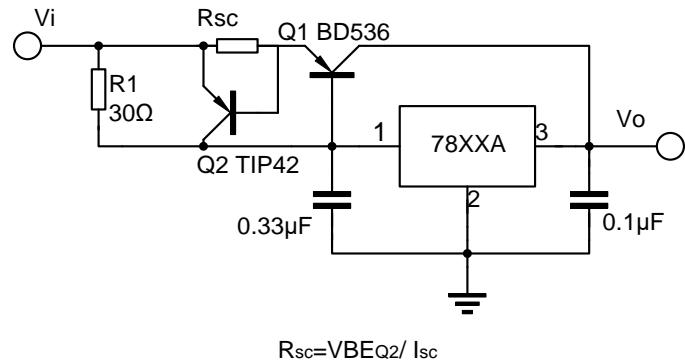
Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j = 25^\circ\text{C}$	11.5	12	12.5	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 15.5\text{V}$ to 27V	11.4	12	12.6	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}, V_i = 14.5\text{V}$ to 30V			240	mV
		$T_j = 25^\circ\text{C}, V_i = 16\text{V}$ to 22V			120	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.0A			240	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA			120	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		4.4	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 15\text{V}$ to 30V , $I_o = 500\text{mA}$			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		1.5		mV/°C
Output noise voltage	V_N	$f = 10\text{Hz}$ to 100kHz , $T_a = 25^\circ\text{C}$		42		µV/Vo
Ripple rejection	RR	$f = 120\text{Hz}$, $V_i = 15\text{V}$ to 25V		60		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		18		mΩ
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		200		mA

SK7815A ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 21\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j = 25^\circ\text{C}$	14.4	15	15.6	V
		$5.0\text{mA} < I_o < 1.0\text{A}$, $P_o < 15\text{W}$ $V_i = 17.5\text{V}$ to 30V	14.25	15	15.75	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}$, $V_i = 17.5\text{V}$ to 30V		15	300	mV
		$T_j = 25^\circ\text{C}$, $V_i = 20\text{V}$ to 26V		7	150	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}$, $I_o = 5.0\text{mA}$ to 1.0A		25	300	mV
		$T_j = 25^\circ\text{C}$, $I_o = 250\text{mA}$ to 750mA		10	150	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		5	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 18\text{V}$ to 30V , $I_o = 500\text{mA}$			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$			1.8	mV/ $^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to 100kHz , $T_a = 25^\circ\text{C}$		42		$\mu\text{V}/V_o$
Ripple rejection	RR	$f = 120\text{Hz}$, $V_i = 18\text{V}$ to 28V		60		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}$, $T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		18		$\text{m}\Omega$
Short circuit current	I_{sc}	$V_i = 35\text{V}$, $T_a = 25^\circ\text{C}$		200		mA

TEST CIRCUITS

FIG.1 DC PARAMETERS

FIG.2 LOAD REGULATION

FIG.3 RIPPLE REJECTION

APPLICATION CIRCUITS

Fig.4 Fixed output regulator

Fig.5 Constant current regulator

Fig.6 Circuit for increasing Regulator output voltage

Fig.7 Adjustable output

Fig.8 High current with voltage regulator

Fig.9 High output current short circuit protection

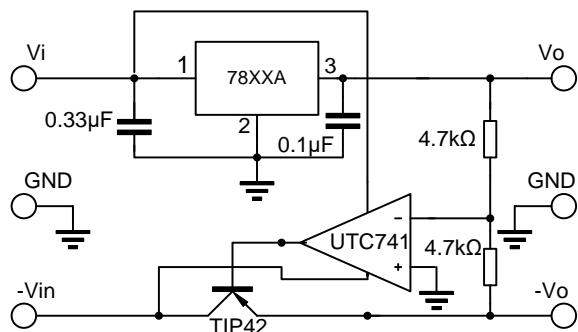


Fig.10 Tracking voltage regulator

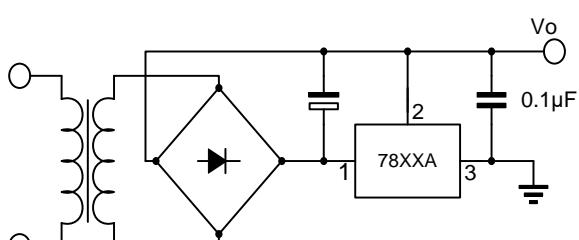


Fig.11 Negative output voltage circuit

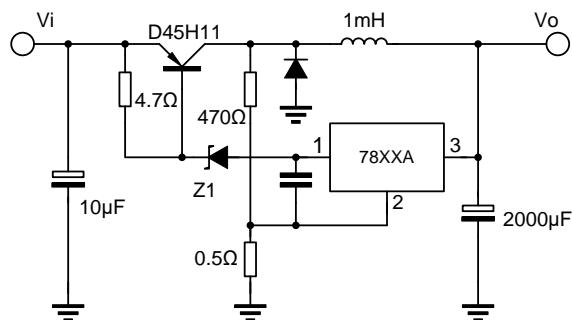
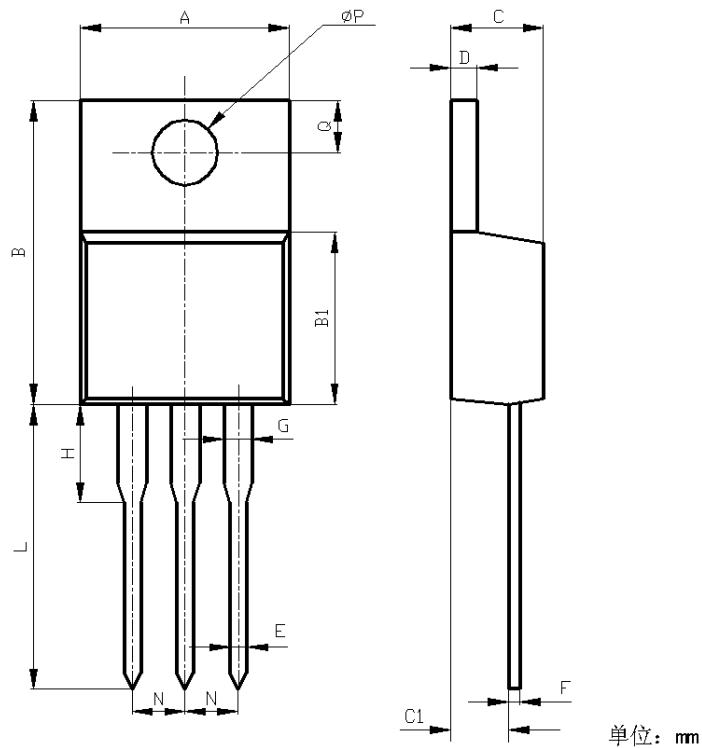


Fig.12 Switching regulator

PACKAGE OUTLINE

TO-220

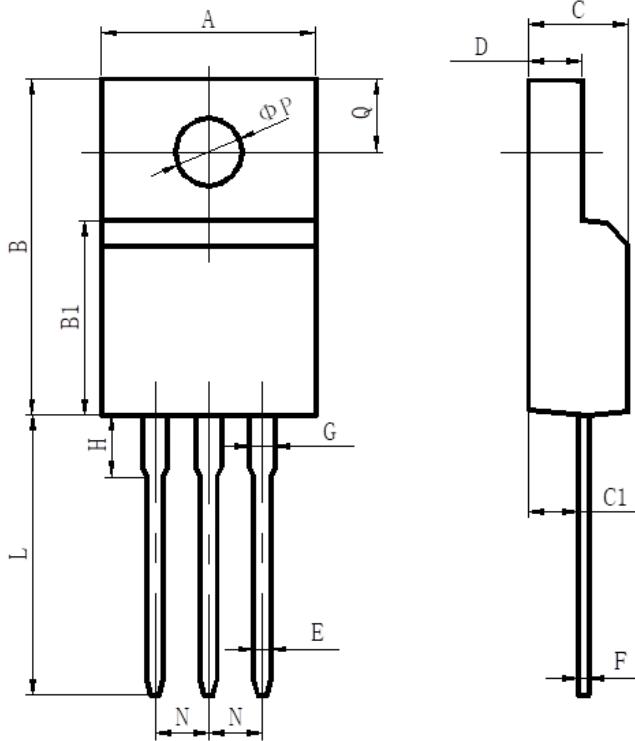


单位: mm

	Unit (mm)	
	MIN	MAX
A	10.1	10.5
B	15.2	15.6
B1	9.00	9.40
C	4.40	4.60
C1	2.40	3.00
D	1.20	1.40
E	0.70	0.90
F	0.40	0.60
G	1.17	1.37
H	3.30	3.80
L	13.1	13.7
N	2.34	2.74
Q	2.40	3.00
Φ P	3.70	3.90

PACKAGE OUTLINE

TO-220F



	Unit (mm)	
	MIN	MAX
A	9.70	10.30
B	15.50	16.10
B1	8.99	9.39
C	4.40	4.80
C1	2.15	2.55
D	2.50	2.90
E	0.70	0.90
F	0.40	0.60
G	1.12	1.42
H	3.40	3.80
L	12.6	13.6
N	2.34	2.74
Q	3.15	3.55
ΦP	3.00	3.30

单击下面可查看定价，库存，交付和生命周期等信息

[>>SHIKUES\(时科\)](#)