


## ● Features

- High collector current
- 1.3 W power dissipation.

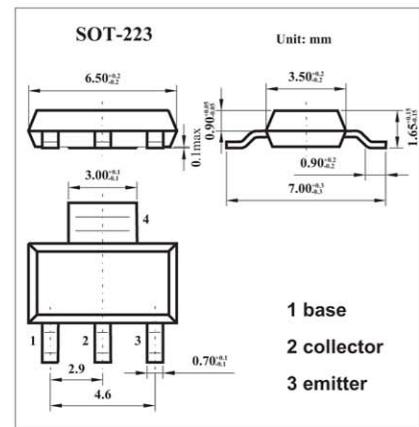

## ● Absolute Maximum Ratings Ta = 25°C

Parameter		Symbol	Rating	Unit
Collector-base voltage (open emitter)	BCP51	VCBO	-45	V
	BCP52		-60	V
	BCP53		-100	V
Collector-emitter voltage(open base)	BCP51	VCEO	-45	V
	BCP52		-60	V
	BCP53		-80	V
Emitter-base voltage( open collector)		V <sub>EBO</sub>	-5	V
Collector current		I <sub>C</sub>	-1	A
Peak collector current		I <sub>CM</sub>	-1.5	A
Peak base current		I <sub>BM</sub>	-0.2	A
Total power dissipation T <sub>amb</sub> ≤ 25°C		P <sub>tot</sub>	1.3	W
Storage temperature		T <sub>stg</sub>	-65 to +150	°C
Junction temperature		T <sub>j</sub>	150	°C
Operating ambient temperature		T <sub>amb</sub>	-65 to +150	°C
Thermal resistance from junction to ambient		R <sub>th(j-a)</sub>	95	K/W
Thermal resistance from junction to solder point		R <sub>th(j-s)</sub>	14	K/W

● Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector cutoff current	ICBO	V <sub>CB</sub> = -30 V, I <sub>E</sub> = 0			-100	nA
		V <sub>CB</sub> = -30 V, I <sub>E</sub> = 0; T <sub>j</sub> = 125°C			-10	µA
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = -5 V, I <sub>C</sub> = 0			-100	nA
DC current gain	h <sub>FE</sub>	I <sub>C</sub> = -5 mA; V <sub>CE</sub> = -2 V	63			
		I <sub>C</sub> = -150 mA; V <sub>CE</sub> = -2 V	63		250	
		I <sub>C</sub> = -500 mA; V <sub>CE</sub> = -2 V	40			
DC current gain BCP51-10,BCP52-10,BCP53-10 BCP51-16,BCP52-16,BCP53-16	h <sub>FE</sub>	I <sub>C</sub> = -150 mA; V <sub>CE</sub> = -2 V	63		160	
		I <sub>C</sub> = -150 mA; V <sub>CE</sub> = -2 V	100		250	
Collector-emitter saturation voltage	V <sub>CESAT</sub>	I <sub>C</sub> = -500 mA; I <sub>B</sub> = -50 mA			-0.5	V
Base to emitter voltage	V <sub>BE</sub>	I <sub>C</sub> = -500 mA; V <sub>CE</sub> = -2 V			-1	V
Transition frequency	f <sub>T</sub>	I <sub>C</sub> = -10 mA; V <sub>CE</sub> = -5 V; f = 100 MHz		115		MHz

单击下面可查看定价，库存，交付和生命周期等信息

[>>SHIKUES\(时科\)](#)