


Negative voltage regulators

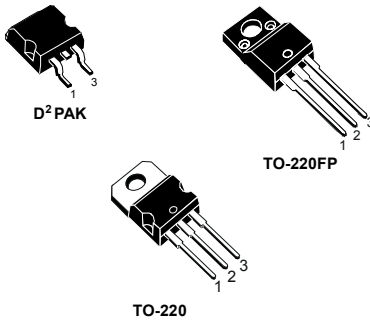

Features

- Output current up to 1.5 A
- Output voltages: -5, -8, -12, and -5 V
- Thermal overload protection
- Short-circuit protection
- Output SOA protection
- Output tolerance 2% (AC version) or 4% (C version) at 25 °C

Description

The L79 series of three-terminal negative regulators is available in TO-220, TO-220FP and D²PAK packages and several fixed output voltages, making it useful in a wide range of applications.

These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation; furthermore, having the same voltage option as the L78 positive standard series, they are particularly suited for split power supplies. If adequate heat sinking is provided, they can deliver over 1.5 A output current.


Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

Maturity status link

L79


1 Diagram

Figure 1. Schematic diagram

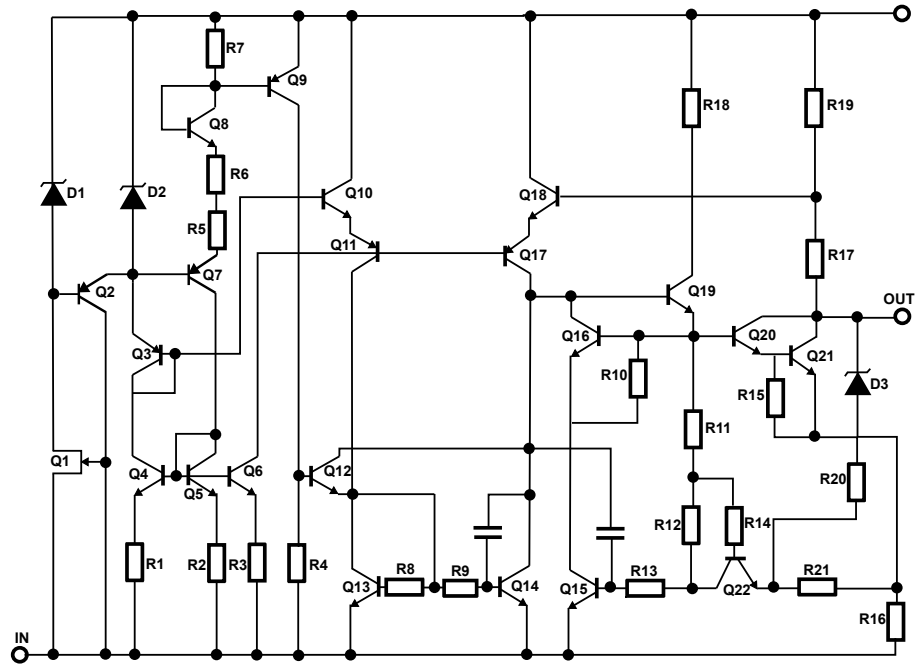

2 Pin configuration

Figure 2. Pin connections (top view)

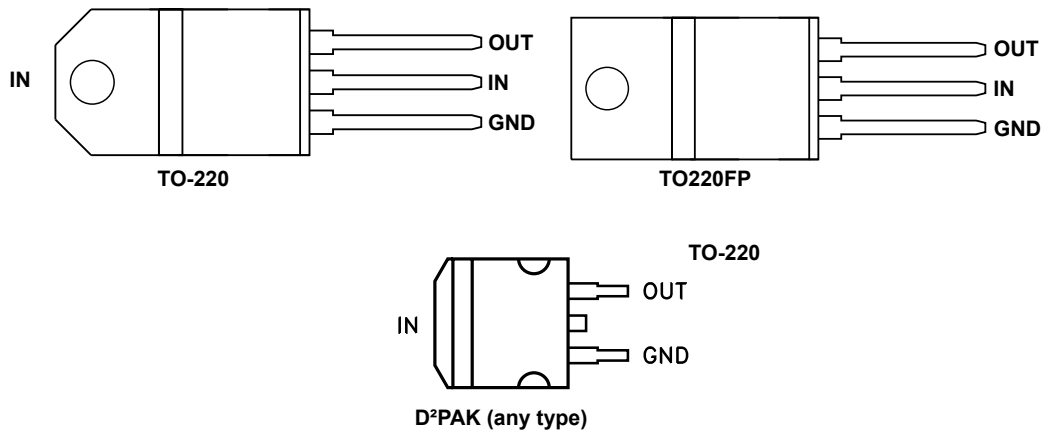

3 Maximum ratings

Table 1. Absolute maximum ratings

| Symbol | Parameter | | Value | Unit |
|-----------|--------------------------------------|-------------|--------------------|------|
| V_I | DC input voltage | | -35 | V |
| I_O | Output current | | Internally limited | |
| P_D | Power dissipation | | Internally limited | |
| T_{STG} | Storage temperature range | | -65 to 150 | °C |
| T_{OP} | Operating junction temperature range | for L79xxC | 0 to 150 | °C |
| | | for L79xxAC | 0 to 125 | |

Note:


Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 2. Thermal data

| Symbol | Parameter | D ² PAK | TO-220 | TO-220FP | Unit |
|------------|-------------------------------------|--------------------|--------|----------|------|
| R_{thJC} | Thermal resistance junction-case | 3 | 5 | 5 | °C/W |
| R_{thJA} | Thermal resistance junction-ambient | 62.5 | 50 | 60 | °C/W |

4 Test circuit

Figure 3. Test circuit

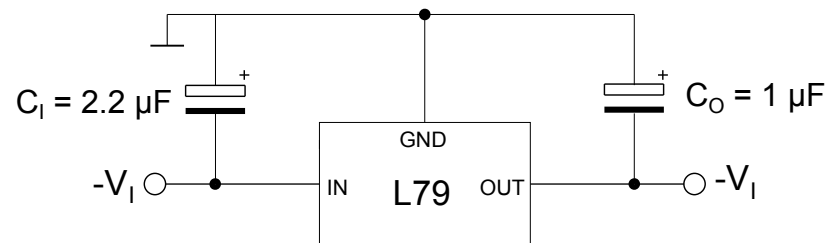

5 Electrical characteristics

Refer to the test circuits, $T_J = 0$ to 125 °C, $V_I = -10$ V, $I_O = 500$ mA, $C_I = 2.2$ μ F, $C_O = 1$ μ F unless otherwise specified.

Table 3. Electrical characteristics of L7905AC

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|----------------------------|---|------|------|------|---------|
| V_O | Output voltage | $T_J = 25$ °C | -4.9 | -5 | -5.1 | V |
| V_O | Output voltage | $I_O = -5$ mA to -1 A, $P_O \leq 15$ W $V_I = -8$ to -20 V | -4.8 | -5 | -5.2 | V |
| ΔV_O ⁽¹⁾ | Line regulation | $V_I = -7$ to -25 V, $T_J = 25$ °C | | | 100 | mV |
| | | $V_I = -8$ to -12 V, $T_J = 25$ °C | | | 50 | |
| ΔV_O ⁽¹⁾ | Load regulation | $I_O = 5$ mA to 1.5 A, $T_J = 25$ °C | | | 100 | mV |
| | | $I_O = 250$ to 750 mA, $T_J = 25$ °C | | | 50 | |
| I_d | Quiescent current | $T_J = 25$ °C | | | 3 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ mA to 1 A | | | 0.5 | mA |
| | | $V_I = -8$ to -25 V | | | 1.3 | |
| $\Delta V_O/\Delta V_T$ | Output voltage drift | $I_O = 5$ mA | | -0.4 | | mV/°C |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz, $T_J = 25$ °C | | 100 | | μ V |
| SVR | Supply voltage rejection | $\Delta V_I = 10$ V, $f = 120$ Hz | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1$ A, $T_J = 25$ °C, $\Delta V_O = 100$ mV | | 1.4 | | V |
| I_{sc} | Short circuit current | | | 1.8 | | A |
| I_{scp} | Short circuit peak current | $T_J = 25$ °C | | 1.8 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Refer to the test circuits, $T_J = 0$ to 125 °C, $V_I = -10$ V, $I_O = 500$ mA, $C_I = 2.2$ μ F, $C_O = 1$ μ F unless otherwise specified.

Table 4. Electrical characteristics of L7905C

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|-------------------|---|-------|------|-------|------|
| V_O | Output voltage | $T_J = 25$ °C | -4.8 | -5 | -5.2 | V |
| V_O | Output voltage | $I_O = -5$ mA to -1 A, $P_O \leq 15$ W $V_I = -8$ to -20 V | -4.75 | -5 | -5.25 | V |
| ΔV_O ⁽¹⁾ | Line regulation | $V_I = -7$ to -25 V, $T_J = 25$ °C | | | 100 | mV |
| | | $V_I = -8$ to -12 V, $T_J = 25$ °C | | | 50 | |
| ΔV_O ⁽¹⁾ | Load regulation | $I_O = 5$ mA to 1.5 A, $T_J = 25$ °C | | | 100 | mV |
| | | $I_O = 250$ to 750 mA, $T_J = 25$ °C | | | 50 | |
| I_d | Quiescent current | $T_J = 25$ °C | | | 3 | mA |

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|--------------------------|---|------|------|------|-------|
| ΔI_d | Quiescent current change | $I_O = 5 \text{ mA to } 1 \text{ A}$ | | | 0.5 | mA |
| | | $V_I = -8 \text{ to } -25 \text{ V}$ | | | 1.3 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -0.4 | | mV/°C |
| eN | Output noise voltage | $B = 10 \text{ Hz to } 100 \text{ kHz}, T_J = 25 \text{ °C}$ | | 100 | | μV |
| SVR | Supply voltage rejection | $\Delta V_I = 10 \text{ V}, f = 120 \text{ Hz}$ | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1 \text{ A}, T_J = 25 \text{ °C}, \Delta V_O = 100 \text{ mV}$ | | 1.4 | | V |
| I_{sc} | Short circuit current | | | 1.8 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Refer to the test circuits, $T_J = 0 \text{ to } 125 \text{ °C}$, $V_I = -14 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 2.2 \text{ μF}$, $C_O = 1 \text{ μF}$ unless otherwise specified.

Table 5. Electrical characteristics of L7908C

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|--------------------------|--|------|------|------|-------|
| V_O | Output voltage | $T_J = 25 \text{ °C}$ | -7.7 | -8 | -8.3 | V |
| V_O | Output voltage | $I_O = -5 \text{ mA to } -1 \text{ A}, P_O \leq 15 \text{ W}$ $V_I = -11.5 \text{ to } -23 \text{ V}$ | -7.6 | -8 | -8.4 | V |
| $\Delta V_O^{(1)}$ | Line regulation | $V_I = -10.5 \text{ to } -25 \text{ V}, T_J = 25 \text{ °C}$ | | | 160 | mV |
| | | $V_I = -11 \text{ to } -17 \text{ V}, T_J = 25 \text{ °C}$ | | | 80 | |
| $\Delta V_O^{(1)}$ | Load regulation | $I_O = 5 \text{ mA to } 1.5 \text{ A}, T_J = 25 \text{ °C}$ | | | 160 | mV |
| | | $I_O = 250 \text{ to } 750 \text{ mA}, T_J = 25 \text{ °C}$ | | | 80 | |
| I_d | Quiescent current | $T_J = 25 \text{ °C}$ | | | 3 | mA |
| ΔI_d | Quiescent current change | $I_O = 5 \text{ mA to } 1 \text{ A}$ | | | 0.5 | mA |
| | | $V_I = -11.5 \text{ to } -25 \text{ V}$ | | | 1 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -0.6 | | mV/°C |
| eN | Output noise voltage | $B = 10 \text{ Hz to } 100 \text{ kHz}, T_J = 25 \text{ °C}$ | | 175 | | μV |
| SVR | Supply voltage rejection | $\Delta V_I = 10 \text{ V}, f = 120 \text{ Hz}$ | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1 \text{ A}, T_J = 25 \text{ °C}, \Delta V_O = 100 \text{ mV}$ | | 1.1 | | V |
| I_{sc} | Short circuit current | | | 1.5 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Refer to the test circuits, $T_J = 0$ to 125 °C, $V_I = -19$ V, $I_O = 500$ mA, $C_I = 2.2$ μ F, $C_O = 1$ μ F unless otherwise specified.

Table 6. Electrical characteristics of L7912AC

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|--------|------|--------|---------|
| V_O | Output voltage | $T_J = 25$ °C | -11.75 | -12 | -12.25 | V |
| V_O | Output voltage | $I_O = -5$ mA to -1 A, $P_O \leq 15$ W $V_I = -15.5$ to -27 V | -11.5 | -12 | -12.5 | V |
| $\Delta V_O^{(1)}$ | Line regulation | $V_I = -14.5$ to -30 V, $T_J = 25$ °C | | | 240 | mV |
| | | $V_I = -16$ to -22 V, $T_J = 25$ °C | | | 120 | |
| $\Delta V_O^{(1)}$ | Load regulation | $I_O = 5$ mA to 1.5 A, $T_J = 25$ °C | | | 240 | mV |
| | | $I_O = 250$ to 750 mA, $T_J = 25$ °C | | | 120 | |
| I_d | Quiescent current | $T_J = 25$ °C | | | 3 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ mA to 1 A | | | 0.5 | mA |
| | | $V_I = -15$ to -30 V | | | 1 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5$ mA | | -0.8 | | mV/°C |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz, $T_J = 25$ °C | | 200 | | μ V |
| SVR | Supply voltage rejection | $\Delta V_I = 10$ V, $f = 120$ Hz | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1$ A, $T_J = 25$ °C, $\Delta V_O = 100$ mV | | 1.1 | | V |
| I_{sc} | Short circuit current | | | 1.0 | | A |
| I_{scp} | Short circuit peak current | $T_J = 25$ °C, $V_I = -10$ V | | 1.8 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Refer to the test circuits, $T_J = 0$ to 125 °C, $V_I = -19$ V, $I_O = 500$ mA, $C_I = 2.2$ μ F, $C_O = 1$ μ F unless otherwise specified.

Table 7. Electrical characteristics of L7912C

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------------|-------------------|--|-------|------|-------|------|
| V_O | Output voltage | $T_J = 25$ °C | -11.5 | -12 | -12.5 | V |
| V_O | Output voltage | $I_O = -5$ mA to -1 A, $P_O \leq 15$ W $V_I = -15.5$ to -27 V | -11.4 | -12 | -12.6 | V |
| $\Delta V_O^{(1)}$ | Line regulation | $V_I = -14.5$ to -30 V, $T_J = 25$ °C | | | 240 | mV |
| | | $V_I = -16$ to -22 V, $T_J = 25$ °C | | | 120 | |
| $\Delta V_O^{(1)}$ | Load regulation | $I_O = 5$ mA to 1.5 A, $T_J = 25$ °C | | | 240 | mV |
| | | $I_O = 250$ to 750 mA, $T_J = 25$ °C | | | 120 | |
| I_d | Quiescent current | $T_J = 25$ °C | | | 3 | mA |

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|--------------------------|---|------|------|------|-------|
| ΔI_d | Quiescent current change | $I_O = 5 \text{ mA to } 1 \text{ A}$ | | | 0.5 | mA |
| | | $V_I = -15 \text{ to } -30 \text{ V}$ | | | 1 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -0.8 | | mV/°C |
| eN | Output noise voltage | $B = 10 \text{ Hz to } 100 \text{ kHz}, T_J = 25 \text{ °C}$ | | 200 | | μV |
| SVR | Supply voltage rejection | $\Delta V_I = 10 \text{ V}, f = 120\text{Hz}$ | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1 \text{ A}, T_J = 25 \text{ °C}, \Delta V_O = 100 \text{ mV}$ | | 1.1 | | V |
| I_{sc} | Short circuit current | | | 1.0 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Refer to the test circuits, $T_J = 0 \text{ to } 125 \text{ °C}$, $V_I = -23 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 2.2 \text{ μF}$, $C_O = 1 \text{ μF}$ unless otherwise specified.

Table 8. Electrical characteristics of L7915AC

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|-------|------|-------|-------|
| V_O | Output voltage | $T_J = 25 \text{ °C}$ | -14.7 | -15 | -15.3 | V |
| V_O | Output voltage | $I_O = -5 \text{ mA to } -1 \text{ A}, P_O \leq 15 \text{ W}$ $V_I = -18.5 \text{ to } -30 \text{ V}$ | -14.4 | -15 | -15.6 | V |
| $\Delta V_O^{(1)}$ | Line regulation | $V_I = -17.5 \text{ to } -30 \text{ V}, T_J = 25 \text{ °C}$ | | | 300 | mV |
| | | $V_I = -20 \text{ to } -26 \text{ V}, T_J = 25 \text{ °C}$ | | | 150 | |
| $\Delta V_O^{(1)}$ | Load regulation | $I_O = 5 \text{ mA to } 1.5 \text{ A}, T_J = 25 \text{ °C}$ | | | 300 | mV |
| | | $I_O = 250 \text{ to } 750 \text{ mA}, T_J = 25 \text{ °C}$ | | | 150 | |
| I_d | Quiescent current | $T_J = 25 \text{ °C}$ | | | 3 | mA |
| ΔI_d | Quiescent current change | $I_O = 5 \text{ mA to } 1 \text{ A}$ | | | 0.5 | mA |
| | | $V_I = -18.5 \text{ to } -30 \text{ V}$ | | | 1 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -0.9 | | mV/°C |
| eN | Output noise voltage | $B = 10 \text{ Hz to } 100 \text{ kHz}, T_J = 25 \text{ °C}$ | | 250 | | μV |
| SVR | Supply voltage rejection | $\Delta V_I = 10 \text{ V}, f = 120 \text{ Hz}$ | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1 \text{ A}, T_J = 25 \text{ °C},$ $\Delta V_O = 100 \text{ mV}$ | | 1.1 | | V |
| I_{sc} | Short circuit current | | | 0.7 | | A |
| I_{scp} | Short circuit peak current | $T_J = 25 \text{ °C}, V_I = -10 \text{ V}$ | | 1.8 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

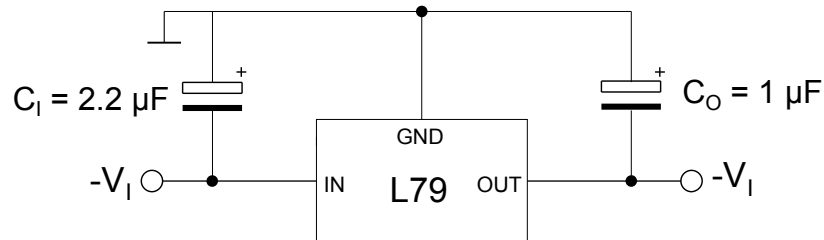
Refer to the test circuits, $T_J = 0$ to 125 °C, $V_I = -23$ V, $I_O = 500$ mA, $C_I = 2.2$ μ F, $C_O = 1$ μ F unless otherwise specified.

Table 9. Electrical characteristics of L7915C


| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|--------------------------|--|-------|------|-------|---------|
| V_O | Output voltage | $T_J = 25$ °C | -14.4 | -15 | -15.6 | V |
| V_O | Output voltage | $I_O = -5$ mA to -1 A, $P_O \leq 15$ W $V_I = -18.5$ to -30 V | -14.3 | -15 | -15.7 | V |
| ΔV_O ⁽¹⁾ | Line regulation | $V_I = -17.5$ to -30 V, $T_J = 25$ °C | | | 300 | mV |
| | | $V_I = -20$ to -26 V, $T_J = 25$ °C | | | 150 | |
| ΔV_O ⁽¹⁾ | Load regulation | $I_O = 5$ mA to 1.5 A, $T_J = 25$ °C | | | 300 | mV |
| | | $I_O = 250$ to 750 mA, $T_J = 25$ °C | | | 150 | |
| I_d | Quiescent current | $T_J = 25$ °C | | | 3 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ mA to 1 A | | | 0.5 | mA |
| | | $V_I = -18.5$ to -30 V | | | 1 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5$ mA | | -0.9 | | mV/°C |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz, $T_J = 25$ °C | | 250 | | μ V |
| SVR | Supply voltage rejection | $\Delta V_I = 10$ V, $f = 120$ Hz | 54 | 60 | | dB |
| V_d | Dropout voltage | $I_O = 1$ A, $T_J = 25$ °C, $\Delta V_O = 100$ mV | | 1.1 | | V |
| I_{sc} | Short circuit current | | | 0.7 | | A |

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.


6 Application information

Figure 4. Fixed output regulator


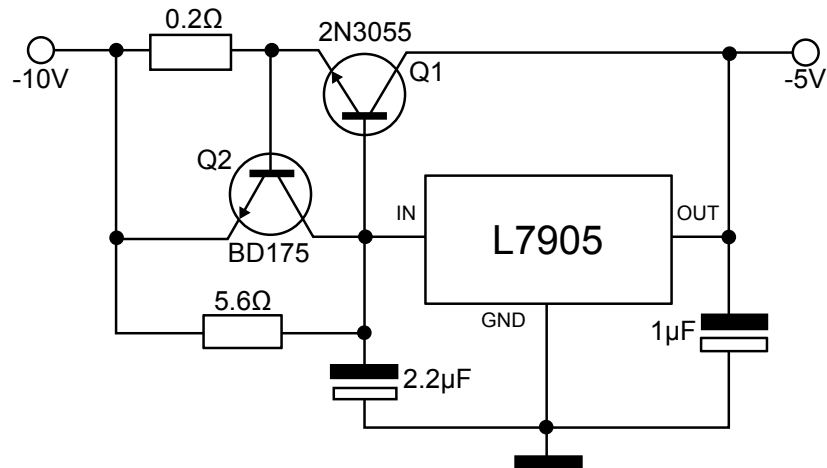
Note: C_I is required for stability. For value given, capacitor must be solid tantalum. If aluminium electrolytic are used, at least ten times value should be selected. C_O is required if regulator is located an appreciable distance from power supply filter. To improve transient response. If large capacitors are used, a high current diode from input to output (1N4001 or similar) should be introduced to protect the device from momentary input short circuit.

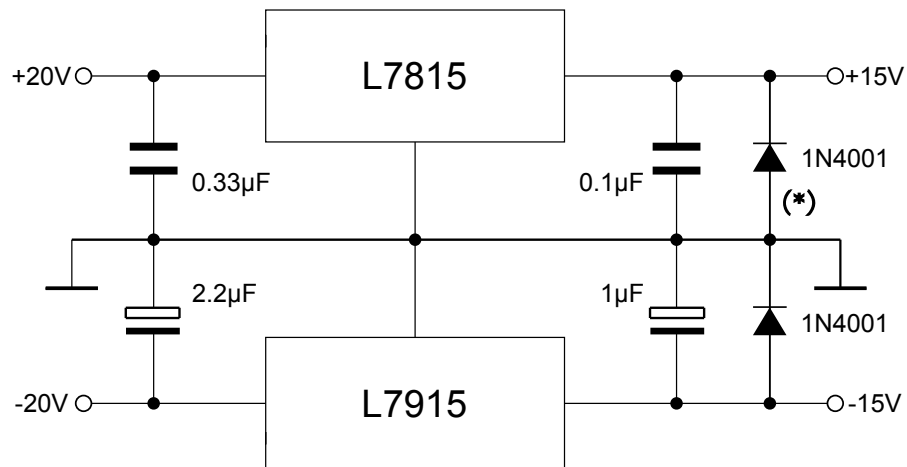Figure 5. Split power supply ($\pm 15\text{ V} - 1\text{ A}$)


* Against potential latch-up problems

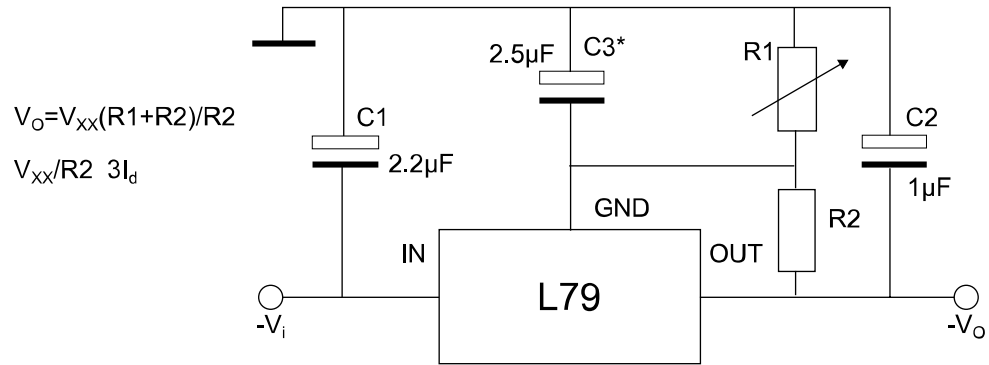Figure 6. Circuit for increasing output voltage


* C3 Optional for improved transient response and ripple rejection.

Figure 7. High current negative regulator (-5 V / 4 A with 5 A current limiting)


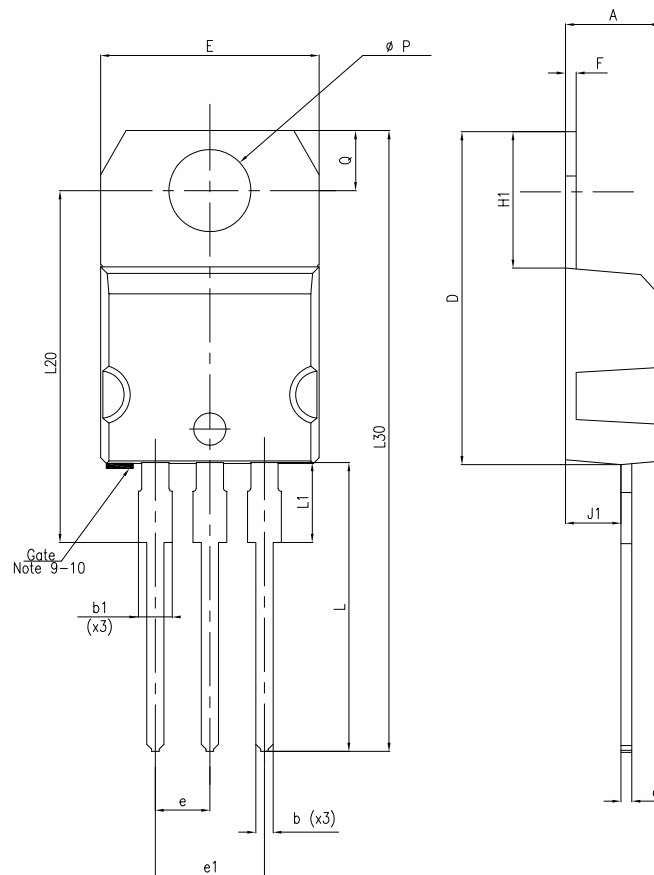
7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.

ECOPACK® is an ST trademark.

7.1 TO-220 (single gauge) package information

Figure 8. TO-220 (single gauge) package outline




8174627 Rev 6

Table 10. TO-220 (single gauge) package mechanical data

| Dim. | mm | | |
|------|-------|-------|-------|
| | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 |
| b | 0.61 | | 0.88 |
| b1 | 1.14 | | 1.70 |
| c | 0.48 | | 0.70 |
| D | 15.25 | | 15.75 |
| E | 10.00 | | 10.40 |
| e | 2.40 | | 2.70 |
| e1 | 4.95 | | 5.15 |
| F | 0.51 | | 0.60 |
| H1 | 6.20 | | 6.60 |
| J1 | 2.40 | | 2.72 |
| L | 13.00 | | 14.00 |
| L1 | 3.50 | | 3.93 |
| L20 | | 16.40 | |
| L30 | | 28.90 | |
| ΦP | 3.75 | | 3.85 |
| Q | 2.65 | | 2.95 |

7.2 TO-220 (dual gauge) package information

Figure 9. TO-220 type A package outline

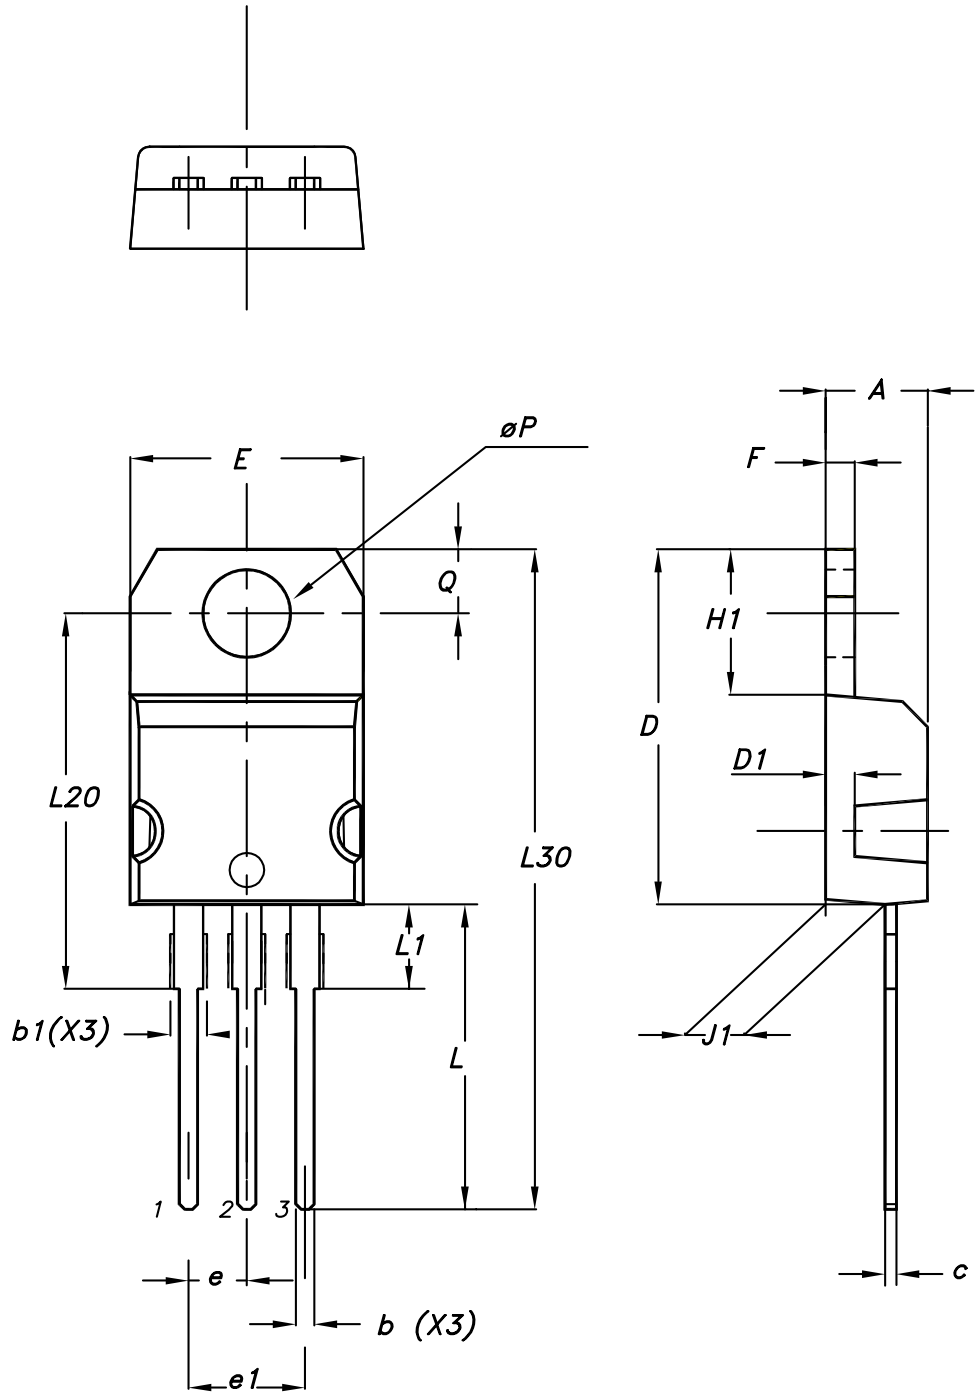


0015988_typeA_Rev_22

Table 11. TO-220 type A package mechanical data

| Dim. | mm | | |
|------|-------|-------|-------|
| | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 |
| b | 0.61 | | 0.88 |
| b1 | 1.14 | | 1.55 |
| c | 0.48 | | 0.70 |
| D | 15.25 | | 15.75 |
| D1 | | 1.27 | |
| E | 10.00 | | 10.40 |
| e | 2.40 | | 2.70 |
| e1 | 4.95 | | 5.15 |
| F | 1.23 | | 1.32 |
| H1 | 6.20 | | 6.60 |
| J1 | 2.40 | | 2.72 |
| L | 13.00 | | 14.00 |
| L1 | 3.50 | | 3.93 |
| L20 | | 16.40 | |
| L30 | | 28.90 | |
| øP | 3.75 | | 3.85 |
| Q | 2.65 | | 2.95 |

7.3 TO-220FP package information

Figure 10. TO-220FP package outline

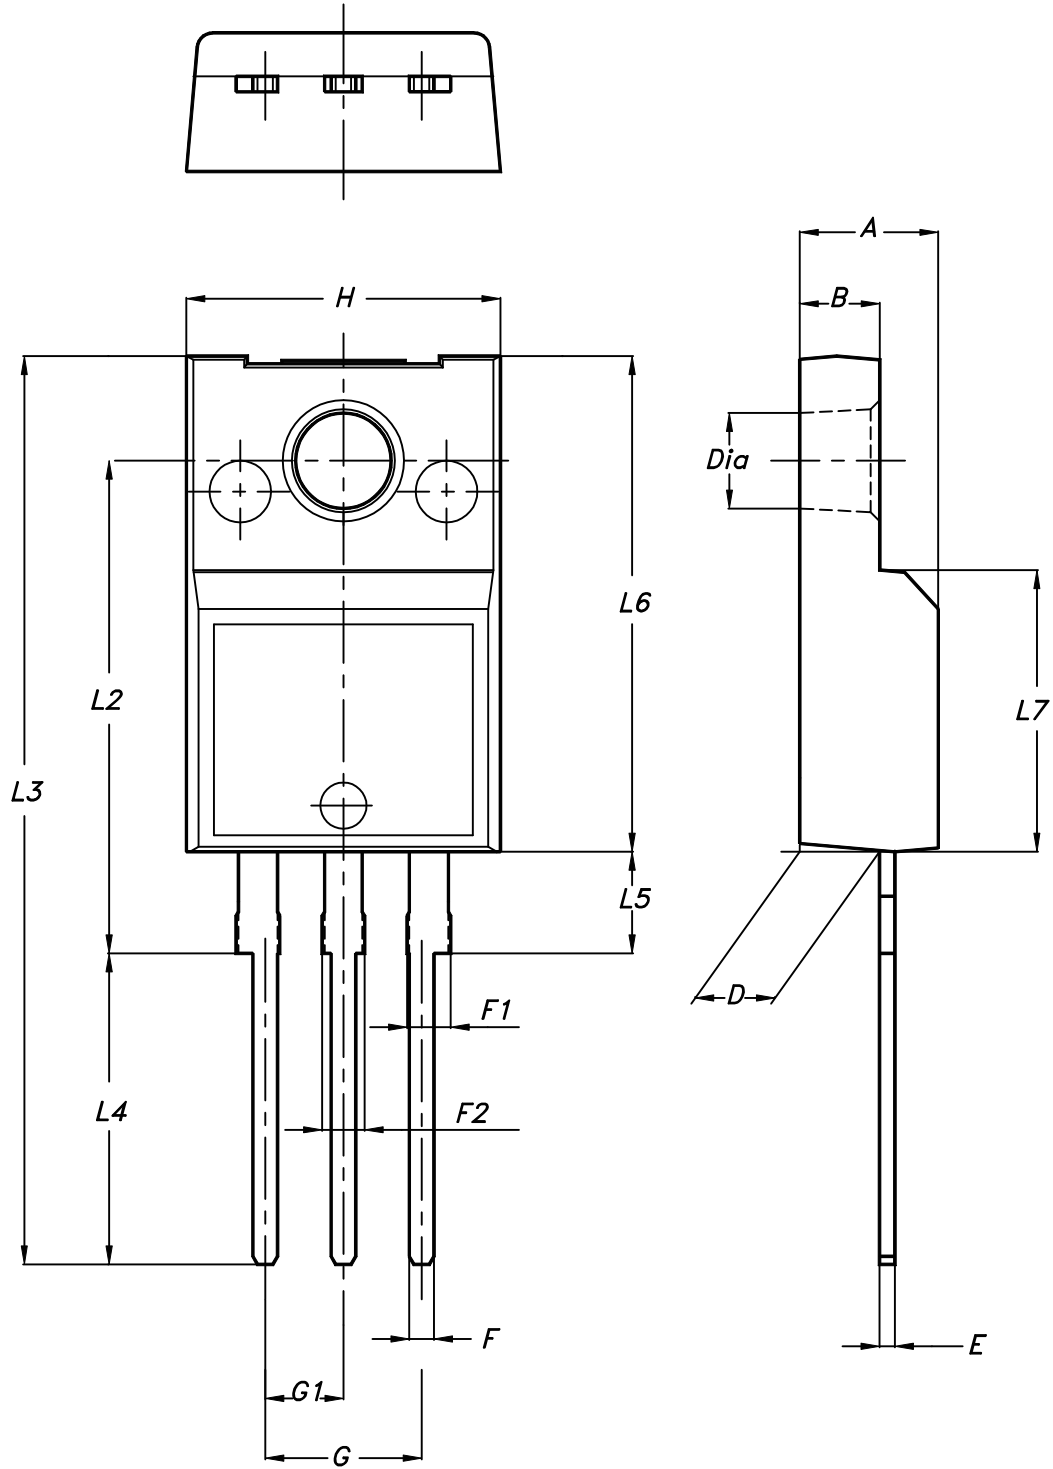


7012510_Rev_12_B

Table 12. TO-220FP package mechanical data

| Dim. | mm | | |
|------|------|------|------|
| | Min. | Typ. | Max. |
| A | 4.4 | | 4.6 |
| B | 2.5 | | 2.7 |
| D | 2.5 | | 2.75 |
| E | 0.45 | | 0.7 |
| F | 0.75 | | 1 |
| F1 | 1.15 | | 1.70 |
| F2 | 1.15 | | 1.70 |
| G | 4.95 | | 5.2 |
| G1 | 2.4 | | 2.7 |
| H | 10 | | 10.4 |
| L2 | | 16 | |
| L3 | 28.6 | | 30.6 |
| L4 | 9.8 | | 10.6 |
| L5 | 2.9 | | 3.6 |
| L6 | 15.9 | | 16.4 |
| L7 | 9 | | 9.3 |
| Dia | 3 | | 3.2 |

7.4 D²PAK (TO-263) type A package information

Figure 11. D²PAK (TO-263) type A package outline

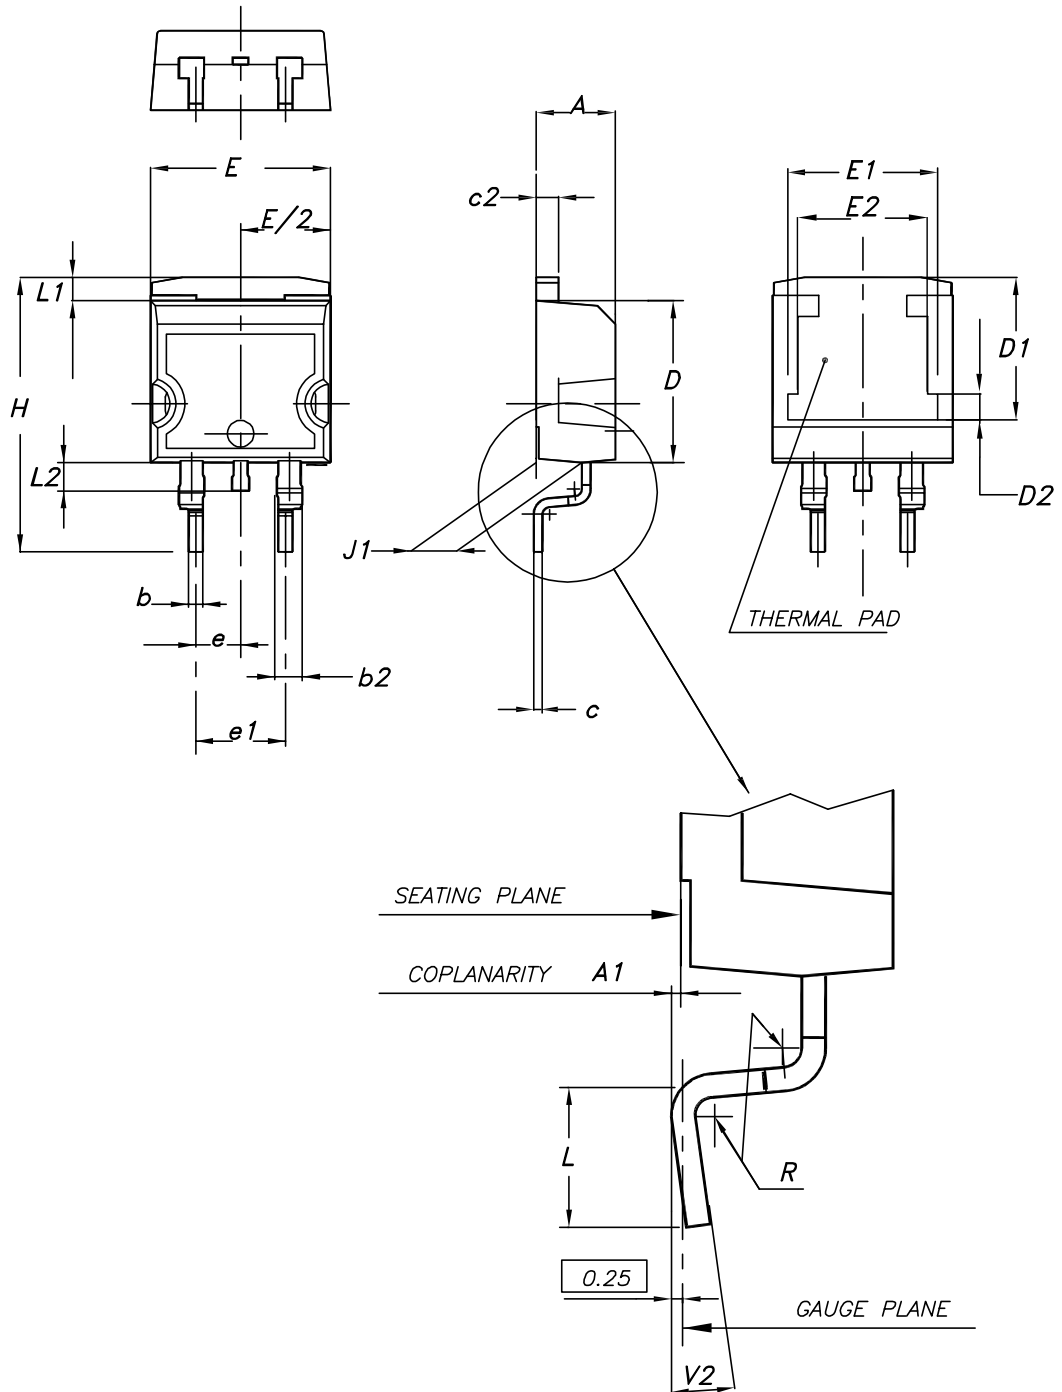


0079457_25

Table 13. D²PAK (TO-263) type A package mechanical data

| Dim. | mm | | |
|------|-------|------|-------|
| | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 |
| A1 | 0.03 | | 0.23 |
| b | 0.70 | | 0.93 |
| b2 | 1.14 | | 1.70 |
| c | 0.45 | | 0.60 |
| c2 | 1.23 | | 1.36 |
| D | 8.95 | | 9.35 |
| D1 | 7.50 | 7.75 | 8.00 |
| D2 | 1.10 | 1.30 | 1.50 |
| E | 10.00 | | 10.40 |
| E1 | 8.30 | 8.50 | 8.70 |
| E2 | 6.85 | 7.05 | 7.25 |
| e | | 2.54 | |
| e1 | 4.88 | | 5.28 |
| H | 15.00 | | 15.85 |
| J1 | 2.49 | | 2.69 |
| L | 2.29 | | 2.79 |
| L1 | 1.27 | | 1.40 |
| L2 | 1.30 | | 1.75 |
| R | | 0.40 | |
| V2 | 0° | | 8° |


Figure 12. D²PAK (TO-263) recommended footprint (dimensions are in mm)

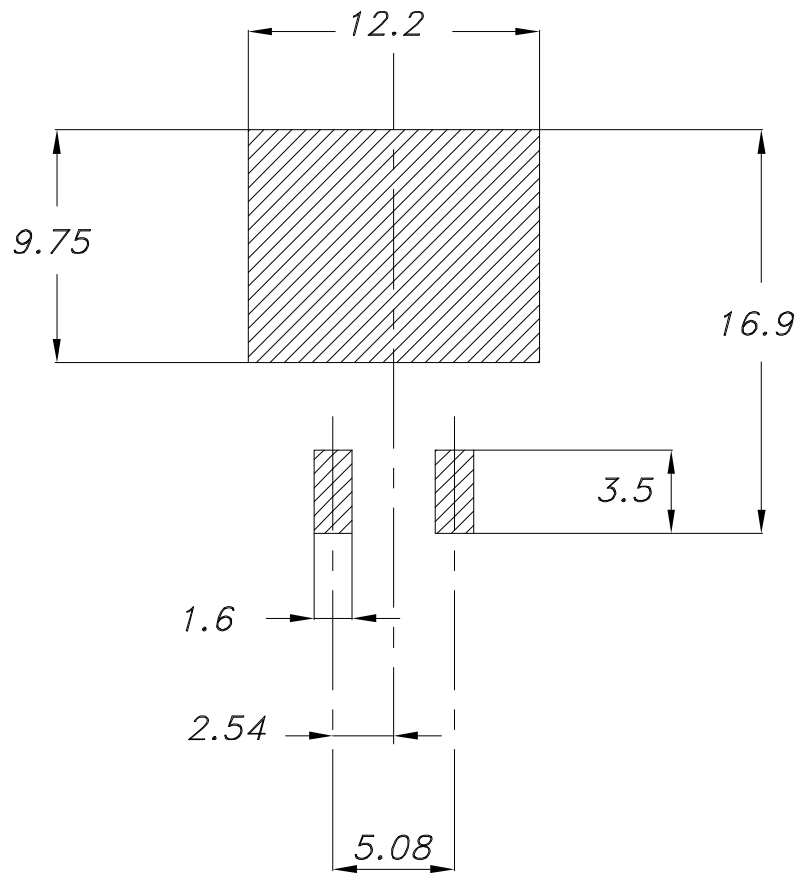

Footprint


7.5 D²PAK packing information

Figure 13. D²PAK tape outline

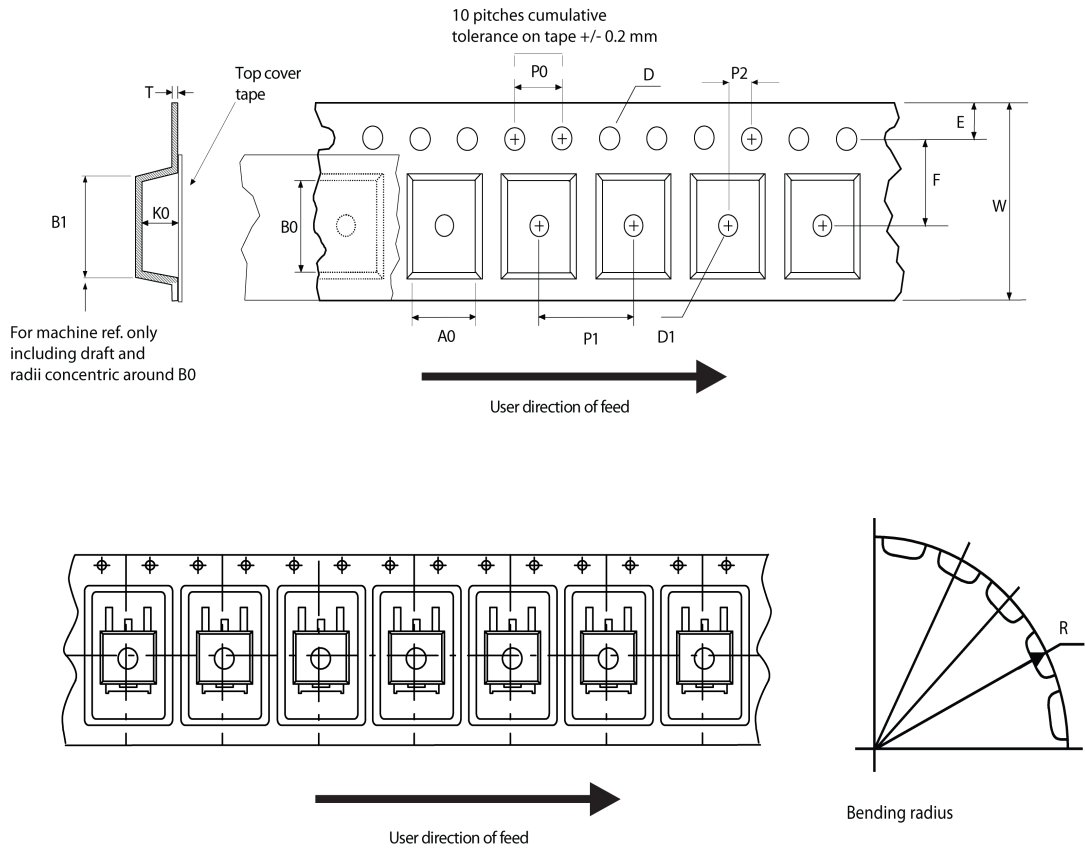

AM08852v1

Figure 14. D²PAK reel outline

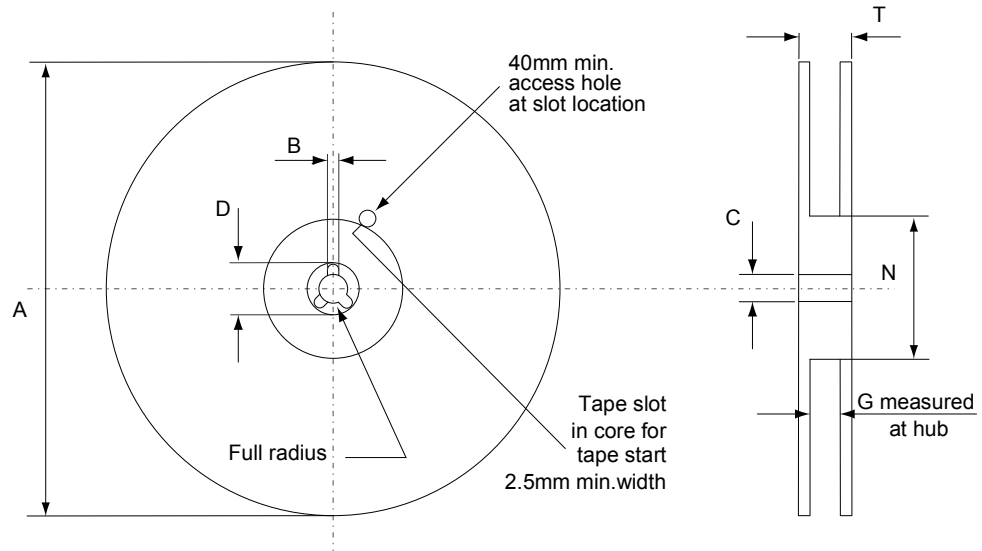

AM06038v1

Table 14. D²PAK tape and reel mechanical data

| Tape | | | Reel | | | | |
|------|------|------|---------------|------|------|---------------|------|
| Dim. | mm | | Dim. | mm | | | |
| | Min. | Max. | | Min. | Max. | | |
| A0 | 10.5 | 10.7 | A | | 330 | | |
| B0 | 15.7 | 15.9 | B | 1.5 | | | |
| D | 1.5 | 1.6 | C | 12.8 | 13.2 | | |
| D1 | 1.59 | 1.61 | D | 20.2 | | | |
| E | 1.65 | 1.85 | G | 24.4 | 26.4 | | |
| F | 11.4 | 11.6 | N | 100 | | | |
| K0 | 4.8 | 5.0 | T | | 30.4 | | |
| P0 | 3.9 | 4.1 | Base quantity | | | | |
| P1 | 11.9 | 12.1 | | | | 1000 | |
| P2 | 1.9 | 2.1 | | | | Bulk quantity | 1000 |
| R | 50 | | | | | | |
| T | 0.25 | 0.35 | | | | | |
| W | 23.7 | 24.3 | | | | | |

8 Device summary

Table 15. Order codes

| TO-220 (single gauge) | TO-220 (dual gauge) | D ² PAK | TO-220FP | Output voltages |
|--------------------------|------------------------|--------------------|----------|-----------------|
| L7905ACV | L7905ACV-DG | L7905ACD2T-TR | | -5 V |
| L7905CV | L7905CV-DG | L7905CD2T-TR | L7905CP | -5 V |
| L7908CV | L7908CV-DG | | | -8 V |
| L7912ACV | L7912ACV-DG | | | -12 V |
| L7912CV | L7912CV-DG | L7912CD2T-TR | L7912CP | -12 V |
| L7915ACV | L7915ACV-DG | | | -15 V |
| L7915CV | L7915CV-DG | | L7915CP | -15 V |

Revision history

Table 16. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 22-Jun-2004 | 9 | Order codes updated Table 3. |
| 31-Aug-2005 | 10 | Add new order codes (TO-220 E Type) on Table 3. |
| 19-Jan-2007 | 11 | D ² PAK mechanical data updated and add footprint data. |
| 06-Jun-2007 | 12 | Order codes updated. |
| 25-Oct-2007 | 13 | Modified: Figure 3, Figure 4, Figure 6 and Figure 7. |
| 05-Dec-2007 | 14 | Modified: Table 1. |
| 18-Feb-2008 | 15 | Modified: Table 1 on page 1. |
| 15-Jul-2008 | 16 | Modified: Table 1 on page 1. |
| 19-Jan-2010 | 17 | Modified: Table 11 on page 14, added: Figure 8 on page 16, Figure 9 on page 17, Figure 10 and Figure 11 on page 18. |
| 26-May-2010 | 18 | Modified: VI parameter Table 2 on page 5. |
| 12-Nov-2010 | 19 | Modified: R _{thJC} value for TO-220 Table 3 on page 5. |
| 18-Nov-2011 | 20 | Added: order codes L7905CV-DG, L7912CV-DG and L7915CV-DG Table 1 on page 1. |
| 15-May-2012 | 21 | Added: order codes L7908CV-DG Table 1 on page 1. |
| 04-Jun-2014 | 22 | Part numbers L79xxC and L79xxAC changed to L79. Updated the features and the description in cover page. Updated Table 1: Device summary, Section 3: Maximum ratings, Section 4: Test circuit, Section 5: Electrical characteristics, Section 6: Application information, Section 7: Package mechanical data. Added Section 8: Packaging mechanical data. Minor text changes. |
| 27-Sep-2017 | 23 | In Table 4: "Electrical characteristics of L7905AC": - updated I _{sc} and I _{scp} Typ. Values In Table 5: "Electrical characteristics of L7905C": - updated I _{sc} Typ. Values In Table 7: "Electrical characteristics of L7912AC": - updated I _{sc} Typ. Value - updated I _{scp} Test conditions and Typ. Value In Table_8_Electrical_characteristics_of_L - updated I _{sc} Typ. Value In Table 9: "Electrical characteristics of L7915AC": - updated I _{sc} Typ. Value - updated I _{scp} Test conditions and Typ. Value In Table 10: "Electrical characteristics of L7915C" - updated I _{sc} Typ. Value Updated Section 7: "Package information" |
| 15-Jan-2019 | 24 | Updated: Section 5 Electrical characteristics . |

Contents

| | | |
|----------|--|-----------|
| 1 | Diagram | 2 |
| 2 | Pin configuration | 3 |
| 3 | Maximum ratings | 4 |
| 4 | Test circuit | 5 |
| 5 | Electrical characteristics | 6 |
| 6 | Application information | 11 |
| 7 | Package information | 13 |
| 7.1 | TO-220 (single gauge) package information | 13 |
| 7.2 | TO-220 (dual gauge) package information | 14 |
| 7.3 | TO-220FP package information | 16 |
| 7.4 | D ² PAK (TO-263) type A package information | 18 |
| 7.5 | D ² PAK packing information | 21 |
| 8 | Ordering information | 24 |
| | Revision history | 25 |
| | Contents | 26 |
| | List of tables | 27 |
| | List of figures | 28 |

List of tables

| | | |
|------------------|--|----|
| Table 1. | Absolute maximum ratings | 4 |
| Table 2. | Thermal data | 4 |
| Table 3. | Electrical characteristics of L7905AC | 6 |
| Table 4. | Electrical characteristics of L7905C | 6 |
| Table 5. | Electrical characteristics of L7908C | 7 |
| Table 6. | Electrical characteristics of L7912AC | 8 |
| Table 7. | Electrical characteristics of L7912C | 8 |
| Table 8. | Electrical characteristics of L7915AC | 9 |
| Table 9. | Electrical characteristics of L7915C | 10 |
| Table 10. | TO-220 (single gauge) package mechanical data | 14 |
| Table 11. | TO-220 type A package mechanical data | 16 |
| Table 12. | TO-220FP package mechanical data | 18 |
| Table 13. | D ² PAK (TO-263) type A package mechanical data | 20 |
| Table 14. | D ² PAK tape and reel mechanical data | 23 |
| Table 15. | Order codes | 24 |
| Table 16. | Document revision history | 25 |

List of figures

| | | |
|-------------------|--|----|
| Figure 1. | Schematic diagram | 2 |
| Figure 2. | Pin connections (top view) | 3 |
| Figure 3. | Test circuit | 5 |
| Figure 4. | Fixed output regulator | 11 |
| Figure 5. | Split power supply ($\pm 15\text{ V} - 1\text{ A}$) | 11 |
| Figure 6. | Circuit for increasing output voltage | 12 |
| Figure 7. | High current negative regulator ($-5\text{ V} / 4\text{ A}$ with 5 A current limiting) | 12 |
| Figure 8. | TO-220 (single gauge) package outline | 13 |
| Figure 9. | TO-220 type A package outline | 15 |
| Figure 10. | TO-220FP package outline | 17 |
| Figure 11. | D ² PAK (TO-263) type A package outline | 19 |
| Figure 12. | D ² PAK (TO-263) recommended footprint (dimensions are in mm) | 21 |
| Figure 13. | D ² PAK tape outline | 22 |
| Figure 14. | D ² PAK reel outline | 23 |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

单击下面可查看定价，库存，交付和生命周期等信息

[>>STMicroelectronics\(意法半导体\)](#)