


## 1000 V - 1 A high efficiency ultrafast diode


**Features**

- Low forward voltage drop
- High reliability
- High surge current capability
- Soft switching for reduced EMI disturbances
- Planar technology
- ECOPACK2 compliant

**Applications**

- Switching diode
- Auxiliary power supply

**Description**

The STTH110, which is using ST ultrafast high voltage planar technology, is especially suited for free-wheeling, clamping, snubbing, demagnetization in power supplies and other power switching applications.

Product status	
STTH110	
Product summary	
Symbol	Value
$I_{F(AV)}$	1 A
$V_{RRM}$	1000 V
$T_{j(max.)}$	175 °C
$V_{F(typ.)}$	1.42 V

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		1000	V
$V_{RMS}$	Voltage rms		700	V
$I_{F(AV)}$	Average forward current $\delta = 0.5$ , square wave	SMA $T_L = 125\text{ °C}$	1	A
		DO-41 $T_L = 100\text{ °C}$		
$I_{FSM}$	Surge non repetitive forward current	SMA	18	A
		DO-41 $t_p = 8.3\text{ ms sinusoidal}$	20	
$T_{stg}$	Storage temperature range		-50 to +175	°C
$T_j$	Maximum operating junction temperature		+175	°C

**Table 2. Thermal resistance parameter**

Symbol	Parameter		Max. value	Unit
$R_{th(j-l)}$	Junction to lead	SMA	30	°C/W
	Junction to lead	Lead length = 10 mm	45	
$R_{th(j-a)}$	Junction to ambient		DO-41	

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics**

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	$V_R = 1000\text{ V}$	-		10	$\mu\text{A}$
		$T_j = 125\text{ °C}$		-		50	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	$I_F = 1\text{ A}$	-		1.7	V
		$T_j = 150\text{ °C}$		-	0.98	1.42	

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 1.20 \times I_{F(AV)} + 0.225 \times I_F^2_{(RMS)}$$

For more information, please refer to the following application notes related to the power losses :

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

**Table 4. Dynamic characteristics ( $T_j = 25\text{ °C}$  unless otherwise stated)**

Symbol	Parameters	Test conditions	Min.	Typ.	Max.	Unit
$t_{rr}$	Reverse recovery time	$I_F = 0.5\text{ A}$ , $I_{rr} = 0.25\text{ A}$ , $I_R = 1\text{ A}$	-	-	75	ns
$t_{fr}$	Forward recovery time	$I_F = 1\text{ A}$ , $di_F/dt = 50\text{ A}/\mu\text{s}$ , $V_{FR} = 1.1 V_{F(max)}$	-	-	300	ns
$V_{FP}$	Forward recovery voltage		-	-	18	V

### 1.1 Characteristics (curves)

Figure 1. Conduction losses versus average current

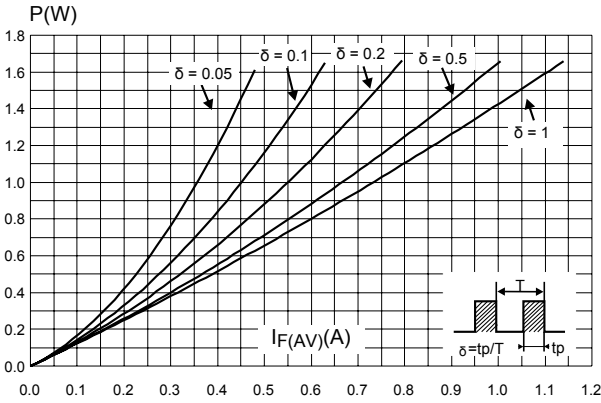


Figure 2. Forward voltage drop versus forward current (typical values)

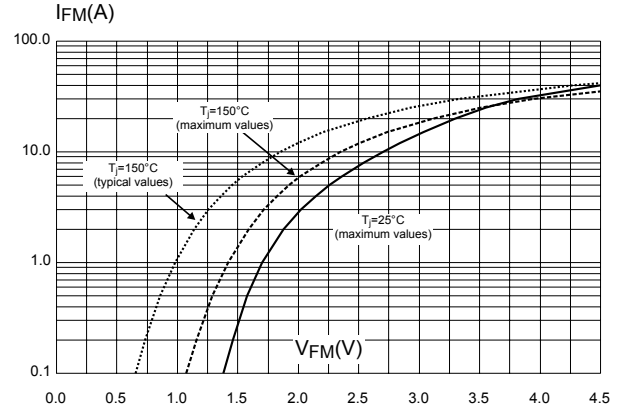


Figure 3. Relative variation of thermal impedance junction to ambient versus pulse duration (DO-41)

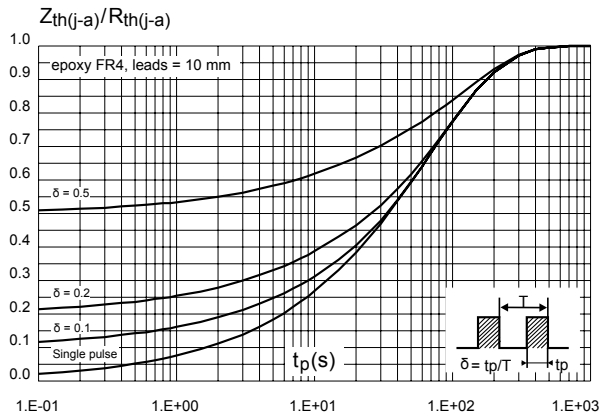
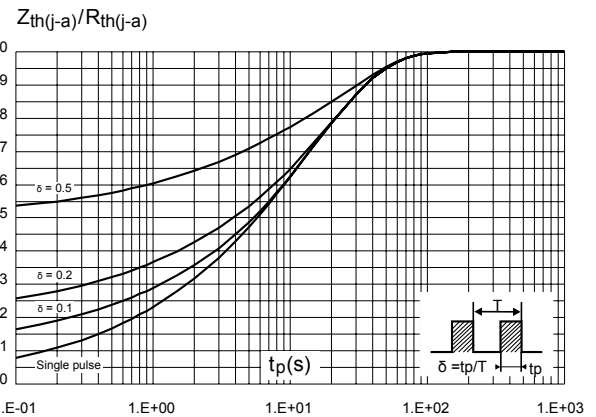
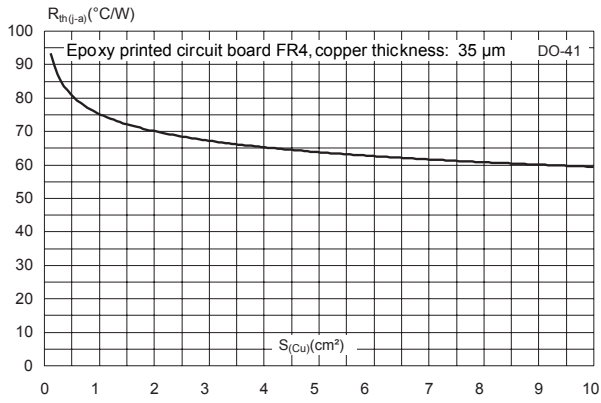



Figure 4. Relative variation of thermal impedance junction to ambient versus pulse duration(SMA)



**Figure 5. Thermal resistance junction to ambient versus copper surface under each lead (DO-41)**



**Figure 6. Thermal resistance junction to ambient versus copper surface under each lead (typical values) (SMA)**

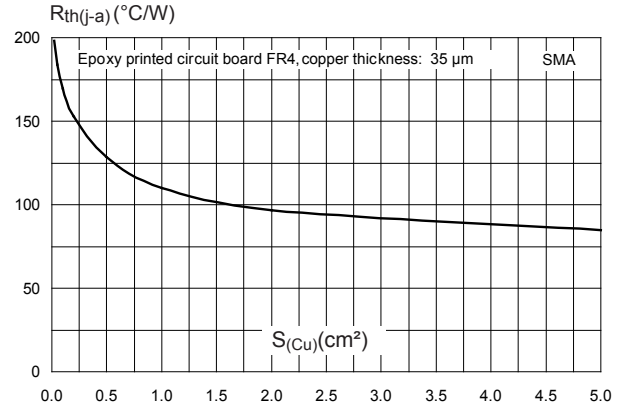

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 DO-41 package information

- Epoxy meets UL 94, V0
- Band indicates cathode
- Bending method (DO-41): see Application note AN1471

Figure 7. DO-41 package outline

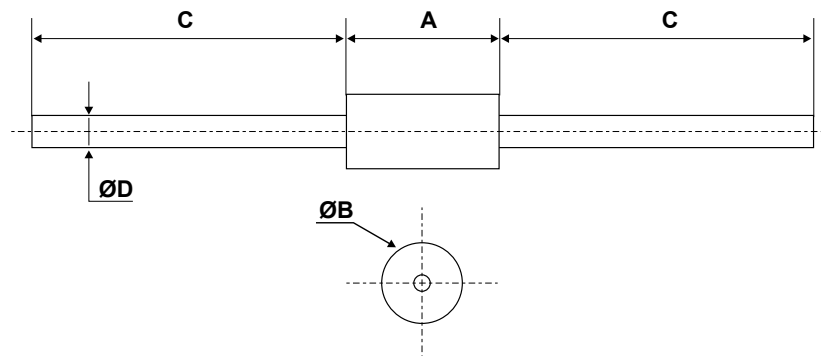


Table 5. DO-41 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.07	-	5.20	0.160	-	0.205
B	2.04	-	2.71	0.080	-	0.107
C	25.40	-		1.000	-	
D	0.71	-	0.86	0.028	-	0.0034

## 2.2 SMA package information

- Epoxy meets UL94, V0
- Cooling method : by conduction (C)

Figure 8. SMA package outline


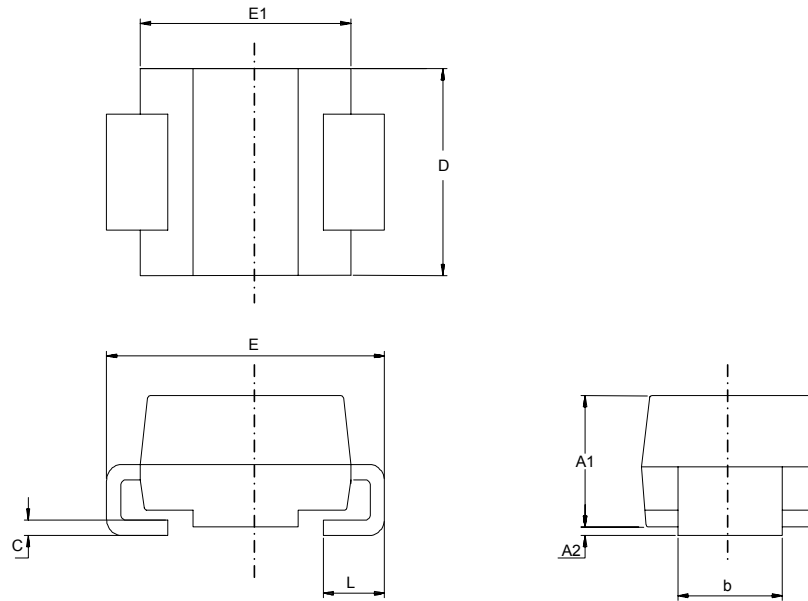


Table 6. SMA package mechanical data

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.074	0.097
A2	0.05	0.20	0.001	0.008
b	1.25	1.65	0.049	0.065
c	0.15	0.40	0.005	0.016
D	2.25	2.90	0.088	0.115
E	4.80	5.35	0.188	0.211
E1	3.95	4.60	0.155	0.182
L	0.75	1.50	0.029	0.060

Figure 9. SMA recommended footprint in mm (inches)



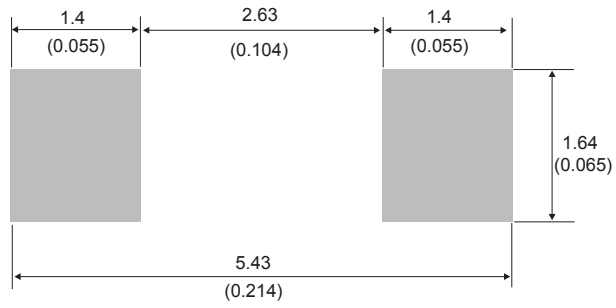

### 3 Ordering information

**Table 7. Ordering information**

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH110	STTH110	DO-41	0.34 g	2000	Ammopack
STTH110A	H10	SMA	0.068 g	5000	Tape and reel 13"
STTH110RL	STTH110	DO-41	0.34 g	5000	Tape and reel 13"

## Revision history

**Table 8. Document revision history**

Date	Revision	Changes
Jan-2003	1	Initial release.
30-Sept-2009	2	Updated Table 8.
20-Dec-2013	3	Updated Table 4.
11-Dec-2019	4	Updated <a href="#">Table 3</a> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

单击下面可查看定价，库存，交付和生命周期等信息

[>>STMicroelectronics\(意法半导体\)](#)