

CPFC8D55



◆ Features


- Small size & large current
- Size: 9.0 × 9.3 × H 6.0mm (Max.)
- SMD type & available foreflow soldering
- RoHS compliance




◆ Application

- EMI filter for various equipment

◆ Dimension & Circuit (mm)

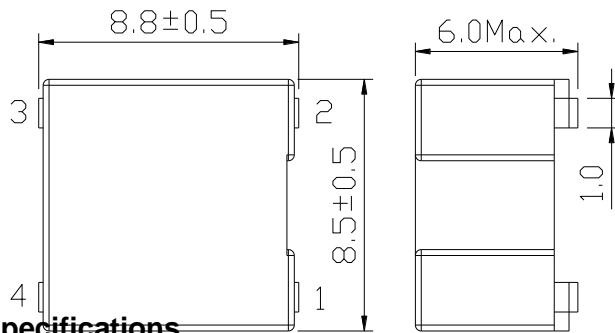


◆ Schematics (Bottom)

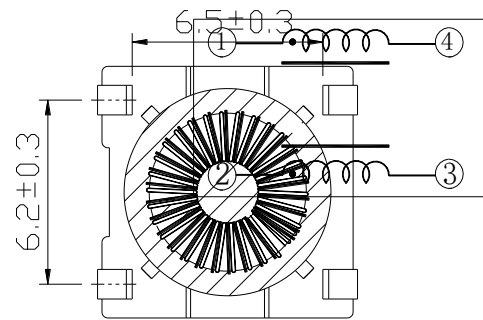

◆ Specifications

Parts No. 品名	Inductance インダクタンス @100kHz	Common Mode Attenuation コモンモード減衰特性 (Typ.)			D.C.R 直流抵抗 (1-2)(3-4)	Rated Current 定格電流	Withstand Voltage 耐電圧
		100kHz	1MHz	10MHz			
CPFC8D55NP-471	0.47mH±40%	10dB	20dB	24dB	Max. 0.13Ω	Max. 1.6A	AC 500Vrms
CPFC8D55NP-472	4.7mH±30%	28dB	40dB	35dB	Max. 1.0Ω	Max. 0.4A	AC 500Vrms
CPFC8D55NP-902	9.0mH±30%	35dB	45dB	35dB	Max. 1.6Ω	Max. 0.3A	AC 500Vrms

◆ Impedance Characteristics

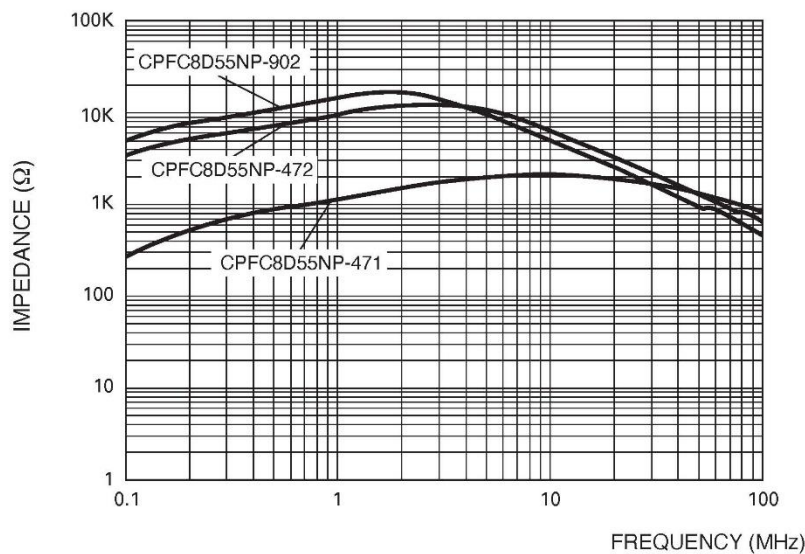

单击下面可查看定价，库存，交付和生命周期等信息

[>>Sumida Corporation\(胜美达\)](#)