


Wire Wound Chip Balun Transformer – BW Series



Operating temp. : -40°C ~+ 85°C

- FEATURES**
- ◆ Winding structure and small size
 - ◆ Surface mount type
 - ◆ Low insertion loss at frequency range
 - ◆ Excellent solderability


- APPLICATIONS**
- ◆ Balanced unbalanced transformation between antenna and cable (TV tuner)

PRODUCT IDENTIFICATION

1	2	3	4	5	6	7	8	9
B	W	21	S	75	11	A01	T	F

<p>1</p> <table border="1"> <tr><th colspan="2">Type</th></tr> <tr><td>B</td><td>Chip Balun Transformer</td></tr> </table>	Type		B	Chip Balun Transformer	<p>2</p> <table border="1"> <tr><th colspan="2">Structure</th></tr> <tr><td>W</td><td>Winding Type</td></tr> </table>	Structure		W	Winding Type	<p>3</p> <table border="1"> <tr><th colspan="2">External Dimensions (L×W) (MM)</th></tr> <tr><td>21</td><td>2.0×1.2</td></tr> <tr><td>43</td><td>4.5×3.2</td></tr> </table>	External Dimensions (L×W) (MM)		21	2.0×1.2	43	4.5×3.2		
Type																		
B	Chip Balun Transformer																	
Structure																		
W	Winding Type																	
External Dimensions (L×W) (MM)																		
21	2.0×1.2																	
43	4.5×3.2																	
<p>4</p> <table border="1"> <tr><th colspan="2">Type of Transformer</th></tr> <tr><td>S</td><td>Standard</td></tr> <tr><td>C</td><td>Internal Code</td></tr> </table>	Type of Transformer		S	Standard	C	Internal Code	<p>5</p> <table border="1"> <tr><th colspan="2">Port Impedance</th></tr> <tr><td>75</td><td>75Ω</td></tr> <tr><td>50</td><td>50Ω</td></tr> </table>	Port Impedance		75	75Ω	50	50Ω	<p>6</p> <table border="1"> <tr><th colspan="2">Impedance Ratio</th></tr> <tr><td>11</td><td>1:1 One to One</td></tr> </table>	Impedance Ratio		11	1:1 One to One
Type of Transformer																		
S	Standard																	
C	Internal Code																	
Port Impedance																		
75	75Ω																	
50	50Ω																	
Impedance Ratio																		
11	1:1 One to One																	
<p>7</p> <table border="1"> <tr><th colspan="2">Characteristic Code</th></tr> <tr><td>A01</td></tr> <tr><td>B02</td></tr> <tr><td>C01</td></tr> <tr><td>D01</td></tr> <tr><td>E01</td></tr> </table>	Characteristic Code		A01	B02	C01	D01	E01	<p>8</p> <table border="1"> <tr><th colspan="2">Packing</th></tr> <tr><td>T</td><td>Tape Carrier Package</td></tr> </table>	Packing		T	Tape Carrier Package	<p>9</p> <table border="1"> <tr><th colspan="2">Hazardous Substance Free Products</th></tr> <tr><td>F</td></tr> </table>	Hazardous Substance Free Products		F		
Characteristic Code																		
A01																		
B02																		
C01																		
D01																		
E01																		
Packing																		
T	Tape Carrier Package																	
Hazardous Substance Free Products																		
F																		


SHAPE AND DIMENSIONS

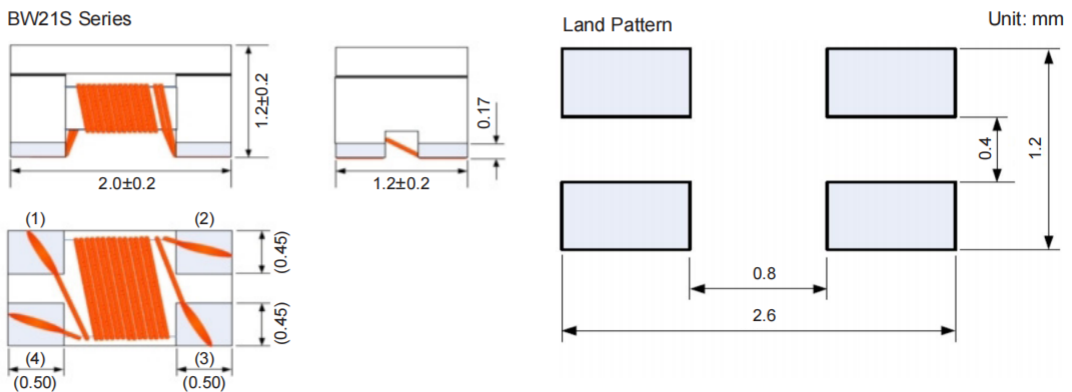

Multilayer Chip LC Filter
Multilayer Chip Balun
Multilayer Chip Diplexer
Multilayer Chip Triplexer
Multilayer Chip LC Coupler
Multilayer Chip Antenna
Wire Wound Chip Balun Transformer
Ceramic Dielectric Filter


SHAPE AND DIMENSIONS

BW21C Series

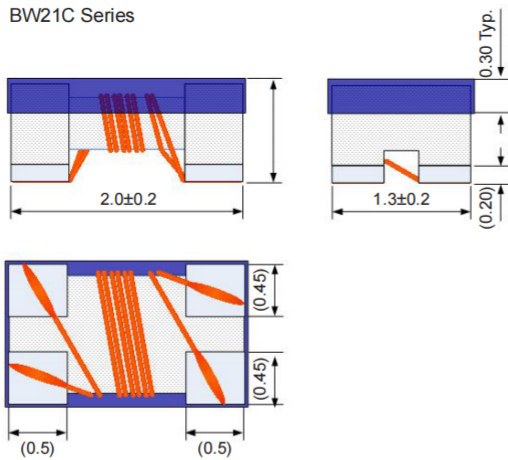


Land Pattern

Unit: mm

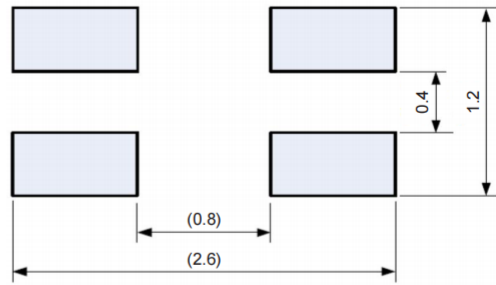


BW43S Series

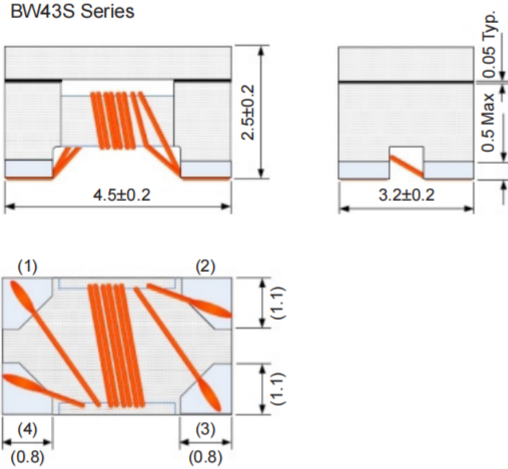

Land Pattern

Unit: mm

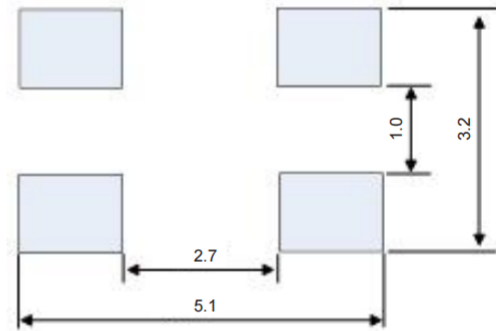

SPECIFICATIONS

BW21S TYPE

Part Number	Freq. Range	Port Impedance	Insertion Loss at Freq. Range	CMRR at Freq. Range(Min.)	Rated Power
Units	MHz	Ω	dB	dB	dBm
BW21S7511A01TF	45~870	75/75	1.0	20	27
BW21S5011A01TF	45~870	50/50	1.2	20	27
BW21S7511B02TF	50~1200	75/75	1.2	20	27
BW21S7511C01TF	1000~1500	75/75	1.4	20	27
BW21S7511D01TF	950~2150	75/75	1.5	20	27
BW21S7511E01TF	400~1800	75/75	2.0	10	27

BW21C TYPE


Part Number	Freq. Range	Port Impedance	Inductance	Insertion Loss	Return Loss	DC Resistance	Rated Current	CMRR	Insulation Resistance
Units	MHz	Ω	μ H	dB	dB	Ω	mA	dB	M Ω
BW21C2511A01TF	13.56	25/25	1.0 Min.	1.0 Max.	13 Typ.	0.75 Max.	220 Min.	47 Min.	10 Min.

SPECIFICATIONS BW43S TYPE


Part Number	Freq. Range	Port Impedance	Inductance @50MHz	Insertion Loss	DC Resistance	Rated Current	Rated Voltage	Insulation Resistance (M Ω)
Units	MHz	Ω	μ H	dB	Ω	mA	VDC	dB
BW43S5011C01TF	4~200	50/50	1.25 Typ.	2.52 Typ.	0.40 Max.	540 Max.	50	10 Min.
BW43S5011E01TF	48~645	50/50	1.00 Typ.	6.66 Typ.	0.15 Max.	960 Max.	50	10 Min.

※Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.


EQUIVALENT CIRCUIT

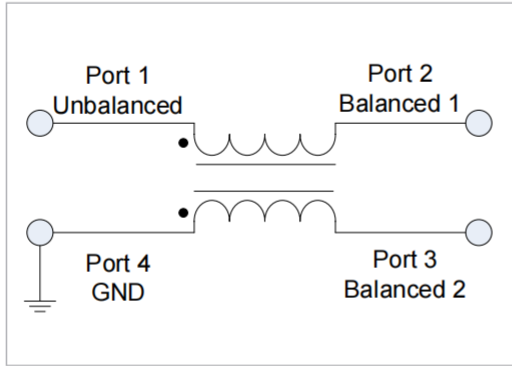

BW21S

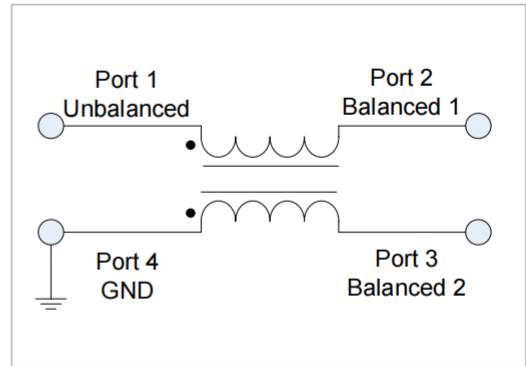



BW21C

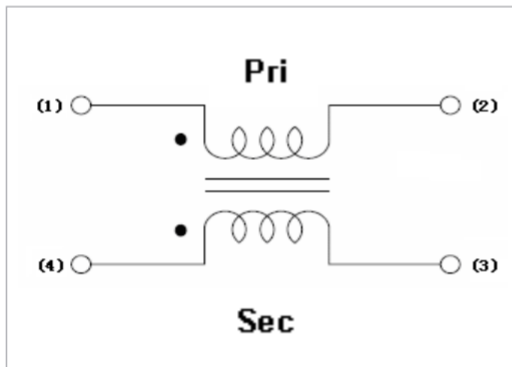

BW43S


TYPICAL ELECTRICAL CHARACTERISTICS

BW21S7511A01TF

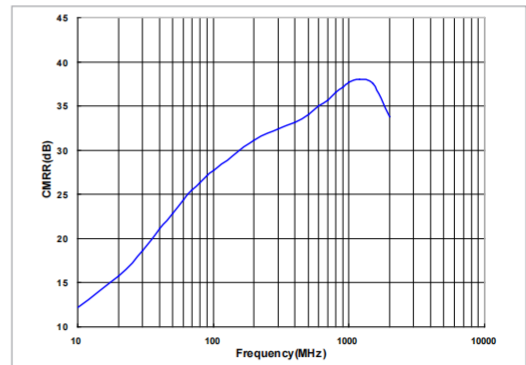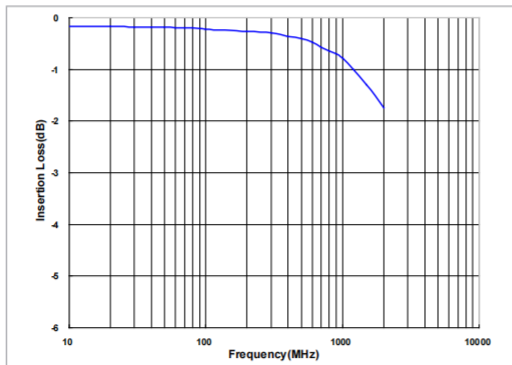


**TYPICAL
ELECTRICAL
CHARACTERISTICS**


BW21S5011A01TF
Insertion Loss Characteristics

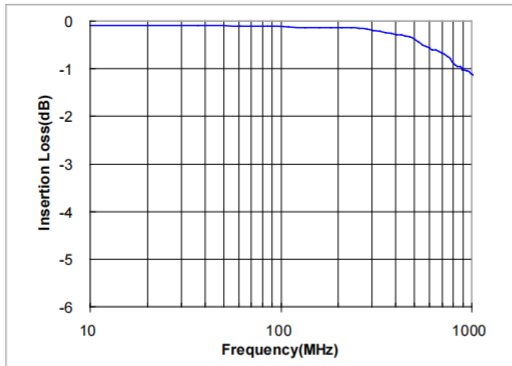


CMRR Characteristics

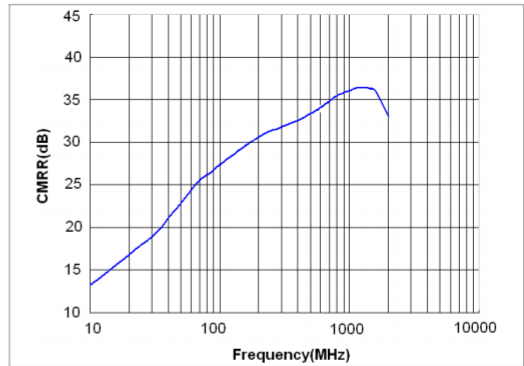


BW21S7511B02TF
Insertion Loss Characteristics

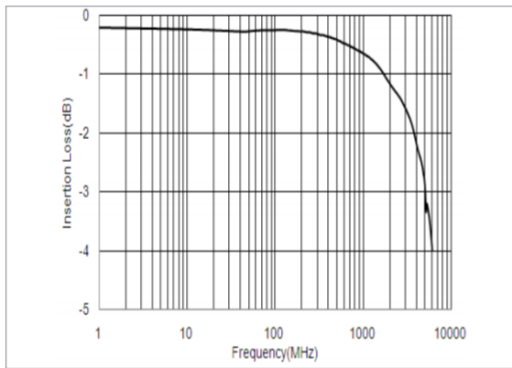


CMRR Characteristics

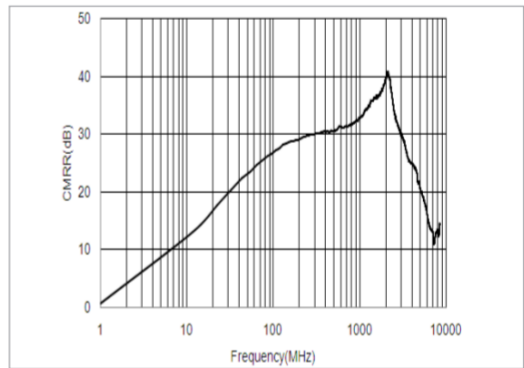


BW21S7511C01TF
Insertion Loss Characteristics

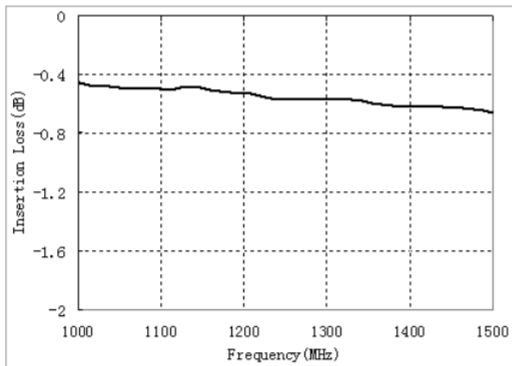


CMRR Characteristics

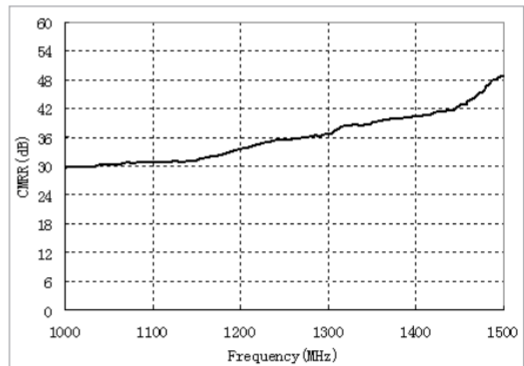

BW21S7511D01TF
Insertion Loss Characteristics

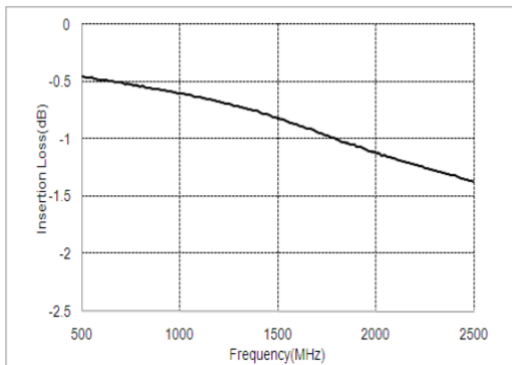


CMRR Characteristics

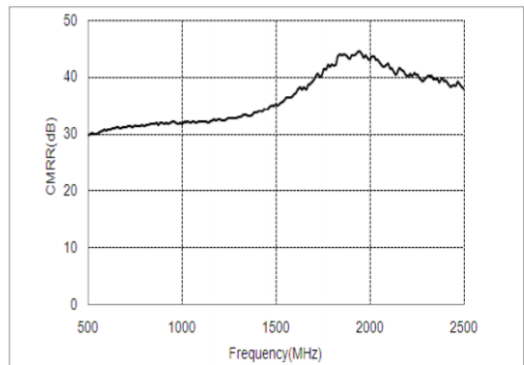


TYPICAL ELECTRICAL CHARACTERISTICS



BW21S7511E01TF
Insertion Loss Characteristics

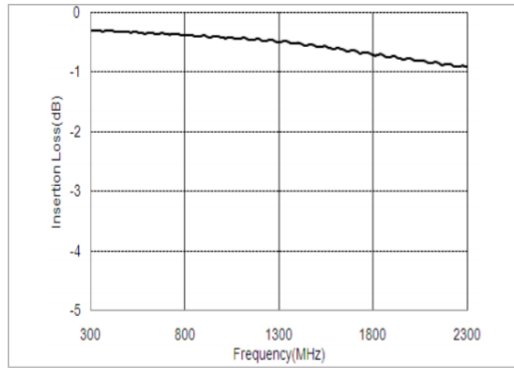



CMRR Characteristics

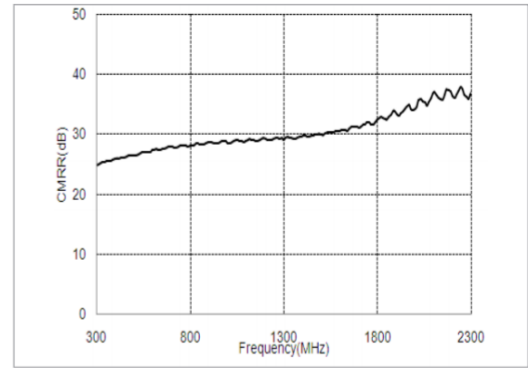


BW21C2511A01TF

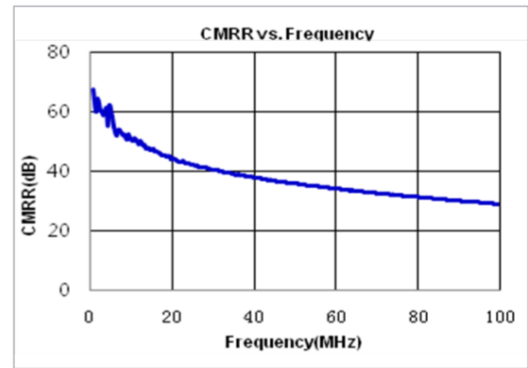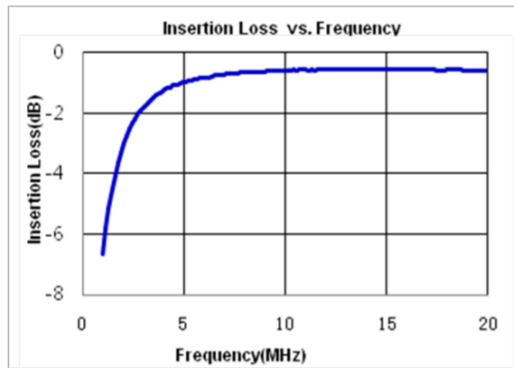

BW21C2511A01TF

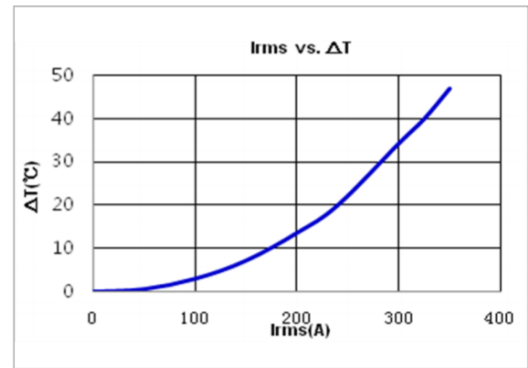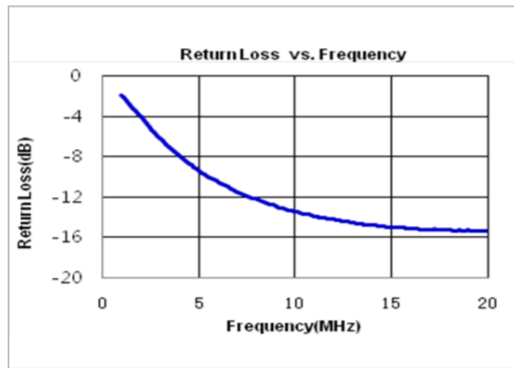

BW43S5011C01TF/BW43S5011E01TF

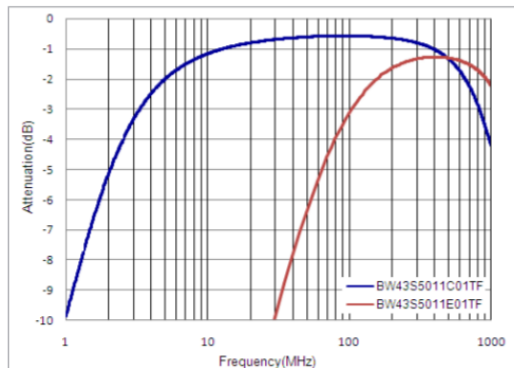

单击下面可查看定价，库存，交付和生命周期等信息

[>>Sunlord\(顺络\)](#)