


# Multilayer Chip Common Mode Filter– SDMM Series

Operating Temp. : -40°C~+85°C



## FEATURES

- Effective for suppressing common mode noise at high frequency
- Excellent solderability characteristics
- Small size & low profile (0.85\*0.65\*0.40 mm)
- Multilayer type SMD component based on LTCC technology


## APPLICATIONS

- Common mode noise suppression of high speed differential signal lines, such as MIPI, MHL in mobile phone, tablet PC etc.

## PRODUCT IDENTIFICATION

<u>SDMM</u> ①	<u>0806</u> ②	<u>H</u> ③	<u>-2</u> ④	<u>900</u> ⑤	<u>T</u> ⑥													
①	②	③	④	⑤	⑥													
<table border="1"> <tr><td>Type</td></tr> <tr><td>SDMM Multilayer Chip Common Mode Filter</td></tr> </table>	Type	SDMM Multilayer Chip Common Mode Filter	<table border="1"> <tr><td>External Dimensions (LxW) (mm)</td></tr> <tr><td>0806 0.85x0.65</td></tr> </table>	External Dimensions (LxW) (mm)	0806 0.85x0.65	<table border="1"> <tr><td>Feature Type</td></tr> <tr><td>H For High-Speed Differential Signal Lines</td></tr> <tr><td>U For Ultra high speed Differential Signal Lines</td></tr> </table>	Feature Type	H For High-Speed Differential Signal Lines	U For Ultra high speed Differential Signal Lines	<table border="1"> <tr><td>Common Mode Impedance (Ω)</td></tr> <tr><td>Example Nominal Value</td></tr> <tr><td>350 35</td></tr> <tr><td>900 90</td></tr> </table>	Common Mode Impedance (Ω)	Example Nominal Value	350 35	900 90	<table border="1"> <tr><td>Packing</td></tr> <tr><td>T Tape &amp; Reel</td></tr> </table>	Packing	T Tape & Reel	
Type																		
SDMM Multilayer Chip Common Mode Filter																		
External Dimensions (LxW) (mm)																		
0806 0.85x0.65																		
Feature Type																		
H For High-Speed Differential Signal Lines																		
U For Ultra high speed Differential Signal Lines																		
Common Mode Impedance (Ω)																		
Example Nominal Value																		
350 35																		
900 90																		
Packing																		
T Tape & Reel																		
<table border="1"> <tr><td>Number of Lines</td></tr> <tr><td>2 2 Lines</td></tr> </table>	Number of Lines	2 2 Lines																
Number of Lines																		
2 2 Lines																		


## SHAPE, DIMENSIONS AND LAND-PATTERN

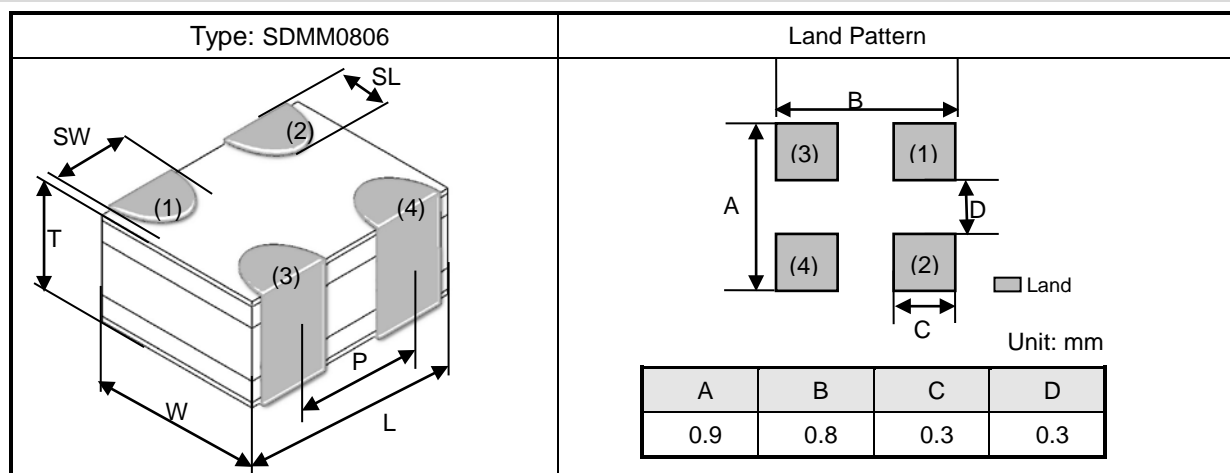

Unit: mm [inch]

Type	L	W	T	SL	SW	P
SDMM0806	0.85±0.05 [.033±.002]	0.65±0.05 [.026±.002]	0.40±0.05 [.016±.002]	0.20+0.05/-0.10 [.008+.002/-0.004]	0.27±0.05 [.011±.002]	0.50±0.05 [.020±.002]

# EQUIVALENT CIRCUIT

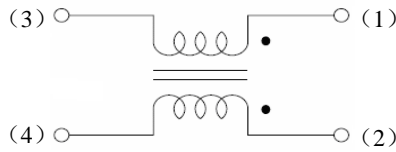

# SPECIFICATIONS

## SDMM0806H-2\_ T Series





Part Number	Common Mode Impedance @ 100MHz	Max. DC Resistance	Max. Rated Current	Rated Voltage	Withstand Voltage	Min. Insulation Resistance
Units	$\Omega$	$\Omega$	mA	Volts	Volts	M $\Omega$
Symbol	Z	DCR	I <sub>r</sub>	V <sub>DC</sub>	V <sub>P</sub>	IR
SDMM0806H-2-120T	12±5	2.5	130	5	12.5	100
SDMM0806H-2-350T	35±20%	3.0	100	5	12.5	100
SDMM0806H-2-470T	47±20%	3.5	100	5	12.5	100
SDMM0806H-2-900T	90±20%	4.0	100	5	12.5	100

## SDMM0806U-2\_ T Series

Part Number	Common Mode Impedance @ 100MHz	Max. DC Resistance	Max. Rated Current	Rated Voltage	Min. Insulation Resistance	Cutoff Frequency (typ.)
Units	$\Omega$	$\Omega$	mA	Volts	M $\Omega$	GHz
Symbol	Z	DCR	I <sub>r</sub>	V <sub>DC</sub>	IR	f <sub>0</sub>
SDMM0806U-2-350TB01	35±20%	3.5	100	5	100	>6
SDMM0806U-2-900TB01	90±20%	4.5	100	5	100	3.5



# ELECTRICAL CHARACTERISTICS

## SDMM0806H-2\_ T Series

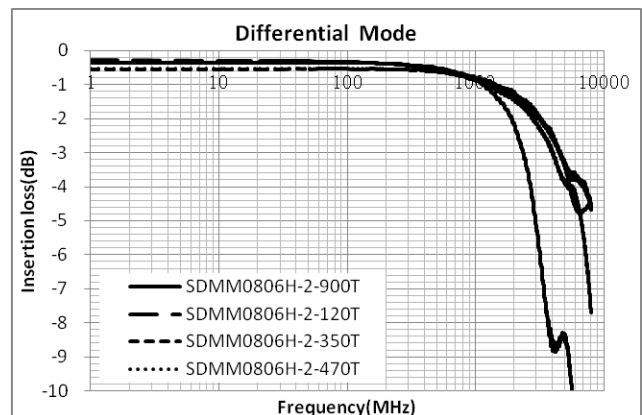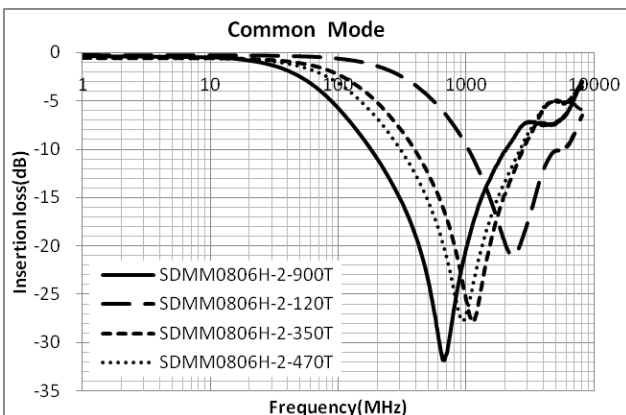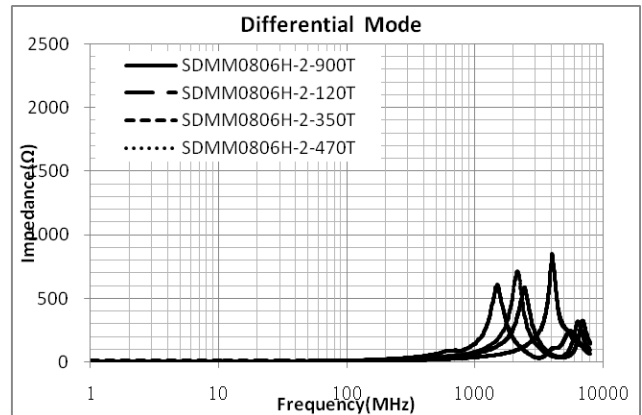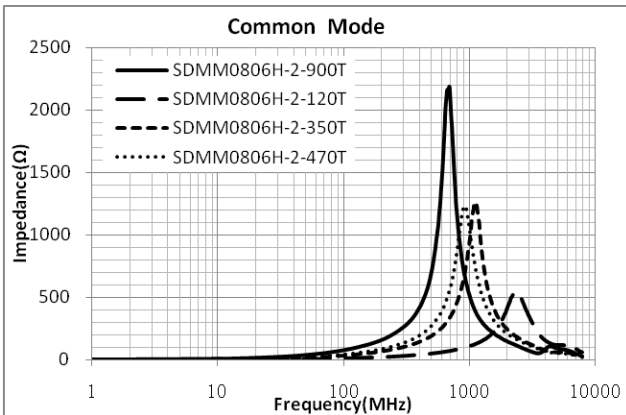

# ELECTRICAL CHARACTERISTICS

SDMM0806U-2-\_T Series

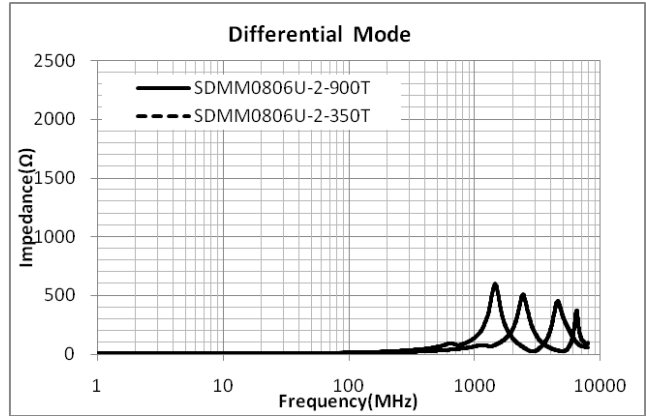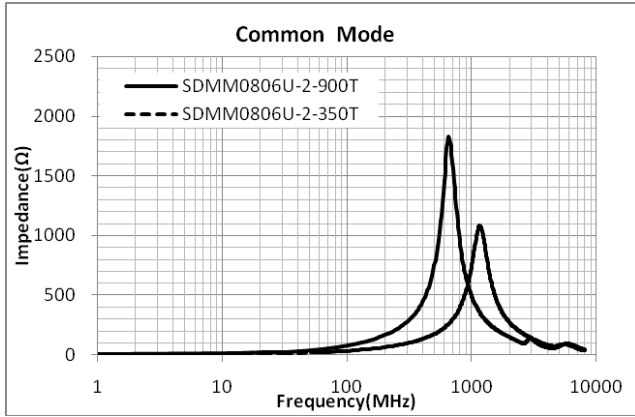

单击下面可查看定价，库存，交付和生命周期等信息

[>>Sunlord\(顺络\)](#)