

VOLTAGE RANGE: 20 KV
CURRENT: 20 mA

Features


- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



Outline Drawings : mm

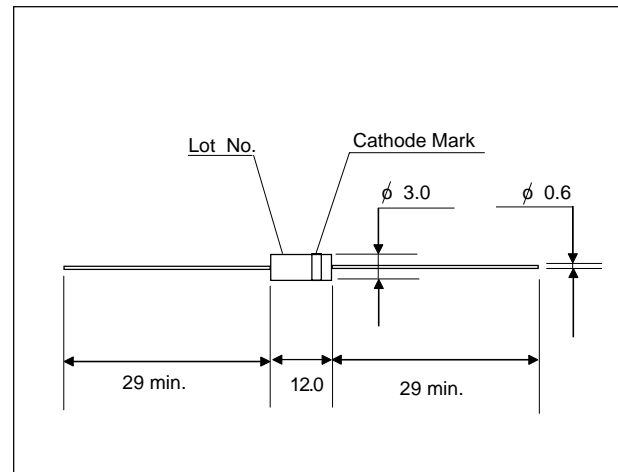

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Characteristic	Symbols	ESJA20-20A	Units
Repetitive Peak Reverse Voltage	V _{RRM}	20	kV
Average Output Current Ta=25°C, Resistive Load	I _o	20	mA
Suege Current	I _{FSM}	1.0	A
Maximum Forward Voltage Drop at 25°C, I _F = I _{F(AV)}	V _F	45	V
Maximum Reverse Current at 25°C at 100°C	V _{RRM}	3.0	uA
		30	uA
Maximum Reverse Recovery Time at 25°C	T _{rr}	100	nS
Junction Capacitance at 25°C, V _R =0V, f=1MHz	C _j	1.0	pF
Junction Temperature	T _j	125	°C
Allowable Operation Case Temperature	T _c	125	°C
Storage Temperature	T _{stg}	-40 to +125	°C

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)