


**VOLTAGE RANGE: 3.3V**  
**POWER: 600Watts**


### Features

- Working peak reverse voltage range – 3.3V.
- Low profile package.
- Excellent clamping capability.
- Fast response time: typically less than 1 ns for Uni-direction. from 0 Volts to BV min
- Plastic material has UL flammability classification 94V-O
- RoHS compliant in lead-free versions



### Mechanical Data

- Case: SMB/DO-214AA, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

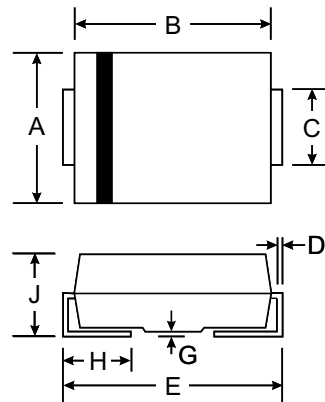

SMB(DO-214AA)		
Dim	Min	Max
A	3.30	3.94
B	4.06	4.70
C	1.91	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Parameter	Symbol	Value	Units
Peak Pulse Current of on 10/1000us Waveform (Note 1, FIG.3)	$I_{PPM}$	See Table 1	Amps
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load, (JEDEC Method) (Note 2. 3)	$I_{FSM}$	100	Amps
Operating Junction Temperature Range	$T_J$	-55 to 150	°C
Storage Temperature Range	$T_{STG}$	-55 to 150	°C

#### Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.
2. Mounted on  $5.0\text{mm}^2$  (0.03mm thick) Copper Pads to each terminal.
3. 8.3 ms single half sine-wave, or equivalent square wave, Duty cycle=4 pluses per minute maximum.

### Electrical Specification @ Tamb 25°C

Type Number	Marking	Breakdown Voltage Min. @ $I_T$	Test Current	Reverse Stand-Off Voltage	Maximum Reverse Leakage @ $V_{RMW}$	Maximum Clamping Voltage @ $I_{PP}$ 10/1000us	Peak Pulse Current	
		$V_{BR MIN}(V)$	$I_T (mA)$	$V_{RMW}(V)$	$I_R(\mu A)$	$V_C(V)$	$I_{PP}(A)$	
SMBJ3.3A	KC	4.1	1	3.3	200.0	7.3	50	

### Ratings and Characteristic Curves $T_A=25^\circ C$ unless otherwise noted

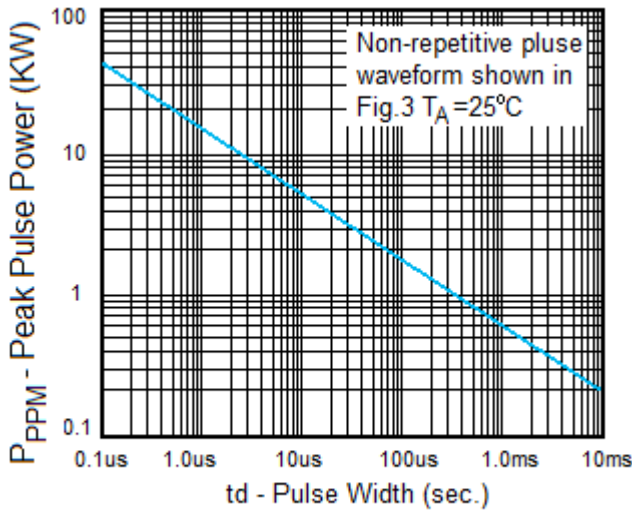


Fig. 1 Peak Pulse Power Rating

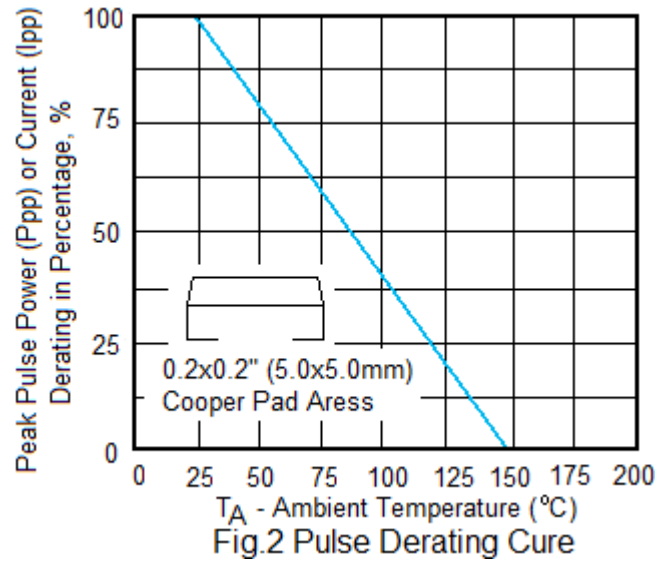


Fig.2 Pulse Derating Curve

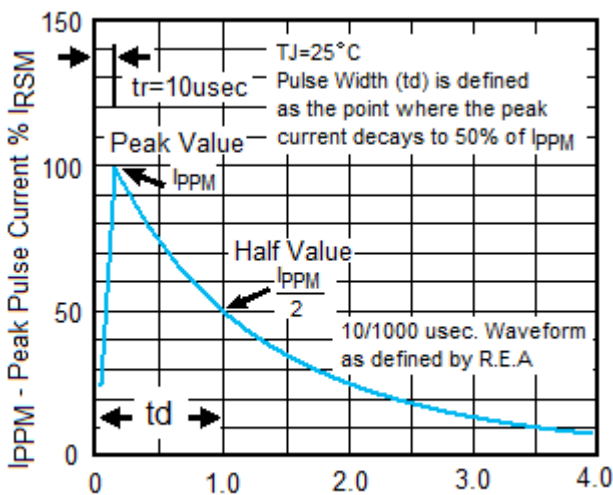


Fig.3 Pulse Waveform

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)