




Features

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Fast Switching Time
- Low Reverse Capacitance
- Surface Mount Package Ideally Suited for Automatic Insertion

Mechanical Data

- Case: SOD-123FL
plastic body over passivated junction
- Terminals : Plated axial leads,
- solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Marking : W
- Weight: 0.0007 ounce, 0.02 grams



SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55
All Dimensions in mm			

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Power Dissipation (Infinite Heatsink)	P_D	400 ⁽¹⁾	mW
Maximum Single Cycle Surge 10 μs Square Wave	I_{FSM}	2	A
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	0.3 ⁽¹⁾	$^\circ\text{C}/\text{mW}$
Junction Temperature	T_J	125 ⁽¹⁾	$^\circ\text{C}$
Storage temperature range	T_S	-55 to +150 ⁽¹⁾	$^\circ\text{C}$

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 10 \mu\text{A}$	60	-	-	V
Reverse Current	I_R	$V_R = 50 \text{ V}$	-	-	200	nA
Forward Voltage Drop	V_F	$I_F = 1 \text{ mA}$ $I_F = 15 \text{ mA}$	-	-	0.41 1.0	V
Diode Capacitance	Cd	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$	-	-	2.2	pF
Reverse Recovery Time	T_{rr}	$I_F = I_R = 5 \text{ mA}$, recover to $0.1 I_R$	-	-	1	ns

Note:


(1) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature..

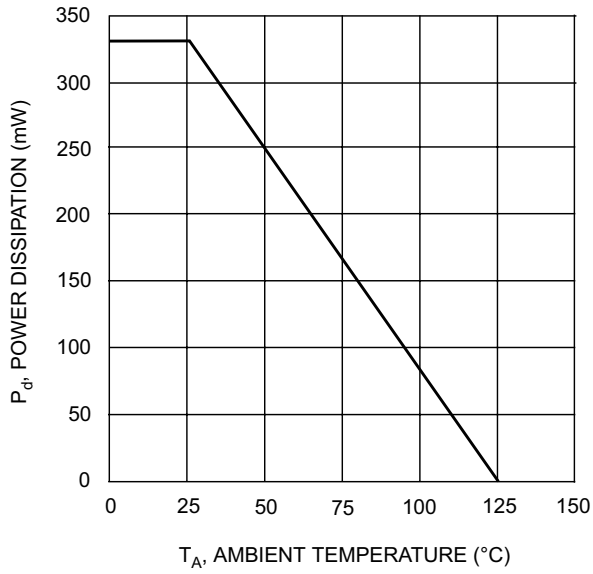


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1 Power Derating Curve

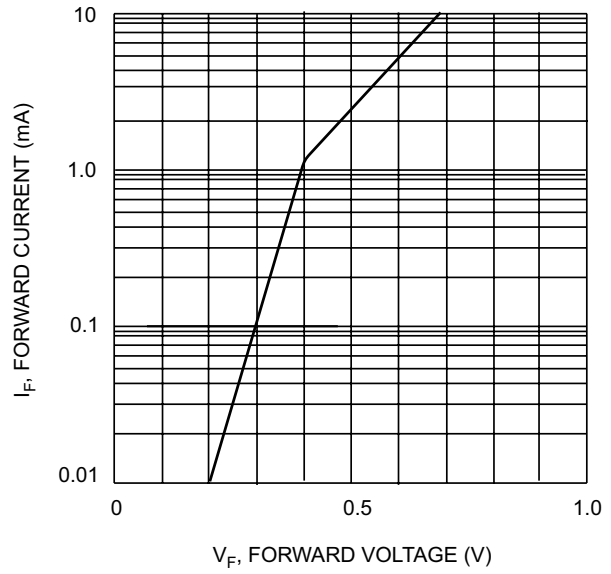

V_F , FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics

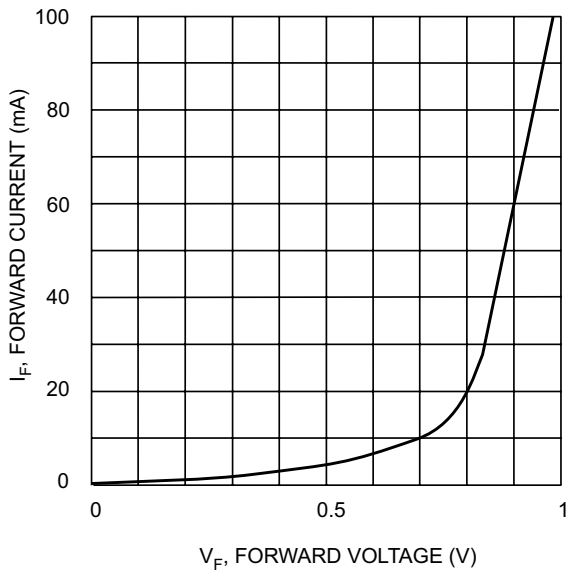

V_F , FORWARD VOLTAGE (V)
Fig. 3 Typical Forward Characteristics

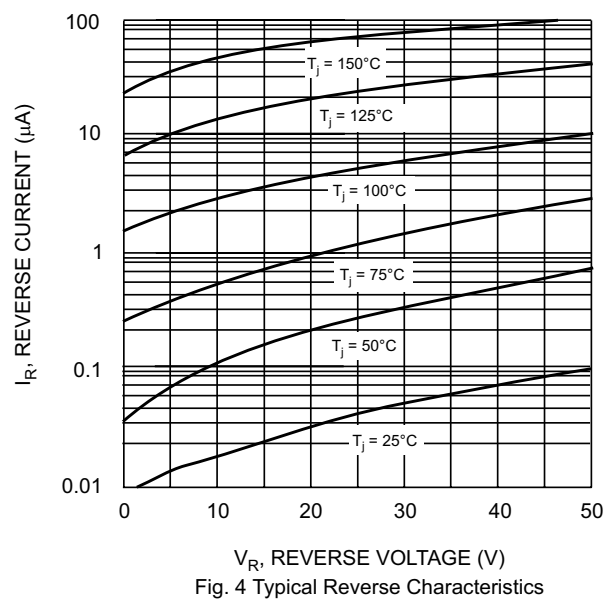

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Reverse Characteristics

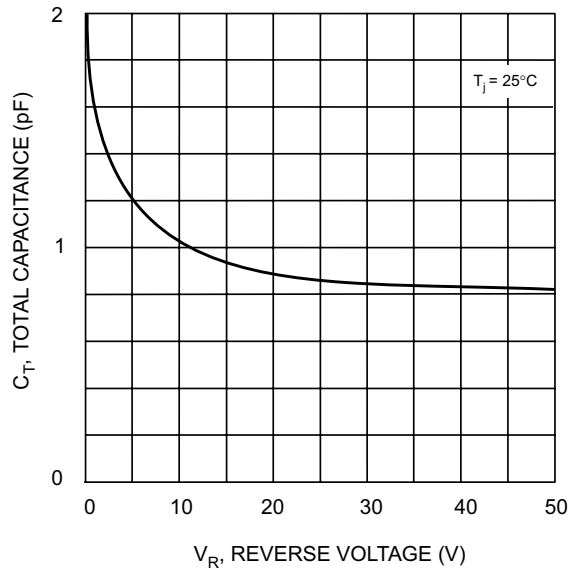


Fig. 5 Typ.Total Capacitance vs Reverse Voltage

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)