


VOLTAGE RANGE: 300 - 400V
CURRENT: 1.0 A




Features

- Highcurrent capability
- Highsurgecurrent capability
- Highreliability
- Lowreversecurrent
- Low forwardvoltage drop
- Superfast recovery time

Mechanical Data

- Case: D O - 4 1 , Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.34 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

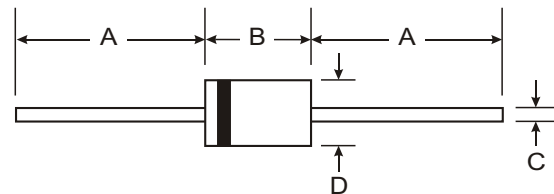

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	11DF3	11DF4	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	300	400	V
Maximum RMS Voltage	V_{RMS}	210	280	V
Maximum DC Blocking Voltage	V_{DC}	300	400	V
Maximum Average Forward Current $T_a = 57^\circ\text{C}$	$I_{F(AV)}$	1.0		A
Maximum Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I_{FSM}	30		A
Maximum Peak Forward Voltage at $I_F = 1.0\text{ A}$	V_F	1.25		V
Maximum DC Reverse Current at V_{RRM}	I_R	10		μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	35		ns
Junction Temperature Range	T_J	- 65 to + 150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 65 to + 150		$^\circ\text{C}$

Note:

(1) Reverse Recovery Test Conditions : $I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$.

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

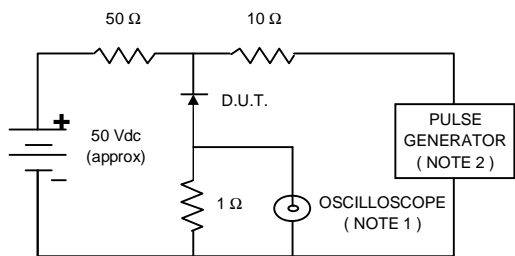

NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.
 2. Rise time = 10 ns max., Source Impedance = 50 ohms.
 3. All Resistors = Non-inductive Types.

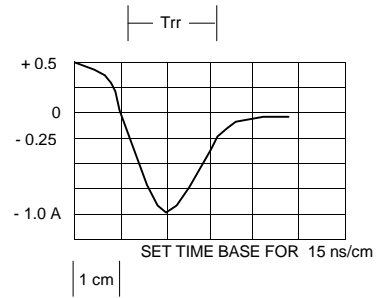


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

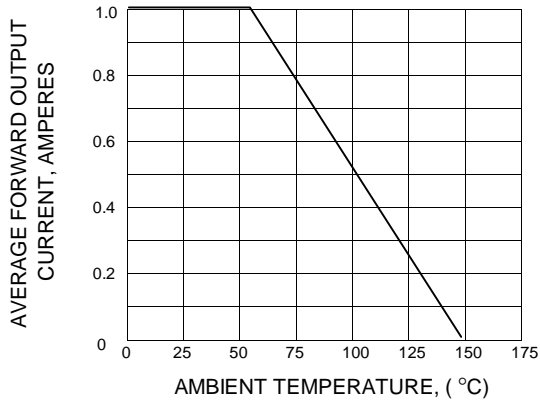


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

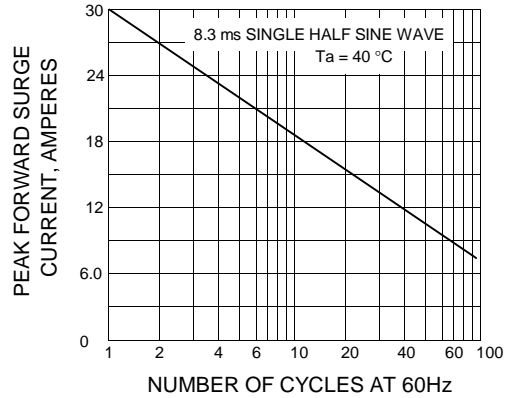


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


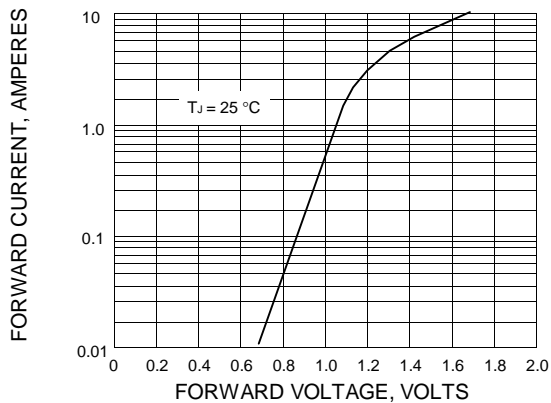


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

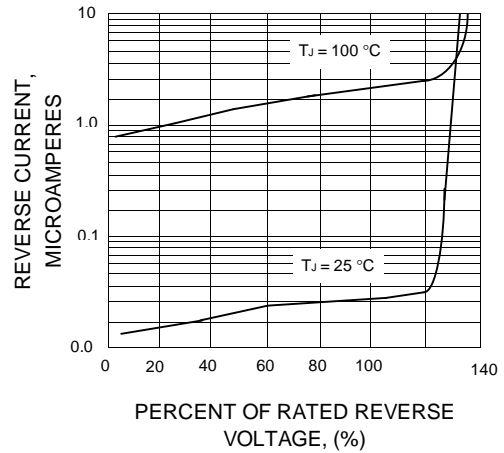

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)