


VOLTAGE RANGE: 50 - 600V
CURRENT: 2.0 A

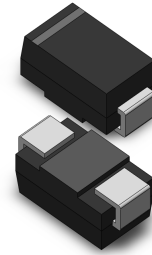


Features

- Glass Passivated Die Construction
- Ideally Suited for Automatic Assembly
- Low Forward Voltage Drop, High Efficiency
- Low Power Loss
- Super-Fast Recovery Time
- Plastic Case Material has UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: SMA/DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight : 0.067 gram

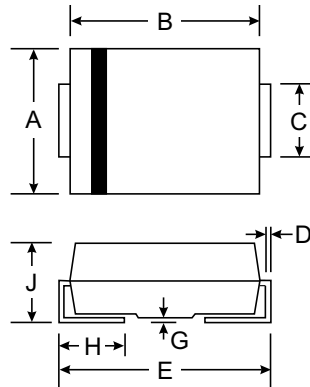

| SMA(DO-214AC) | | |
|----------------------|------|------|
| Dim | Min | Max |
| A | 2.29 | 2.92 |
| B | 4.00 | 4.60 |
| C | 1.27 | 1.63 |
| D | 0.15 | 0.31 |
| E | 4.80 | 5.59 |
| G | 0.10 | 0.20 |
| H | 0.76 | 1.52 |
| J | 2.01 | 2.62 |
| All Dimensions in mm | | |



Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Characteristic | Symbol | ES2AA | ES2BA | ES2CA | ES2DA | ES2EA | ES2GA | ES2JA | Unit |
|---|-----------------------------------|-------------|-------|-------|-------|-------|-------|-------|------|
| Peak Repetitive Reverse Voltage | V _{RRM} | | | | | | | | |
| Working Peak Reverse Voltage | V _{RWM} | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| DC Blocking Voltage | V _R | | | | | | | | |
| RMS Reverse Voltage | V _{R(RMS)} | 35 | 70 | 105 | 140 | 210 | 280 | 420 | V |
| Average Rectified Output Current @T _L = 75 °C | I _O | 2.0 | | | | | | | A |
| Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | 50 | | | | | | | A |
| Forward Voltage @I _F = 2.0A | V _{FM} | 0.95 | | | | 1.25 | | 1.7 | V |
| Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 100°C | I _{RM} | | | | | 5.0 | | 200 | μA |
| Reverse Recovery Time (Note 1) | t _{rr} | | | | | 35 | | | nS |
| Typical Junction Capacitance (Note 2) | C _j | | | | | 62 | | | pF |
| Typical Thermal Resistance (Note 3) | R _{θJL} | | | | | 40 | | | °C/W |
| Operating and Storage Temperature Range | T _j , T _{STG} | -65 to +150 | | | | | | | °C |

- Note: 1. Measured with I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A. See figure 5.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0 V DC.
 3. Mounted on P.C. Board with 8.0mm² land area.

RATING AND CHARACTERISTIC CURVES ES2AA THRU ES2JA

Fig. 1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM ES2AA THRU ES2JA

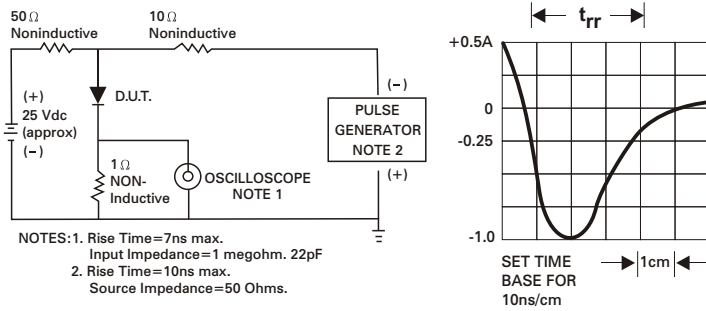


Fig. 2 - MAXIMUM AVERAGE FORWARD CURRENT RATING

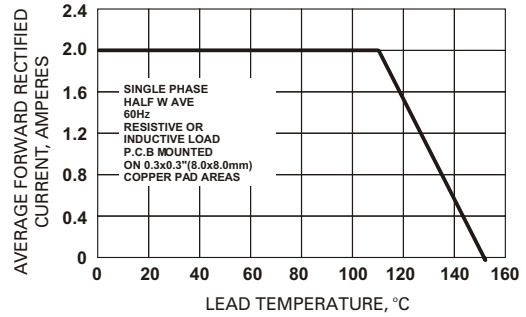


Fig. 3 - TYPICAL REVERSE CHARACTERISTICS

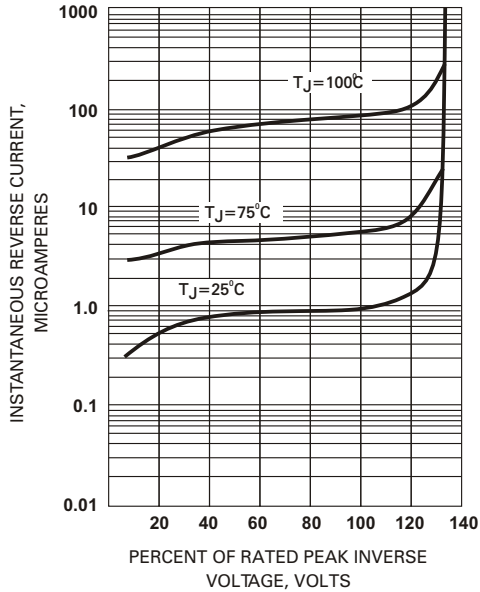


Fig. 4 - TYPICAL FORWARD CHARACTERISTICS

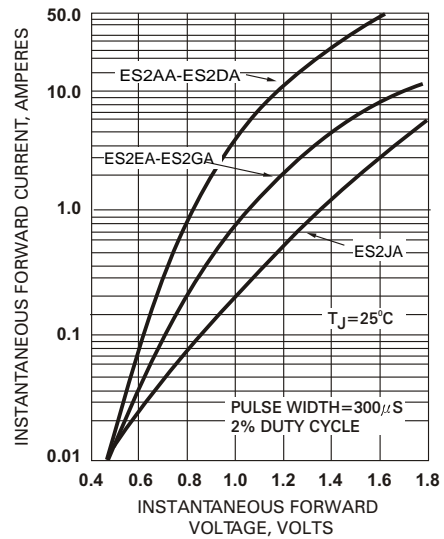


Fig. 5 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


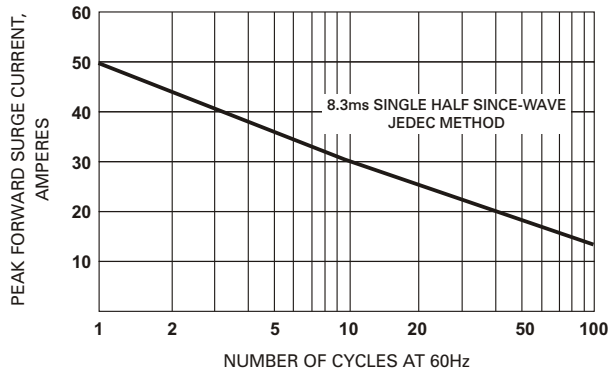


Fig. 6 - TYPICAL JUNCTION CAPACITANCE

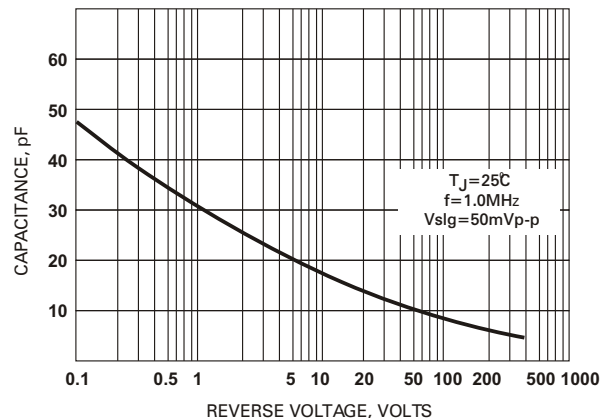

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)