

Telecoil-antennas Inductors


PAS3015EV-122K

1. Features

1. Hearing Aid Compatibility-/Telecoil-antennas;
2. PAS3010F-series realizes small size and low profile. 3.0x3.0x1.5 mm
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
4. Meets the T3/T4 FCC requirements(HAC) ANSI C63.19
5. Operating temperature :-55~+125°C (Including self - temperature rise)



2. Dimension

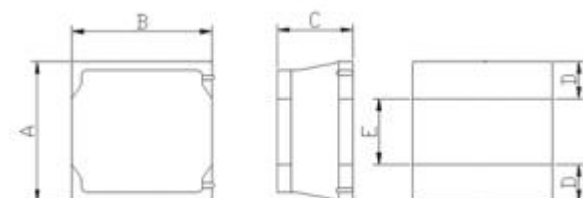

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
PAS3015	3.0±0.2	3.0±0.2	1.5max.	1.0 ref.	1.0 ref.

3. Part Numbering

PAS
3015
EV
-
122
K

A: Series
 B: Dimension
 C: Lead Free Vehicle
 D: Inductance 122=1200uH
 E: Inductance Tolerance K=±10%

4. Specification

Part Number	Inductance (uH)	Test Frequency(Hz)	RDC(Ω) Max.	Rated current (mA)Max.
PAS3015EV-122K	1200±10%	1V/10K	39.0	80

Note:

Heat Rated Current (I_{rms}) will cause the coil temperature rise approximately Δt of 40°C.

Saturation Current (I_{sat}) will cause L₀ to drop approximately 30%.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)