


# Wire Wound Power Common Mode Filter WCM1513FASV-SERIES-LM

## 1. Features

1. High reliability -Reliability tests comply with AEC-Q200
2. Operating temperature-40~+125°C (Including self - temperature rise)



## 2. Dimension

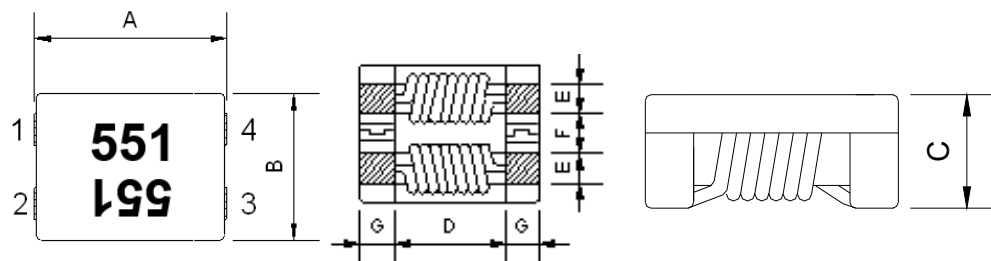

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
WCM1513	15.0±0.5	13.0±0.4	6.0 max.	9.3 Typ.	2.7±0.5	3.6±0.5	2.8±0.5

Unit:mm

## 3. Part Numbering






- A: Series  
 B: Dimension  
 C: Material Ferrite Core  
 D: Process Assembled  
 E: Type S=Shielded , N=Unshielded  
 F: Category Code V=Vehicle  
 G: Impedance 551=550Ω  
 H: Laser Marking

## 4. Specification


TAI-TECH Part Number	Impedance (Ω)		Test Frequency (MHz)	DC Resistance (mΩ) max. (1 line)	Rated Current (A) max.	Rated Volt. (Vdc) max.	Insulation Resistance (MΩ) min.
	min.	typ.					
WCM1513FASV-301-LM	200	300	100	3.5	14	125	10
WCM1513FASV-551-LM	450	550	100	4	10	125	10
WCM1513FASV-701-LM	500	700	100	5	10	125	10

Note:

- Measurement board data
- Material : FR4
- Board dimensions : 100 X 50 X 1.6t mm
- Pattern dimensions: 45 X 30 mm (Double side board)
- Pattern thickness : 50 μm

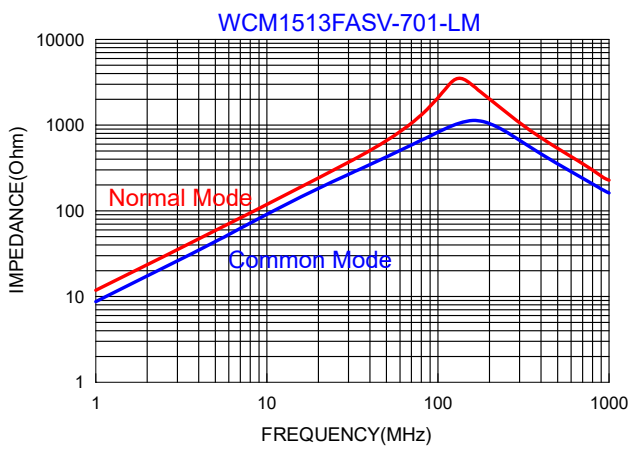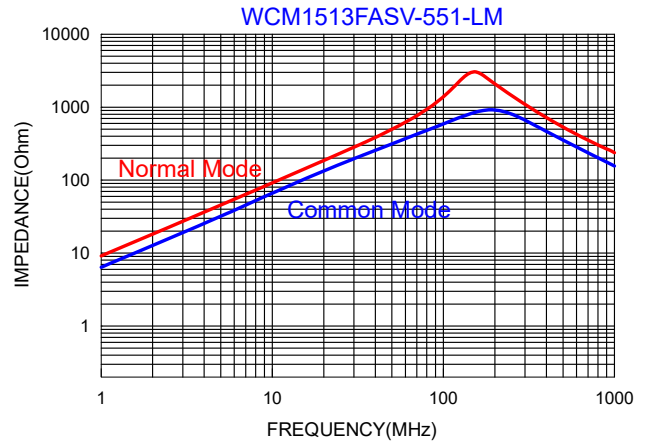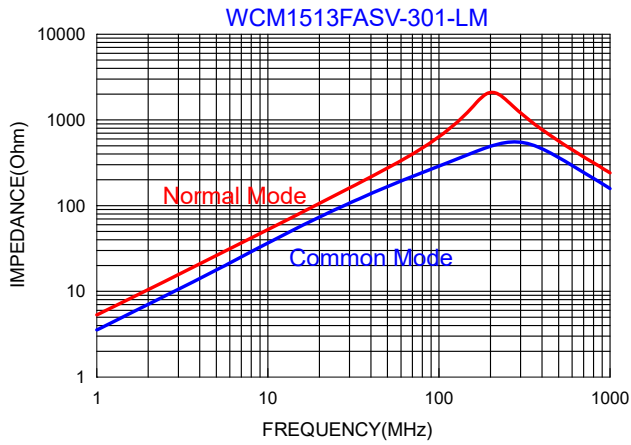

### 5. Schematic Diagram

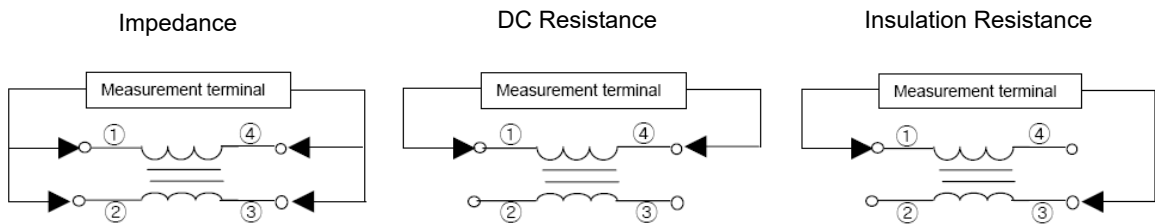

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)