

High Current Ferrite Chip Bead(Lead Free)

HFZ2012PF-SERIES


1. Features

1. Monolithic inorganic material construction.
2. Closed magnetic circuit avoids crosstalk.
3. Suitable for reflow soldering.
4. Shapes and dimensions follow E.I.A. spec.
5. High Current Bead Low RDC
6. Excellent solder ability and heat resistance.
7. High reliability.
8. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
9. Low DC resistance structure of electrode to prevent wasteful electric power consumption.
10. Operating Temperature : -55~+125°C (Including self-temperature rise)



Certificate
of
Green Partner


2. Dimensions



Chip Size	
A	2.00±0.20
B	1.25±0.20
C	0.85±0.20
D	0.50±0.30


Units: mm

3. Part Numbering



A: Series
 B: Dimension
 C: Material
 D: Impedance
 E: Packaging
 F: Rated Current

L x W
 Lead Free Material
 300=30Ω
 T=Taping and Reel, B=Bulk(Bags)
 85=8500mA

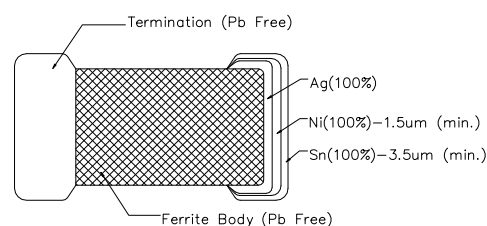


4. Specification

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (Hz)	DC Resistance (Ω) max.	Rated Current (mA) max.
HFZ2012PF-300T85	30±25%	60mV/100M	0.004	8500
HFZ2012PF-700T60	70±25%	60mV/100M	0.009	6000
HFZ2012PF-111T50	110±25%	60mV/100M	0.013	5000
HFZ2012PF-181T40	180±25%	60mV/100M	0.020	4000
HFZ2012PF-331T28	330±25%	60mV/100M	0.040	2800
HFZ2012PF-471T25	470±25%	60mV/100M	0.050	2500
HFZ2012PF-601T23	600±25%	60mV/100M	0.060	2300
HFZ2012PF-102T16	1000±25%	60mV/100M	0.120	1600

● Rated current: based on temperature rise test

Impedance Frequency Characteristics(Typical)

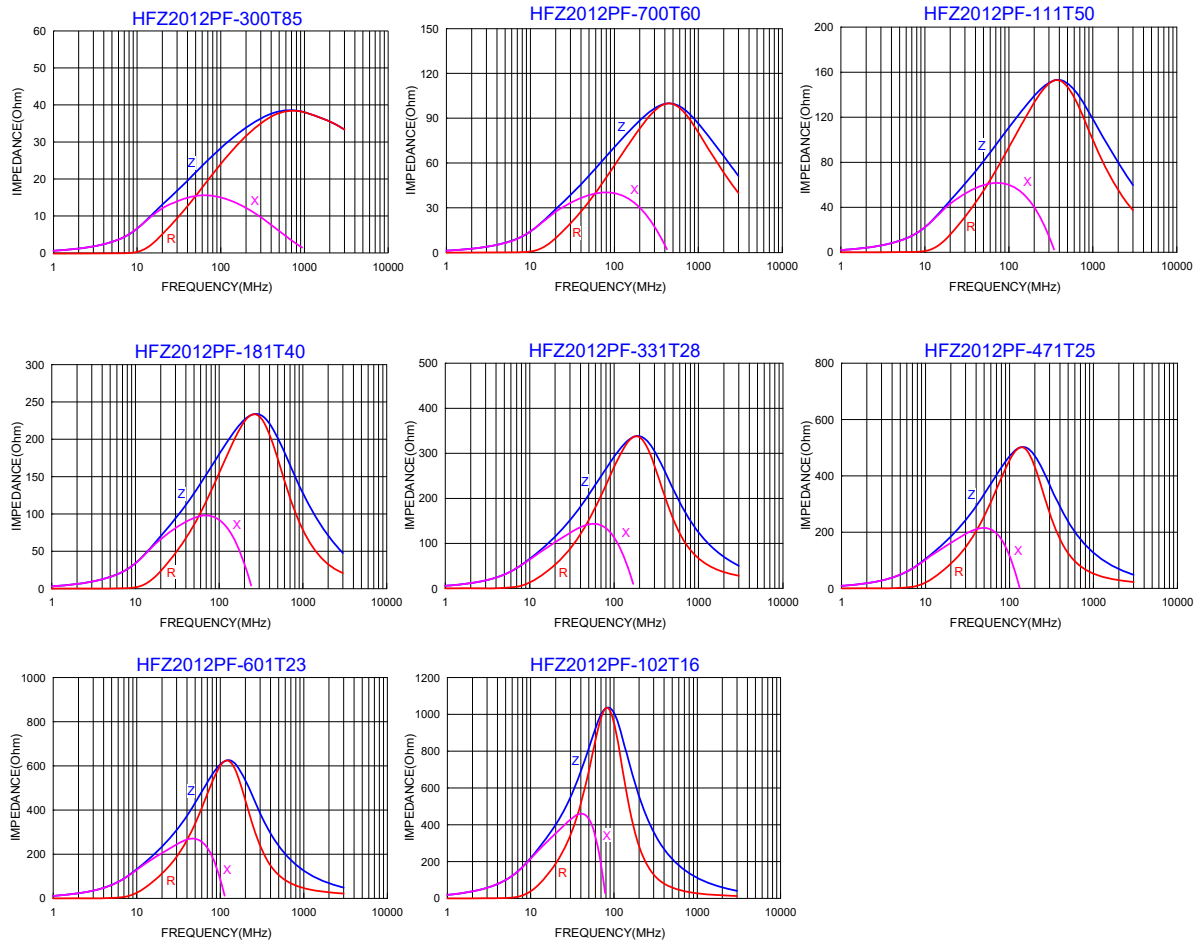

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)