

# Transponder Coils

PASU4420V- SERIES

## 1. Features


1. Suitable for pick and place and AOI (Automatic Optical Inspection)
2. PASU4420V-series realizes small size and low profile. 4.75x2.25x1.80 mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
4. Suitable for lead-free reflow soldering
5. High reliability -Reliability tests comply with AEC-Q200
6. Operating temperature-55~+125°C (Including self - temperature rise)



## 2. Applications

1. T-coil/HAC-coil for hearing and aid compatible cell phones.
2. Decoupling in RF and IF-circuit.
3. Transponder antenna.


## 3. Dimensions

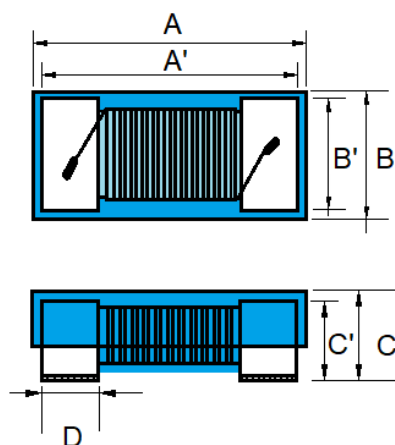

Size	A(mm)	A'(mm)	B(mm)	B'(mm)	C(mm)	C'(mm)	D(mm)
PASU4420V	4.75±0.30	4.40±0.20	2.25±0.30	2.00±0.20	1.80±0.30	1.80±0.20	0.80 ref.

### Recommend PC Board Pattern

Units : mm



L(mm)	G(mm)	H(mm)
4.8	3.2	2.3

## 4. Part Numbering

<b>PASU</b>	<b>4420</b>	<b>V</b>	-	<b>252</b>	<b>M</b>	-	<b>F10</b>
A	B	C		D	E		F

- A: Series  
 B: Dimension L x H  
 C: Category Code V=Vehicle  
 D: Inductance 252=2500 uH  
 E: Inductance Tolerance K=±10% M=±20%  
 F: Test Frequency 10 KHZ

## 5. Specification

Part Number	Inductance (uH)	Tolerance	f <sub>L0</sub> (kHz)	SRF (MHz)Typ.	RDC (Ω)Max.	Rated current (mA) max.
PASU4420V-252□-F10	2500	K,M	10	1.0	82	40
PASU4420V-352□-F10	3500	K,M	10	1.0	85	20

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)